



SECTION .3

NOIRETTE PLUS WS



MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	630 / 660 mm
RISE	34 mm
SWEEP	41°
WEIGHT	315 g (W:660)



SHINY BK SHINY SV MAT BK MAT SV



WS
FLATTED WING SHAPE
IN SMOOTH


WIEN



MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	640 / 680 mm
RISE	20 mm
SWEEP	35° / 15°
WEIGHT	305 g (W:640)



SHINY BK SHINY SV MAT BK MAT SV

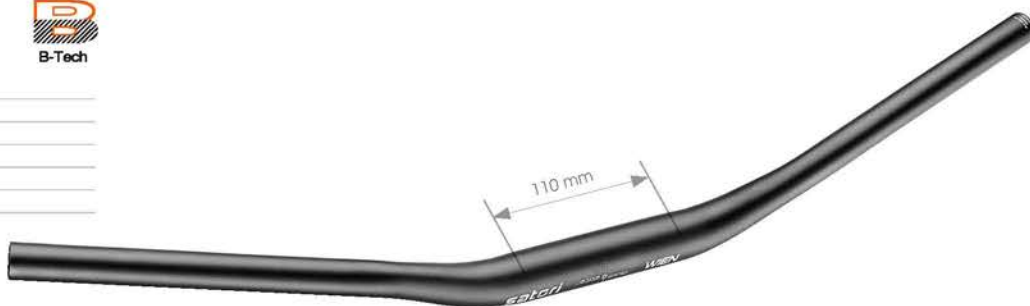

HLCORP. 信隆車料工業股份有限公司
18 Kuang Fu North Road Hsinchu Industrial Park Hu Ko Hsinchu Hsien, Taiwan.
TEL : 886-3-5983721 FAX : 886-3-5981861 E-mail : sales@satoribike.com



Scan for full catalog

T-STEALTH

MATERIAL	AL-6061
EXTENSION	80 / 90 / 100 / 110
ANGLE	+7°
WIDTH	560 / 580 / 600 / 620
RISE	4°
SWEEP	7°
WEIGHT	357g (W:600 / E:80)



MAT BK MAT SV



X-RACE AERO CARBON

MATERIAL	HIGH MODULUS CARBON FIBER
CENTER DIA	Ø31.8
WIDTH	400 / 420 / 440 / 460 mm
DROP (D)	120 mm
REACH (R)	65 mm
FLARED	8°
WEIGHT	200 g (W:420)



WING SHAPE
COMFORT HAND GRIP.

BOONDOCKS



MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	440 / 480 mm
DROP (D)	110 mm
REACH (R)	76 mm
FLARED	21°
WEIGHT	278 g (W:440)



BOOMERANG



MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	440 / 480 mm
DROP (D)	120 mm
REACH (R)	87 mm
FLARED	21°
WEIGHT	328 g (W:480)



FALCON AERO

MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	700 / 720 / 740 / 760
RISE	0 mm
SWEEP	15°
REACH	120mm
WEIGHT	504g (W:760)
STANDER	ISO 4210-M



FALCON



MATERIAL	AL6061
CENTER DIA	Ø31.8
WIDTH	620 / 640 / 660 / 680 / 700 / 720 / 740 / 760
RISE	0 mm
SWEEP	15°
WEIGHT	306g (W:760)
STANDER	ISO 4210-M



HANDLEBAR

Technology and Creation Always IN-TEK CORP.



ITC-ID211S

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 400-500mm
Bar Bore: 22.2mm
Grip Bore: 19.1mm
Raise: 11-30mm



ITC-6818A-01

Alloy PG / D.B. / T.B.
Width: 560-700mm
Bar Bore: 25.4 / 31.8mm
Raise: 25-100mm




ITC-HD111C

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 730-760mm
Bar Bore: 22.2mm
Raise: 210-245mm




ITC-IB726W

Alloy PG / DB / TB
Width: 720mm
Bar Bore: 25.4 / 31.8mm
Raise: 20mm




ITC-ID922W

Alloy PG / D.B. / T.B.
Width: 550-650mm
Bar Bore: 31.8mm
Raise: 20mm



ITC-6420C

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 560-735mm
Bar Bore: 22.2mm
Raise: 120-210mm



ITC-HC245D

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 560-735mm
Bar Bore: 22.2mm
Raise: 120-210mm



ITC-6685C

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 560-735mm
Bar Bore: 22.2mm
Raise: 120-230mm



ITC-HC290A

Alloy & Steel & Cr-Mo & Cr-Mo DB
Width: 560-735mm
Bar Bore: 22.2mm
Raise: 120-210mm



ITC-M07

Steel & Cr-Mo
Width: 690mm
Bar Bore: 22.2mm
Raise: 180mm



ITC-JB916A

Alloy PG / DB / TB
Width: 380/400/420/440mm
Bar Bore: 25.4/26.0/31.8mm



ITC-JD800X

Alloy PG / DB / TB
Width: 380/400/420/440mm
Bar Bore: 31.8mm



ITC-JC407A

Alloy PG / DB / TB
Width: 380/400/420/440mm
Bar Bore: 25.4/26.0/31.8mm




ITC-JC408A

Alloy PG / DB / TB
Width: 380/400/420/440mm
Bar Bore: 25.4/26.0/31.8mm




ITC-6358

Steel & Alloy
Width: 580/680mm
Bar Bore: 22.2/25.4/31.8mm

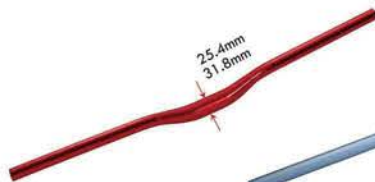

ITC-N04D

Alloy PG / DB / TB
Width: 500-780mm
Raise: 15-70mm
Bar Bore: 25.4/31.8mm

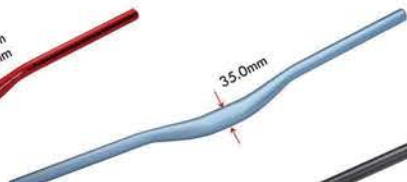

ITC-IC011A

Alloy PG / DB / TB
Width: 500-780mm
Raise: 15-70mm
Bar Bore: 35.0mm



ITC-IF1128AG

Alloy W / Welding
Width: 550 - 780mm
Raise: 0 - 50mm
Extension: 45 - 120mm



ITC-6625

Alloy PG / DB / TB
Width: 540, 570mm
Bar Bore: 25.4 / 31.8mm
Raise: 0mm



ITC-6981

Alloy
Width: 515mm
Bar Bore: 25.4mm
L420 x W335 x H170mm



IN-TEK CORP.

Asia Bike Media 150

盈昌事業有限公司

彰化縣51648埔鹽鄉成功路一段288號
No. 288, Sec. 1, Chenggong Road, PuYen Hsiang,
Changhua 51648, Taiwan
Tel: +886-4-8853088 Fax: +886-4-8852306
E-mail: ken@in-tek.com.tw / ken.lee8899@msa.hinet.net

崇鑫金屬(惠州)有限公司

廣東省惠州市仲愷高新區歷林鎮環城街23號
No.23, Huancheng street, Lilin town, Zhongkai
high-tech zone, Huizhou City, Guangdong, China.
Tel: +86-752-3868101, 3868102 Fax: +86-752-3868106



HB-9188DB R30

Material: Carbon
Bar bore: Ø31.8mm
Back sweep: 9°
Up sweep: 5°
Width: 780mm
Rise: 30mm
Weight: 206g
Finish: Carbon Fiber 3K Weave
Packing: 25pcs / ctn / 1.9cuf
Produced in: Taiwan



HB-3188DB

HB-7188DB DOUBLE BUTTED
HB-3188DB DOUBLE BUTTED
HB-3188

Material: HB-3188DB: AL6061
HB-3188: AL6061
HB-7188DB: AL2014
Ø31.8mm
Bar bore: Ø31.8mm
Back sweep: HB-3188DB: 8°
HB-3188: 6°/ 8°/ 9°/ 15°
HB-7188DB: 9°
Up sweep: HB-3188DB: 6°/ 2°
Width: HB-3188DB: 560 / 600 / 610 / 620 / 640 / 660 / 680 / 700mm
HB-3188: 560 / 580 / 600 / 620 / 640 / 680 / 700mm
HB-7188DB: 740mm
Rise: HB-3188DB: 13mm
Weight: HB-3188DB: 256g, 620mm R25
221g, 600mm R18
HB-3188: 303g, 620mm x 9°
HB-7188DB: 283g, 740mm x 9°
Finish: Black / Silver / Anodized / S.B color
Packing: HB-3188DB: 50pcs / ctn / 1.49cuf, 620mm
HB-3188: 50pcs / ctn / 1.36cuf, 620mm
HB-7188DB: 50pcs / ctn / 1.63cuf, 740mm
Produced in: China



HB-3498DBFT DOUBLE BUTTED (FLAT TOP)

Material: AL6061
Bar bore: Ø34.9mm
Back sweep: 6°
Up sweep: 0°
Width: 700mm
Rise: 6mm
Weight: 286g
Finish: Black / Silver / Anodized / S.B color
Packing: 25pcs / ctn / 1.9cuf
Produced in: China



HB-3498DB R11/R28 DOUBLE BUTTED

Material: AL6061
Bar bore: Ø34.9mm
Back sweep: R11: 7°
R28: 9°
Up sweep: 5°
Width: R11: 760mm
R28: 780mm
Rise: R11: 15mm
R28: 30mm
Weight: R11: 341.3g
R28: 345.6g
Finish: Black / Silver / Anodized / S.B color
Packing: 25pcs / ctn / 1.9cuf
Produced in: China



HB-M301DB DOUBLE BUTTED
HB-M301

Material: AL6061
Bar bore: Ø25.4mm
Back sweep: HB-M301DB: 8°
HB-M301: 3° / 6° / 8° / 9° / 15° / 20°
Width: HB-M301DB: 600 / 620 / 640 / 660mm
HB-M301: 400 / 450 / 480 / 500 / 520 / 580 / 600 / 640 / 680 / 720mm
Weight: HB-M301DB: 245g, 660mm
HB-M301: 353g, 600mm x 9°
Finish: Black / Silver / Anodized / S.B color
Packing: HB-M301DB: 50pcs / ctn / 1.31cuf, 660mm
HB-M301: 50pcs / ctn / 0.86cuf, 600mm
Produced in: China



HB-3018DBFT DOUBLE BUTTED (FLAT TOP)

Material: AL6061
Bar bore: Ø31.8mm
Up / Back sweep: 0° / 6°, 4° / 10°
Width: 600~720mm
Weight: 306g, 700mm
Finish: Black / Silver / Anodized / S.B color
Packing: 50pcs / ctn / 1.51cuf, 660mm
Produced in: Taiwan / China



HB-T305DB DOUBLE BUTTED
HB-T305/HB-T205/HB-T205ST

Material: HB-T305DB: Alloy
HB-T305: Alloy
HB-T205ST: Stainless
HB-T205: Hi-ten steel
Ø25.4mm
Bar bore: Ø25.4mm
Back sweep: HB-T305DB: 8°
HB-T305 / HB-T205 / HB-T205ST: 6° / 9° / 15° / 19° / 25°
Up sweep: HB-T305DB: 6°
Width: HB-T305DB: 600 / 620 / 640mm
HB-T305 / HB-T205 / HB-T205ST: 420 / 460 / 500 / 520 / 600 / 620 / 640 / 680 / 700 / 710mm
Finish: Black / Silver / Anodized / S.B / CP color
Weight: HB-T305DB: 248g, 640mm
HB-T305: 261g, 620mm x 15°
HB-T205: 430g, 580mm x 15°
HB-T205ST: 370g, 580mm x 15°
Packing: HB-T305DB: 50pcs / ctn / 1.05cuf, 640mm
HB-T305: 50pcs / ctn / 1.36cuf, 620mm
HB-T205: 50pcs / ctn / 1.27cuf, 580mm
HB-T205ST: 20pcs / ctn / 3.96cuf, 580mm
Produced in: China



HB-3018DB DOUBLE BUTTED
HB-3018

Material: AL6061
Bar bore: Ø31.8mm
Back sweep: 6°
Width: HB-3018DB: 560 / 580 / 600 / 620 / 640 / 660 / 680 / 700mm
HB-3018: 580 / 600 / 620 / 630 / 640mm
HB-3018DB: 290g, 600mm
HB-3018: 305g, 600mm
Finish: Black / Silver / Anodized / S.B color
Packing: 50pcs / ctn / 1.18cuf, 600mm
Produced in: China



HB-T319TP

Material: AL6061
Bar bore: Ø31.8mm
Back sweep: 25° / 44°
Up sweep: 0°
Width: 610 / 630mm
Rise: 25mm
Weight: 402g; 630mm ext.
Finish: Black / Silver / Anodized / S.B. color
Produced in: China



HB-T319/HB-T219ST/HB-T219

Material: HB-T319: Alloy
HB-T219ST: Stainless
HB-T219: Hi-ten steel
Bar bore: Ø25.4mm
Back sweep: 30°
Up sweep: 3°
Width: 480 / 540 / 560 / 580 / 590 / 600 / 610mm
Rise: 30 / 40mm
Weight: HB-T319: 267g; 580mm
HB-T219: 475g; 580mm
HB-T219ST: 393g; 560mm
Finish: Black / Silver / Anodized / S.B. / CP color
Packing: HB-T319: 50pcs / ctn / 1.82cuft; 580mm
HB-T219: 50pcs / ctn / 1.48cuft; 580mm
HB-T219ST: 50pcs / ctn / 1.43cuft; 560mm
Produced in: China



HB-T320/HB-T220

Material: HB-T320: Alloy
HB-T220: Hi-ten steel
Bar bore: Ø25.4mm
Back sweep: 23° / 35° / 36° / 41° / 45°
Width: 520 / 530 / 560 / 580 / 600 / 610 / 640mm
Weight: HB-T320: 301.8g; 600mm x 45°
HB-T220: 530g; 600mm x 45°
Finish: Black / Silver / Anodized / S.B. / CP color
Packing: HB-T320: 50pcs / ctn / 1.98cuft; 600mm
HB-T220: 30pcs / ctn / 1.49cuft; 600mm
Produced in: China



HB-T318/HB-T218

Material: HB-T318TP: Alloy
HB-T218: Hi-ten steel
Bar bore: Ø25.4mm
Back sweep: 11°
Width: 580mm
Weight: HB-T318: 438g; 580mm
HB-T218: 806g; 580mm
Finish: Black / Silver / Anodized / S.B. / CP color
Packing: HB-T318: 25pcs / ctn / 2.36cuft
HB-T218: 25pcs / ctn / 2.34cuft
Produced in: China



HB-T323

Material: Alloy
Bar bore: Ø25.4mm
Width: 390 / 430 / 435 / 455 / 500 / 510 / 515mm
Back sweep: 41°
Rise: 131 / 151 / 161mm
Weight: 354g
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 3.46cuft; 430mm
Produced in: China



HB-T316/HB-T216

Material: HB-T316: Alloy
HB-T216: Hi-ten steel
Bar bore: Ø25.4mm
Back sweep: 7° / 12°
Up sweep: 3°
Width: 570 / 590 / 600 / 640mm
Weight: HB-T316: 475g; 590mm x 7°
HB-T216: 837g; 590mm x 12°
Finish: Black / Silver / Anodized / S.B. / CP color
Packing: HB-T316: 25pcs / ctn / 2.67cuft; 600mm
HB-T216: 25pcs / ctn / 2.63cuft; 590mm
Produced in: China



HB-B201

Material: Hi-ten steel
Bar bore: Ø22.2mm
Back sweep: 6° / 9° / 10° / 11° / 12°
Up sweep: 1° / 2° / 3°
Width: 560 / 580 / 630 / 635 / 650 / 660 / 680 / 740mm
Weight: 998g; 660mm x 6°
Finish: C.P. / Stain color
Packing: 20pcs / ctn / 2.70cuft; 660mm
Produced in: China



BE-318 CNC 7075

Super light & strong designed

Material: 3D forged AL7075 w/ Ti-bolts
Length: 99mm
Weight: 52g / pair
Finish: Anodized / S.B. color
Packing: 50pairs / ctn / 0.5cuft
Produced in: Taiwan



BE-318 CNC/BE-318

Light-weight designed with CNC machining
Light-weight designed

Material: 3D forged AL6061
Length: 118mm
Weight: BE-318CNC : 58g / pair; BE-318 : 77g / pair
Finish: Anodized / S.B. color
Packing: 50pairs / ctn / 0.5cuft
Produced in: Taiwan



BE-316

Ergonomic designed to support better control and protect the entire palm during long riding and cold weather. Comfortable touch and reduced hand fatigue

Material: Alloy with Kraton
Length: 124mm
Weight: 143g / pair
Color: customer requested
Produced in: Taiwan



BE-317

Ergonomic designed for left and right hand comfort. One-piece alloy with Kraton for the thumb comfort

Material: Alloy
Length: 105mm
Weight: 142g / pair
Color: Customer requested
Produced in: Taiwan



BE-315

Ergonomic designed for left and right hand comfort

Material: Alloy
Length: 82mm
Weight: 115g / pair
Finish: Powder coated color
Packing: 50pairs / ctn / 0.53cuft
Produced in: Taiwan



BE-401H

3D forged AL6061 bar end

Length: 95mm
Weight: 138g / pair
Finish: S.B. color
Packing: 50pairs / ctn / 0.87cuft
Produced in: Taiwan

BE-701H/BE-701HCF

Cold-forged Alloy bar end
BE-701HCF: Alloy with 3K Carbon Fiber Wwrap

Length: BE-701H: 95 / 115mm
BE-701HCF: 95mm
Weight: BE-701H: 74 / 79g
BE-701HCF: 74g
Finish: BE-701H: Black / Silver
BE-701HCF: 3K Carbon Fiber Weave
Packing: 50pairs / ctn / 0.87cuft
Produced in: China

BE-353H/253H

BE353H: Welded alloy
BE253H: Welded hi-ten steel

Length: BE353H: 90 / 110mm
BE253H: 80 / 85 / 105mm
Weight: BE353H: 78g / 85g pair
BE253H: 108g / pair
Finish: BE353H: Black / Silver
BE253H: Black / C.P. / Satin
Packing: 50pairs / ctn / 0.87cuft
Produced in: China



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: salechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



HB-3055DB

Material: AL6061
Bar bore: Ø31.8mm
Reach: 74mm
Drop: 113.8mm
Width: 380 / 400 / 420 / 440mm
Weight: 370g; 440mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 3.31cwt; 400mm ext.
Produced in: China



HB-3045DB DOUBLE BUTTED

Material: AL6061
Bar bore: Ø31.8mm
Reach: 80mm
Drop: 120mm
Width: 380 / 400 / 420 / 440mm
Weight: 375g; 440mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 3.31cwt; 400mm
Produced in: China



HB-3051DB

Material: AL6061
Bar bore: Ø31.8mm
Reach: 73mm
Drop: 125mm
Width: 400 / 420 / 440mm
Weight: 313g; 440mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 3.31cwt; 440mm
Produced in: China



HB-3049

Material: AL6061
Bar bore: Ø25.4mm
Reach: 120mm
Drop: 130mm
Width: 400 / 420mm
Weight: 445g; 420mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 3.31cwt; 400mm
Produced in: China



HB-3053DB (FLARE-OUT BENDED)

Material: AL6061
Bar bore: Ø31.8mm
Reach: 80mm
Drop: 125mm
Width: 380 / 400 / 420 / 440 / 460mm
Weight: 315g; 440mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 3.31cwt; 400mm
Produced in: China



HB-3039

Material: AL6061
Option: Alloy with Carbon Fiber Wrapped
Bar bore: Ø31.8mm
Width: 400 / 420 / 440mm
Weight: 500g; 400mm
Finish: HB-3039TP: Black / Silver / S.B. color
HB-3039TPCF: Carbon Fiber 3K Weave Wrap
Packing: 30pcs / ctn / 3.27cwt; 400mm
Produced in: China



HB-3048DB

Material: AL6061
Bar bore: Ø31.8mm
Back sweep: 10°
Rise: 125mm
Width: 380 / 400 / 420 / 440mm
Weight: 379g; 420mm ext.
Finish: Black / Silver / Anodized / S.B. color
Produced in: China



HB-3037TP

Material: AL6061
Bar bore: Ø26mm
Reach: 80mm
Drop: 125mm
Width: 380 / 400 / 420mm
Weight: 547g; 420mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 25pcs / ctn / 3.31cwt; 400mm
Produced in: China



HB-3043DB DOUBLE BUTTED

Material: AL6061
Bar bore: Ø31.8mm
Reach: 80mm
Drop: 120mm
Width: 380 / 400 / 420 / 440mm
Weight: 387g; 440mm
Finish: Black / Silver / Anodized / S.B. color
Packing: 20pcs / ctn / 3.37cwt; 400-420mm
Produced in: China



HB-T323TP

Material: AL6061
Bar bore: Ø31.8mm
Back sweep: 41°
Width: 435 / 455mm
Rise: 161mm
Weight: 405g; 455mm ext.
Finish: Black / Silver / Anodized / S.B. color
Produced in: China



LCH-N06

DH/END/AM

Material	Alloy 6061DB / 7050DB
Width	760/780/800 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	35.0 mm
Backsweep/Upsweep	9° / 5°
Weight	372g (800*0.5"-6061DB)



LCH-N08 (POWER BAR)

DH/END/AM

Material	Alloy 6061DB / 7050DB
Width	760/780/800 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	31.8 / 35.0 mm
Backsweep/Upsweep	9° / 5°
Weight	340g (780*0.5"-6061DB)



LCH-N04F

DH/END

Material	Alloy 6061PG / 6061DB / 7050DB
Width	760/780/800 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	31.8 mm
Backsweep/Upsweep	9° / 5°
Weight	375g (800*1"-6061DB)



LCH-N04

AM/TRAIL

Material	Alloy 6061PG / 6061DB / 7050DB
Width	700/720/740 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	31.8 mm
Backsweep/Upsweep	9° / 5°
Weight	300g (700*1"-6061DB)



LCH-N04M

TRAIL/XC

Material	Alloy 6061PG / 6061DB / 7050DB
Width	600/620/640/660/680 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	31.8 mm
Backsweep/Upsweep	9° / 5°
Weight	260g (660*1"-6061DB)



LCH-N18 (TOPFLAT BAR)

TRAIL/XC/29ER

Material	Alloy 6061DB (Hydroform)
Width	680/700/720/740/760 mm
Rise	0°
Barbore	31.8 mm
Backsweep/Upsweep	9°
Weight	285g (700-6061DB)



LCH-N056

TRAIL/XC/29ER

Material	Alloy 6061PG / 6061DB / 7050DB
Width	600/620/640/660/680/700/720/740 mm
Rise	0°
Barbore	31.8 mm
Backsweep/Upsweep	9°
Weight	298g (700mm-6061DB)



LCH-N05

TRAIL/XC/SPORT

Material	Alloy 6061PG / 6061DB / 7050DB
Width	520/540/560/580/600/620/640/660/680/700/720 mm
Rise	0°
Barbore	31.8 mm
Backsweep/Upsweep	5°
Weight	240g (720mm-7050DB)



LCH-N07

XC/SPORT

Material	Alloy 6061PG / 6061DB / 7050DB
Width	600/620/640/660/680/700/720/740 mm
Rise	0.5" / 1" / 1.5" / 2"
Barbore	25.4 mm
Backsweep/Upsweep	9° / 5°
Weight	315g (700*1.5"-6061DB)



LCH-6179

URBAN

Material	Alloy 6061
Width	630 mm
Rise	20°
Barbore	31.8 mm



HANDLEBAR



LCH-681

URBAN

Material	Alloy / Steel
Width	480 ~ 620 mm
Rise	40 ~ 60 mm
Barbore	25.4 mm
Backsweep	6° / 9°
Upsweep	0°



LCH-685

URBAN

Material	Alloy / Steel
Width	380 ~ 620 mm
Rise	0 mm
Barbore	25.4 mm
Backsweep	6° / 10°



LCH-684

URBAN

Material	Alloy / Steel
Width	500 ~ 620 mm
Rise	0 mm
Barbore	25.4 mm
Backsweep	20°



LCH-635

URBAN

Material	Alloy / Steel
Width	600 / 635 mm
Rise	80 / 100 mm
Barbore	25.4 mm



LCH-686

URBAN

Material	Alloy 6061PG / 6061DB
Width	585 / 610 / 630 mm
Barbore	25.4 / 31.8 mm
Backsweep	15°



LCH-6173

URBAN

Material	Alloy 6061
Width	580 mm
Barbore	25.4 / 31.8 mm



LCH-6951

FIXIE

Material	Alloy 6061
Width	400 / 420 / 440 mm
Barbore	25.4 / 26.0 / 31.8 mm



LCH-6621

URBAN

Material	Alloy 6061PG
Width	660 mm
Rise	13 mm
Barbore	31.8 mm
Backsweep	45°



LCH-6060

ROAD

Material	Hydroform
Width	400 / 420 / 440 mm
Barbore	31.8 mm
Drop	120 mm
Reach	70 mm



LCH-6068

ROAD

Material	Alloy 6061PG / 6061DB
Width	400 / 420 / 440 / 460 mm
Barbore	31.8 mm
Drop	120 mm
Reach	70 mm



LCH-6072

ROAD

Material	Alloy 6061PG / 6061DB
Width	380 / 400 / 420 / 440 mm
Barbore	31.8 mm
Drop	120 mm
Reach	70 mm



LCH-6078

ROAD

Material	Alloy 6061PG / 6061DB
Width	380 / 400 / 420 mm
Barbore	31.8 mm
Drop	125 mm
Reach	85 mm



LCH-6087

ROAD

Material	Alloy 6061PG / 6061DB
Width	380 / 400 / 420 / 440 mm
Barbore	31.8 mm
Drop	146 mm
Reach	85 mm



LCH-609

ROAD

Material	Alloy 6061PG / 6061DB
Width	380 / 400 / 420 / 440 mm
Barbore	26.0 / 31.8 mm
Drop	153 mm
Reach	85 mm



LCH-6667

BMX

Material	Steel / Cr-Mo
Width	635 ~ 736 mm
Rise	180 ~ 228 mm
Barbore	22.2 mm



LCH-648

BMX

Material	Steel / Cr-Mo
Width	635 mm
Rise	177 mm
Barbore	22.2 mm



LCH-652

BMX

Material	Steel
Width	420 ~ 710 mm
Rise	110 / 127 / 165 / 193 mm
Barbore	22.2 mm





Welcome To Visit FPD Website,
All Of Our Pedals Are On Our Website.

www.fpd-fasten.com.tw

FPD INDUSTRY CORP. 豐德興業股份有限公司

台中市烏日區五光路189巷136號

No. 136, Ln. 189, Wuguang Rd., Wurih Dist., Taichung City 41470, Taiwan

Tel | +886-4-2338-9808 Fax | +886-4-2338-2807 Mail | fpd@fpd-fasten.com.tw

FASTEN PRODUCTS MFG Ltd. 豐德精密實業(深圳)有限公司

中國深圳寶安區沙井鎮大王山工業四路四號

No. 4, Dawangshan Industrial 4th Road, Shajing Town, Baoan District, Shenzhen, China

Tel | +86-755-3366-8388 Fax | +86-755-3366-8996 Mail | fpdinf@fpdfasten.com

FASTEN PRODUCTS MFG (XIAMEN) LTD. 漳浦瑞柏自行車有限公司

中國福建省漳州市漳浦縣舊鎮鎮舊鎮工業園

Jiuzhen Industrial Zone, Jiuzhen Town, Zhangpu County, Zhangzhou city, Fujian, China

Tel | +86-596-3921360 Fax | +86-596-3921365 Mail | fpdinf@fpdfasten.com



FPD-A01/A02

EXTENSION 70/80/90/100/110/120mm
BARBORE A01:25.4/26mm,A02:31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 45mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-A03/A04

EXTENSION 70/80/90/100/110/120mm
BARBORE A03:31.8mm,A04:25.4/26mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 41mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B01

EXTENSION 80/90/100/110/120mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 45mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B02

EXTENSION 80/90/100/110mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 41mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B03

EXTENSION 60/70/80/90/100/110/120mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 40mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B04

EXTENSION 70/80/90/100/110/120mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 41mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B05

EXTENSION 70/80/90/100mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 40mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B06

EXTENSION 70/80/90/100/110mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 40mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-B07

EXTENSION 90/100/110mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-6 degree
HEIGHT 35mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-D001

EXTENSION 45/50mm
BARBORE 31.8mm/35mm
STEERER 28.6mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-D002

EXTENSION 50mm
BARBORE 31.8mm
STEERER 28.6mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-M001

EXTENSION 35mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 35mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-M003

EXTENSION 40mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 40mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-C01

EXTENSION 35/50mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 45mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-C02

EXTENSION 50/55/65/70/80mm
BARBORE 31.8mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 45mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-C03

EXTENSION 48mm
BARBORE 22.2mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 40mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-X001

EXTENSION 50mm
BARBORE 22.2mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 35mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-X002

EXTENSION 50mm
BARBORE 22.2mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 35mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]



FPD-X003

EXTENSION 50mm
BARBORE 22.2mm
STEERER 28.6mm
ANGLE +/-0 degree
HEIGHT 41.2mm
6061-T6 3D FORGED
EN-R/MI [14781/14767]

HANDLEBAR STEMS

EVERYTHING IS POSSIBLE



Pivotal Seat Post

Pivotal seat pot

Model	Diameter	Length(mm)
EP-012	22.2	135
EP-012	25.4	135
EP-015	25.4	320
EP-015	26.8	320
EP-015	27.0	320
EP-015	27.2	320
EP-015	30.9	320
EP-015	31.6	320

Road bar and TT bar



Model > Godspeed
Shape > Compact/Anatomic
Material > PMX/2014/6061
Width > 380-440

Model > Godspeed TT
Material > 7075/6061
Width > 400-440
Clamping Dia > 31.8



Flat Bar

Model > Dragon
Material > 7050/2014/6061
Width > 600
Clamping Dia > 31.8
Back Sweep > 5

Riser Bar

Model > Rockstone
Material > 7050/2014/6061
Width > 640-685
Rise > High/Mid/Low
Back Sweep > 9
Up Sweep > 5

Model > Dargon Carbon
Material > UD Carbon Fiber
Width > 600
Weight > 118g
Back Sweep > 5



Carbon

Model > Godspeed Carbon
Material > UD Carbon Fiber
Width > 400/420/440
Weight > 200g @ 420mm
Drop > 125
Reach > 70
Shape > Round

www.premetec.com.tw

Hydro Forming Tubes

T7086PM

Description > Top Tube with Internal Cable Design
Material > 6061 Butted
Length > 600mm
Weight > 300g

T7116PM

Description > Top Tube
Material > 6061 Butted
Length > 650mm
Weight > 360g

T7076PM

Description > Top Tube with Internal Cable Design
Material > 6061 Butted
Length > 680mm
Weight > 300g

S4076PM

Description > Seat Tube
Material > 6061 Butted
Length > 700mm
Weight > 380g

D4126PM

Description > Down Tube
Material > 6061 Butted
Length > 725mm
Weight > 400g

D4166PM

Description > Down Tube
Material > 6061 Butted
Length > 730mm
Weight > 580g

D7116PM Double internal cable design

Description > Down Tube with Internal Cable Design
Material > 6061 Butted
Length > 720mm
Weight > 395g

D7040PM

Description > Down Tube
Material > 6061 Butted
Length > 700mm
Weight > 390g

D7166PM

Description > Down Tube
Material > 6061 Butted
Length > 775mm
Weight > 430g

D4116PM

Description > Down Tube with Internal Cable Design
Material > 6061 Butted
Length > 680mm
Weight > 360g

Suspension Fork Tube



7050 Alloy

Size > 30-36mm
Roughness > ID Ra0.2mm
OD Ra0.2mm
Length > 320-540mm

PREMETEC
YEU CHUEH INDUSTRY CO., LTD.

9, Ton 1 Street, Youth Industry Park, Tachia,
Taichung 43770, Taiwan
Tel:886-4-26814791 Fax:886-4-26810599
Web Site:www.premetec.com.tw
E-mail:premetec@tcts.seed.net.tw



OPTIONAL:
Faceplate with integrated lamp holder

SATORI-UP2+



MATERIAL	3D FORGED
EXTENSION	65 / 90 / 110
BAR BORE	Ø31.8
STEERER	Ø28.6 mm
ANGLE	0° ~ +90°
LENGTH	68 mm (Steerer clamp insert 41 mm)
WEIGHT	398 g (E:110)



SATORI-UP3



MATERIAL	3D FORGED
EXTENSION	90 / 110
BAR BORE	Ø31.8
STEERER	Ø28.6 mm
ANGLE	0° ~ 90°
LENGTH	70 mm
WEIGHT	320 g (Ø31.8 x 110)



STARGAZER

MATERIAL	3D FORGED
EXTENSION	90 / 110
BAR BORE	Ø31.8
STEERER	Ø28.6 / 31.8
ANGLE	35°
LENGTH	45 mm / 48.5 mm for E version
WEIGHT	256 g (L:110)



COBRA



MATERIAL	3D FORGED
EXTENSION	100
BAR BORE	Ø25.4 / Ø31.8
STEERER	Ø28.6
ANGLE	-40° ~ +80° / +50° ~ -50°
LENGTH	41 mm
WEIGHT	300 g (Ø25.4)



COMPACT II



MATERIAL	FORGED
EXTENSION	95 / 110
BAR BORE	Ø25.4 / 31.8 (25.4 W/Shim)
STEERER	Ø28.6
ANGLE	-20° ~ +60°
LENGTH	41 mm
WEIGHT	329 g (Ø31.8 x E:110)



EASY-UP LITE

MATERIAL	AL6061
BASE DIAMETER	Ø28.6
HEIGHT	110~180 mm / 110~210 mm
STEM ADJUSTER	70 / 100
WEIGHT	353 g (110~210 mm)



HLCORP. 信隆車料工業股份有限公司
18 Kuang Fu North Road Hsinchu Industrial Park Hu Ko Hsinchu Hsien, Taiwan.
TEL: 886-3-5983721 FAX: 886-3-5981861 E-mail: sales@satoribike.com



Scan for full catalog



SATORI-ET2



MATERIAL	3D FORGED
EXTENSION	90 / 110
BAR BORE	Ø25.4 / Ø31.8 (Ø25.4 mm with shim)
STEERER	Ø28.6
ANGLE	-12° / +12°
LENGTH	41 mm
WEIGHT	287 g (Ø31.8 x E:110)



MAMBA

MATERIAL	3D FORGED
EXTENSION	80 / 90 / 100 / 110 / 120 / 130
BAR BORE	Ø31.8
STEERER	Ø28.6
ANGLE	-7°
LENGTH	38 mm
WEIGHT	133 g (E:100)



STEALTH 6

MATERIAL	3D FORGED
EXTENSION	80 / 90 / 100 / 110
BAR BORE	Ø31.8
STEERER	Ø28.6
ANGLE	-7° / +7°
LENGTH	41 mm
WEIGHT	148 g (E:100)



SATORI-EZ3 (AHS)

SATORI-EZ3 (QUILL)

SATORI-EZ3 AHS

MATERIAL	FORGED
EXTENSION	110
BAR BORE	Ø25.4 / 31.8
STEERER	Ø28.6
ANGLE	0° ~ +80°
LENGTH	75 mm (Steerer clamp insert 41mm)
WEIGHT	509 g (Ø25.4)



SATORI-EZ3 QUILL

MATERIAL	FORGED
EXTENSION	110
BAR BORE	Ø25.4 / 31.8
STEERER	Ø25.4
ANGLE	0° ~ +80°
LENGTH	160 / 180 / 230 mm
WEIGHT	606 g (Ø25.4 x L:180)




HEADS-UP 4

MATERIAL	AL6061
BASE DIAMETER	28.6
HEIGHT	117
STEM ADJUSTER	10mm thick (1 spacer) 5mm thick (2 spacer) 8mm thick (1 spacer)
WEIGHT	217 g

HEADS-UP ET

MATERIAL	AL6061
BASE DIAMETER	28.6
HEIGHT	130 mm
STEM ADJUSTER	10mm thick (1 spacer) 5mm thick (2 spacer)
WEIGHT	282 g



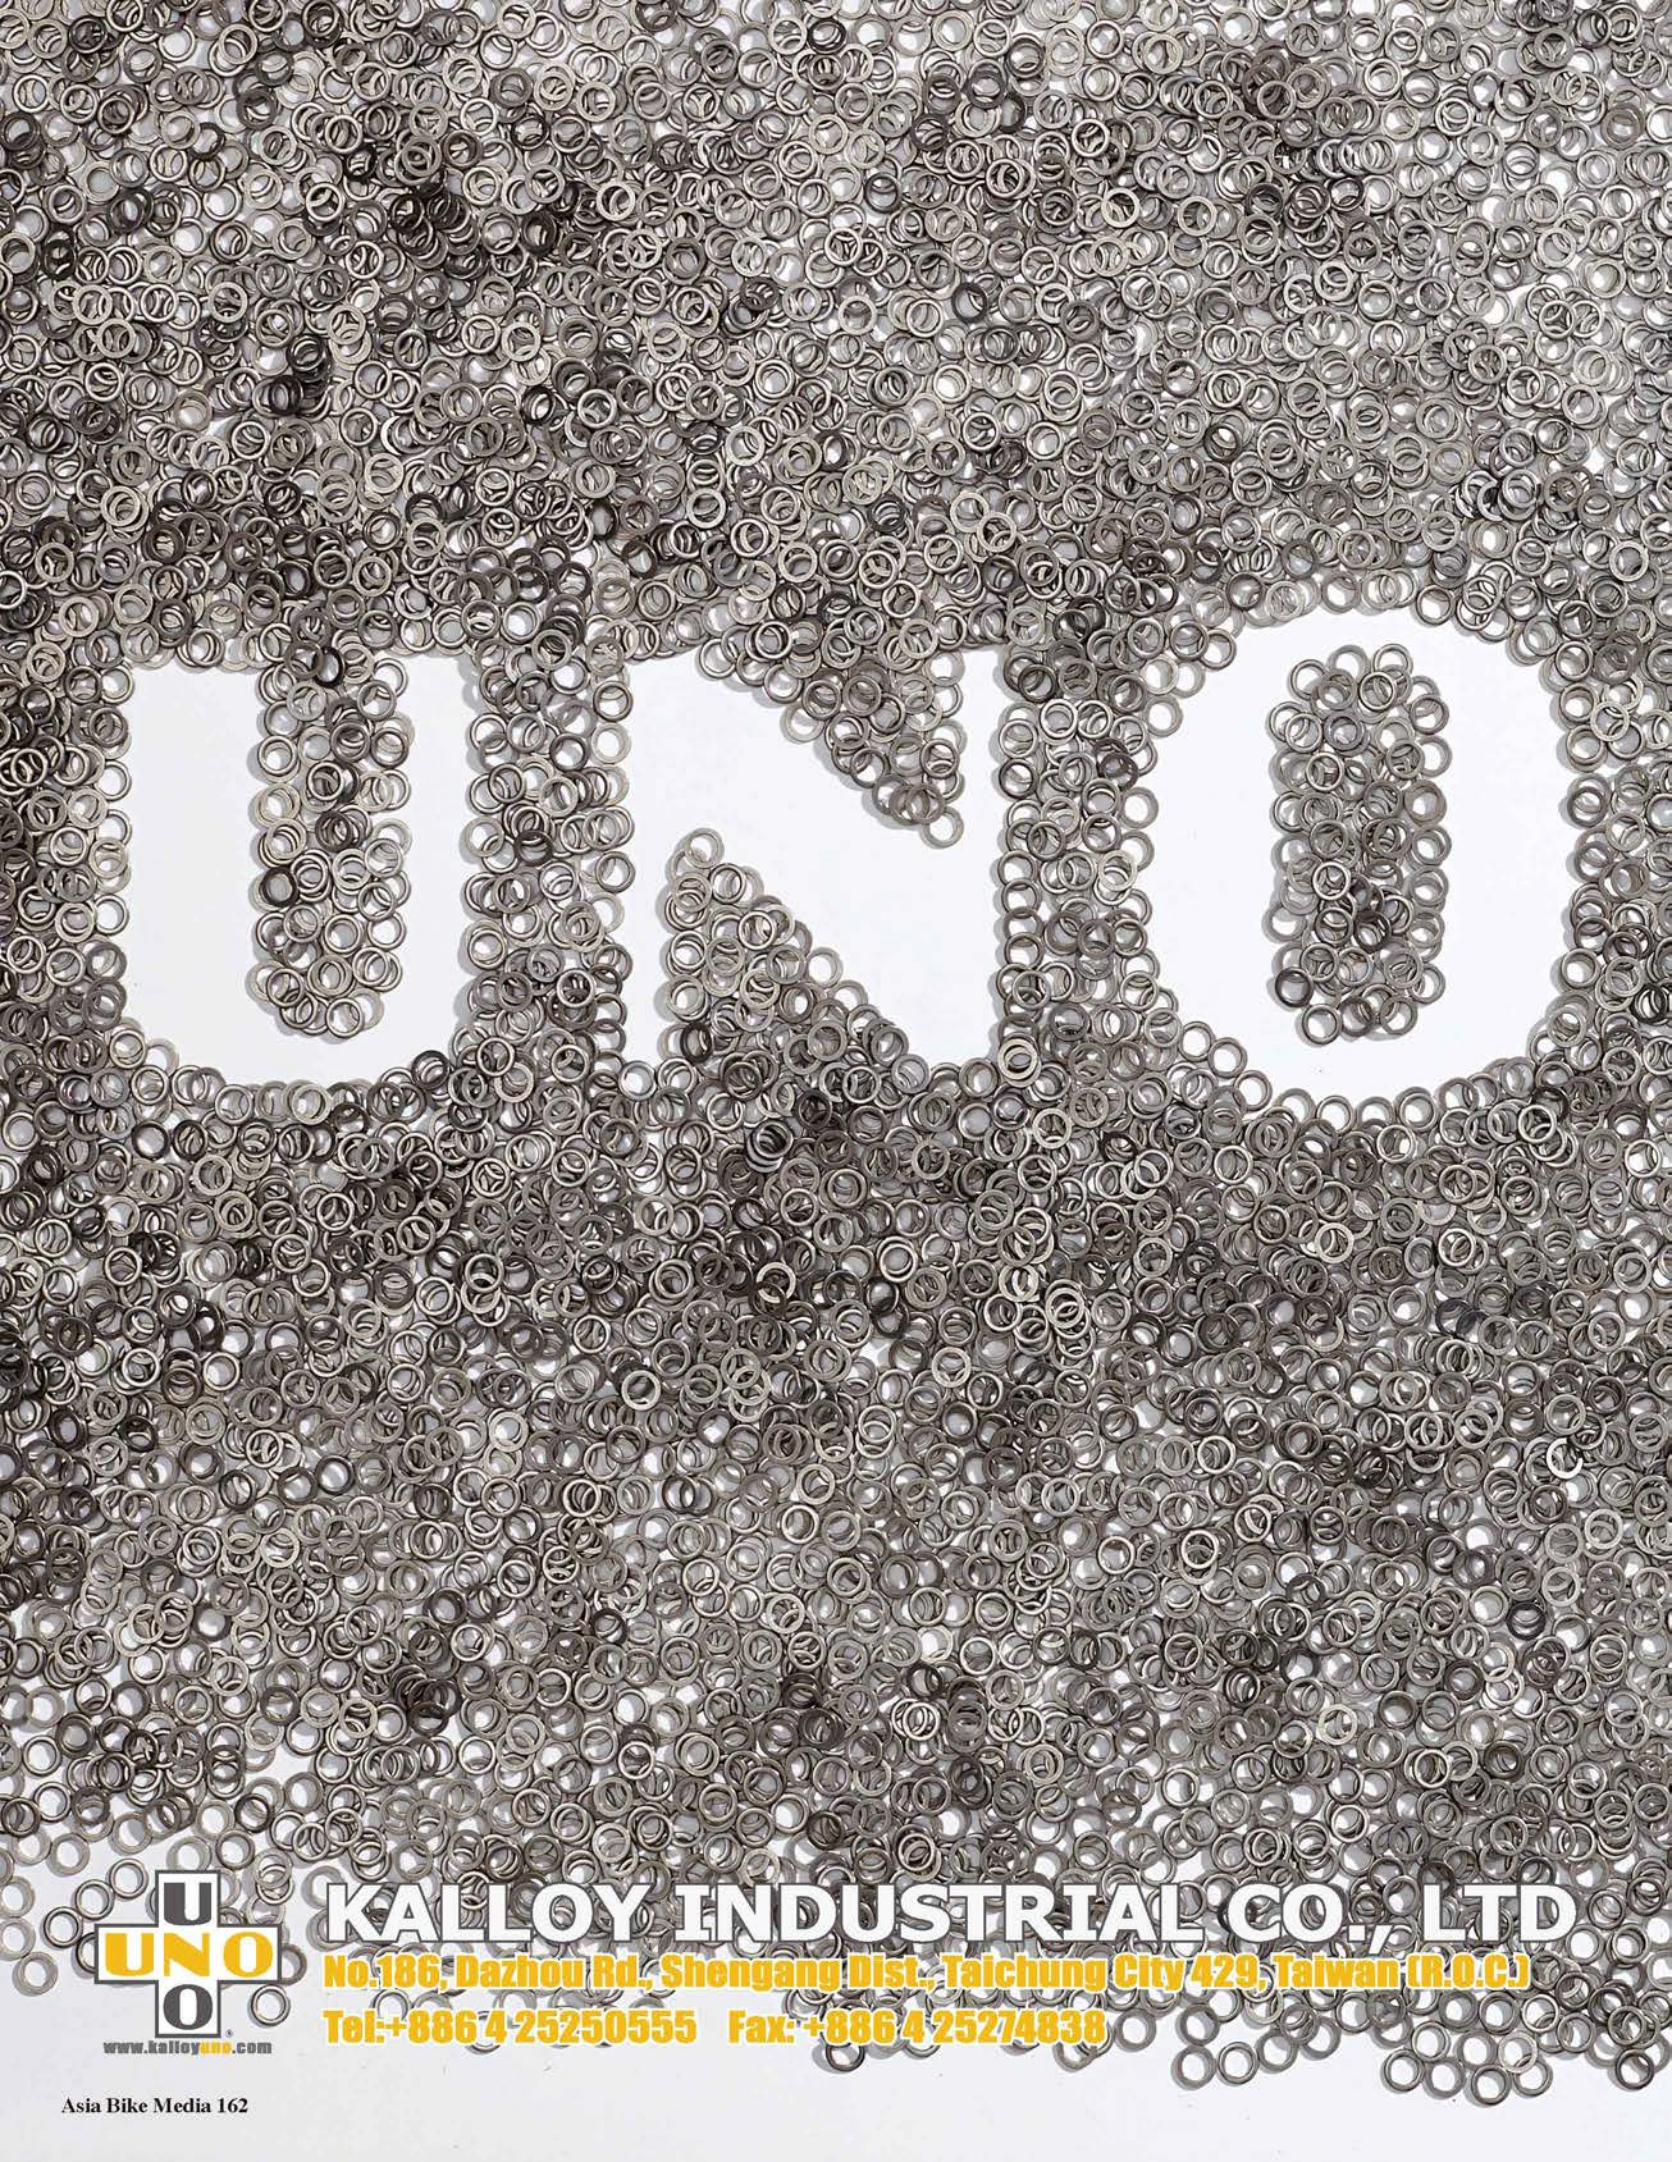

KALLOY INDUSTRIAL CO., LTD

No.186, Dazhou Rd., Shengang Dist., Taichung City 429, Taiwan (R.O.C)

Tel: +886 4 25250555 Fax: +886 4 25274838



ASA106

ISO 4210 - R/M approved
3D forged, 7050-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130/140/150mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 116g(L:100mm)



ASA105 ASA105N

ISO 4210 - R/M approved
3D forged, 7050-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(+/-7degree)
80/90/100/110/120/130mm(+/-17degree)
Angle: +/-7degree, +/-17degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 98g(ASA105 L:80mm)
100g(ASA105N L:80mm)



AS007N

ISO 4210 - R/M approved
3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(7degree x25.4/26.0mm)
60/70/80/90/100/110/120/130mm(7/17degree x31.8mm)
60/70/80/90/100/110mm(12degree x31.8mm)
Angle: 7/12/17degree
Diameter: 25.4/26.0/31.8mm
Steerer: 25.4/28.6mm
Height: 40mm
Weight: 134g(90mm x 7degree)



AS7AD

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: +/-8degree, +/-12degree, +/-16degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 44mm
Weight: 142g(L:90mm)
This stem includes one top cap and two bushings.
Provide Multi-positions for professional riding.



ASDC1

ISO 4210 - M approved
Die cast
Ext.: 60/75/90/105/120mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 42mm
Weight: 179g(L:75mm)



AS820

ISO 4210 - M approved
2D forged angle adjustable stem
Ext.: 90/110/130mm(25.4mm/26.0mm)
95/110/125mm(31.8mm)
Angle: 0~60degree
Diameter: 25.4/26.0/31.8mm
Steerer: 25.4(shim)/28.6mm
Height: 35mm
Weight: 265g(28.6mm x 95mm)

UNO



SP619

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 312g(31.6mmx350mm)

SP729

ISO 4210 - R/M approved
3D forged one-piece 7050-T6 shaft

SP719

ISO 4210 - R/M approved
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 277g(SP729 31.6mmx350mm)
286g(SP719 31.6mmx350mm)

SP3D1

ISO 4210 - R/M approved
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 17mm
Weight: 349g(31.6mmx350mm)



SPDC1

ISO 4210 - R/M approved
Die cast clamps, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 5mm
Weight: 332g(31.6mmx350mm)



KALLOY INDUSTRIAL CO., LTD

No.186, Dazhou Rd., Shengang Dist., Taichung City 429, Taiwan

Tel: +886 4 25250555 Fax: +886 4 25274838

Flare series



HBL101

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 300g(420mm)



HBL001

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 370g(420mm)

HBL102

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 315g(420mm)



HBL002

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 78mm

Width: 400/420/440/460mm

Ramp angle: 20degree

Flare angle: 6/12degree

Weight: 430g(420mm)

HBL103

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 78mm

Width: 400/420/440/460mm

Ramp angle: 20degree

Flare angle: 6/12degree

Weight: 315g(420mm)



MODEL NOTE

DA-5xx: #7075 Alloy
DA-7xx: #2014 Alloy
DA-2xx: #6061 Alloy

Finish: 3K Carbon Fiber Wrapped

	GF	FCF	HCF	OCF
Front Cap	•	•	•	•
Body	•	•	•	•
Rear Cap	•	•	•	•

DA-231



3D forged AL6061, 4-bolt ahead stem
Wide oversize Bar bore with Carbon friendly design

Extension: 40 / 50 / 60 / 70mm
Rise: 0°
Bar bore: Ø35mm
Clamp I.D.: Ø28.6mm
Stack height: 4mm
Weight: 170g, Ø35 x 60mm ext.
Finish: High Polish / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-241

3D forged AL6061, 4-bolt ahead stem

Extension: Ø: 40 / 50 / 60mm
6°: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: 0° / ±6°
Bar bore: Ø35mm
Clamp I.D.: Ø28.6mm
Stack height: 37mm
Weight: 144g, Ø35 x 100mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-269 (ISO 4210)



3D forged AL6061, 4-bolt ahead stem

Extension: 40 / 50 / 60 / 70 / 80 / 90 / 100mm
Rise: 0°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 40mm
Weight: 155g, Ø31.8 x 90mm ext.
Finish: High Polish Black Anodized
Packing: 50~70: 50pcs / ctn / 1.16cuft
80~100: 50pcs / ctn / 1.43cuft
Produced in: Taiwan



DA-282/DA-283/DA-285 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 50 / 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±7°
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: DA-282: 148g, Ø31.8 x 90mm ext.
DA-283: 151.1g, Ø31.8 x 90mm ext.
DA-285: 152.5g, Ø31.8 x 90mm ext.
Finish: Black / Silver / Anodized / S.B. Color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-283

DA-285

DA-205

3D forged AL6061, 4-bolt ahead stem

Extension: 6°: 35 / 45 / 60 / 70 / 80 / 90 / 100 / 110 / 120mm
17°: 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6° / ±17°
Bar bore: Ø31.8mm
Clamp I.D.: 6°: Ø25.4 / Ø28.6mm
17°: Ø28.6mm
Stack Height: 6°: 37mm; 17°: 40mm
Weight: 6°: 125g, Ø31.8 x 90mm ext.
17°: 129.5g, Ø31.8 x 90mm ext.
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



6°



17°



DA-274 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6°
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 37mm
Weight: 137g, Ø31.8 x 100mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-296 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6°
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 37mm
Weight: 137g, Ø31.8 x 100mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-250 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 37mm
Weight: 114.1g, Ø31.8 x 90mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-236

AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 37mm
Weight: 119.6g, Ø31.8 x 70mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



DA-249 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 80 / 90 / 100 / 110mm
Rise: 0°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 39.5mm
Weight: 142g, Ø31.8 x 80mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-228

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 100mm
Rise: 0°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 39.5mm
Weight: 142g, Ø31.8 x 60mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



DA-230

3D forged AL6061, 4-bolt ahead stem
Face plate with light mount

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±6°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 37mm
Weight: 143g, Ø31.8 x 100mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



DA-254



DA-270

DA-254/DA-270 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±8°
Bar bore: Ø31.8mm
Clamp I.D.: DA-254: Ø25.4 / Ø28.6mm
DA-270: Ø28.6mm
Stack height: 36mm
Weight: DA-254CF: 155.8g; Ø31.8 x 110mm ext.
DA-270: 240g; Ø31.8 x 90mm ext.
Finish: DA-254: Black / Silver / Anodized / S.B. color
DA-254CF: Carbon Fiber 3K Weave
DA-270: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: DA-254 / 254CF: Taiwan
DA-270: China

DA-277 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 7°: 60 / 80 / 90 / 100 / 110mm
12°: 90 / 100 / 110mm
17°: 80 / 110mm
7° / 12° / 17°
Rise: ±8°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6 / Ø38.2 / Ø39.7mm
Stack height: 50.8mm
Weight: 183.5g; Ø31.8 x 90mm ext.
(Clamp I.D. 38.2mm)
Finish: Black / Silver / Anodized / S.B. Color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan

DA-32 (ISO 4210)

3D forged AL6061, 4-bolt ahead stem

Extension: 60 / 70 / 80 / 90 / 100 / 110 / 120 / 130mm
Rise: ±10°
Bar bore: Ø25.4 / Ø31.8mm
Clamp I.D.: Ø28.6 / Ø25.4mm
Stack height: 40mm
Weight: 173g; Ø31.8 x 110mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan

MA-50

Material: Alloy
Extension: Ø25.4: 40mm
Ø31.8: 40 / 60 / 80mm
Rise: 10°
Bar bore: Ø31.8mm / Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 45mm
Weight: 238g; Ø31.8 x 60mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-410/MA-411

Alloy + AL6061 cold forged cap

Extension: 75 / 90 / 105
Rise: ±8°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6 / Ø25.4mm
Stack height: 40mm
Weight: 139g; Ø31.8 x 90mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-409

Alloy + AL6061 cold forged cap

Extension: 75 / 90 / 105
Rise: ±8°
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6 / Ø25.4mm
Stack height: 40mm
Weight: 147g; Ø31.8 x 90mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



MA-47



MA-471



MA-400



MA-402

MA-408

Alloy + AL6061 cold forged cap

Extension: 60
Rise: ±20°
Bar bore: Ø25.4mm
Clamp I.D.: Ø28.6 / Ø25.4mm
Stack height: 40mm
Weight: 88.5g; Ø25.4 x 60mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-47/MA-471

Material: Alloy
Extension: 90 / 110 / 130mm
Rise: 10°
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-47: 319g; Ø31.8 x 110mm ext.
MA-471: 240.8g; Ø31.8 x 90mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-45

Material: Alloy
Rise/Extension: 10°: 60 / 75 / 90 / 110mm
20°: 70 / 80 / 100 / 120mm
40°: 90 / 110mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: 207g; Ø25.4 x 110mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-400/MA-402

Material: Aluminum Alloy
Extension: 60 / 80 / 90 / 100mm
Rise: 8°
Bar bore: Ø25.4 / Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 37mm
Weight: MA-400: 206g; Ø31.8 x 90mm ext.
MA-402: 192.6g; Ø31.8 x 90mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

MA-553E (ISO 4210 C)

MA-553 features a robust side tightening mechanism to ensure the rigid state of the stem when locked in place. Its quick-release function also allows the users to adjust the angles tool-free.

Forged aluminum alloy body with reinforcement nylon GR
Also available with Aluminum quick release: MA-553

Angle: 90°~160°
Extension: 100mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: 477g; Ø25.4 x 100mm ext.
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.8cuft
Produced in: Taiwan

SPACER WASHER



AW-8



AW-8

Material: Aluminum alloy
I.D.: Ø29mm
O.D.: Ø36.3mm
Height: 3 / 5 / 10 / 15mm
Finish: Anodized
Produced in: Taiwan

AW-99

Material: Carbon
I.D.: Ø28.8mm
O.D.: Ø34mm
Height: 3 / 5 / 8 / 10 / 15mm
Produced in: Taiwan



MA-579 (ISO 4210 C)

Tool-free adjustable ahead stem



Material: Alloy
Angle: 90°~160°
Extension: 110mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: 450g; Ø28.6 x 110mm
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.68cuft
Produced in: Taiwan



MA-593



MA-577

MA-593 (S)/MA-577 (S) (ISO 4210 C)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride

Material: Forged AL6061 (adjustable ahead stem)
Angle: 40°~140°
Extension: MA-593 / MA-577: 128mm
MA-593S / MA-577S: 108mm
Bar bore: MA-593(S): Ø31.8mm
MA-577(S): Ø25.4 / Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 39mm
Weight: MA-593: 259g; Ø25.4 x 128mm ext.
MA-577: 259g; Ø31.8 x 128mm ext.
Finish: Black / Silver / Anodized / S.B. Color
Packing: 50pcs / ctn / 1.06cuft
Produced in: Taiwan

MA-573 (ISO 4210 C)

Alloy body with reinforcement nylon GR



Material: Alloy
Angle: 90°~160°
Extension: 110mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: 505g; Ø25.4 x 110mm ext.
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.68cuft
Produced in: Taiwan



MA-598S (ISO 4210 C)

Material: Forged AL6061 (adjustable ahead stem)
Angle: 40°~140°
Extension: 108mm
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: 320g; Ø25.4 x 108mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan

MA-595 (S) (ISO 4210 C) MA-589 (S) (ISO 4210 C)

Unique no side-play adjustment mechanism design to secure a stiffer and safer ride



MA-595



MA-589

Material: Forged AL6061 (adjustable ahead stem)
Angle: 40°~140°
Extension: MA-595 / MA-589: 110mm
MA-595S / MA-589S: 90mm
Bar bore: MA-595(S): Ø31.8mm
MA-589(S): Ø25.4 / Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-595: 283g; Ø25.4 x 110mm ext.
MA-589: 283g; Ø31.8 x 110mm ext.
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



MA-570 (S) (ISO 4210 C)

New angle adjust mechanism designed
New side-play locking device

Material: Alloy
Angle: 35°~145°
Extension: MA-570: 128mm
MA-570S: 108mm
Bar bore: Ø31.8mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-570S: 355g; Ø31.8 x 108mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan

MA-596

Material: Alloy
Angle: 40°~140°
Extension: 85 / 105mm
Bar bore: Ø31.8mm
Clamp I.D.: Ø28.6mm
Stack height: 49mm
Weight: 403g; Ø31.8 x 90mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



MA-522



MA-521

MA-521 (S)/MA-522(S)

Material: MA-521(S): Alloy
MA-522(S): Alloy + AL6061 cold forged cap
Angle: 35°~145°
Extension: MA-521 / MA522: 128mm
MA-521S / MA522S: 108mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-521: 308g; Ø25.4 x 128mm ext.
MA-522: 304g; Ø25.4 x 128mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan

MA-592

Material: Alloy
Angle: 35°~145°
Extension: 85 / 105mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø28.6mm
Stack height: 49mm
Weight: 332.8g; Ø25.4 x 85mm ext.
349g; Ø25.4 x 105mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



MA-536 (S) (ISO 4210 C)

Material: Alloy
Angle: 85°~145°
Extension: MA-536: 128mm
MA-536S: 108mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-536: 480g; Ø25.4 x 128mm ext.
MA-536S: 427g; Ø25.4 x 108mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan / China



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX

MA-535 (S)/MA-525 (S) (ISO 4210 C)



Material: Alloy
Angle: 85°~145°
Extension: MA-535 / MA-525: 128mm
MA-535S / MA-525S: 108mm
Bar bore: Ø25.4mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 40mm
Weight: MA-535: 431g; Ø25.4 x 128mm ext.
MA-525: 442g; Ø25.4 x 128mm ext.
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan / China

MQ-570 (S) (ISO 4210 C)

New angle adjust mechanism designed
New side-play locking device



Material: Alloy
Angle: 90°~155°
Extension: MQ-570: 105mm
MQ-570S: 85mm
Bar bore: Ø31.8mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: MQ-570: 475g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan

MQ-553E (PATENTED) (ISO 4210 C)

Aluminum alloy with TPR quick release
Also available with Aluminum quick release: MQ-553



Angle: 90°~160°
Extension: 110mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180 / 230mm
Weight: MQ-553E: 642g; Ø25.4 x 180mm Quill
MQ-553: 632g; Ø25.4 x 180mm Quill
Finish: Black / Silver / Anodized / S.B. color
Packing: 25pcs / ctn / 0.87cuft
Produced in: Taiwan



MQ-521 (S)/MQ-522(S)

Material: MQ-521(S): Alloy
MQ-522(S): Alloy + AL6061 cold forged cap
Angle: 90°~155°
Extension: MQ-521 / MQ-522: 105mm
MQ-521S / MQ-522S: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: MQ-521: 398g; Ø25.4 x 180mm Quill (ext.: 105mm)
MQ-522: 394g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan

MQ-579 (ISO 4210 C)

Tool-free adjustable quill stem



Material: Alloy
Angle: 90°~160°
Extension: 110mm
Bar bore: Ø25.4mm
Quill Dia: Ø25.4mm
Quill length: 180mm
Weight: 580g; Ø25.4 x 180mm Quill
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.79cuft
Produced in: Taiwan

MQ-565 (S) (ISO 4210 C)

New angle adjust mechanism designed
New side-play locking device



Material: Alloy
Angle: 90°~155°
Extension: MQ-565: 105mm
MQ-565S: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: MQ-565: 456.2g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan / China

MQ-573 (ISO 4210 C)

Alloy body with reinforcement nylon QR



Angle: 90°~160°
Extension: 110mm
Bar bore: Ø25.4mm
Quill Dia: Ø25.4mm
Quill length: 180mm
Weight: 698g; Ø25.4 x 180mm Quill
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.87cuft
Produced in: Taiwan



MQ-517(S)CST

Material: Alloy body+ AL6061 forged cap+ Stainless quill
Angle: 90°~155°
Extension: MQ-517CST: 85mm
MQ-517CST: 105mm
Bar bore: Ø31.8mm
Quill Dia: Ø25.4mm
Quill length: 150 / 180 / 210 / 230 / 250 / 300mm
Weight: 668g; Ø31.8 x 105mm ext. (Quill: 300mm)
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan

MQ-593 (S) (ISO 4210 C)

MQ-577 (S) (ISO 4210 C)

New design adjust mechanism ensuring on side play



Material: Forged AL6061
Angle: 90°~140°
Extension: MA-593 / MA-577: 110mm
MA-593S / MA-577S: 90mm
MQ-593(S): Ø31.8mm
MQ-577(S): Ø25.4 / Ø31.8mm
Bar bore: Ø25.4mm
Quill Dia: 150 / 180 / 230mm
Quill length: MQ-577: 435g; Ø25.4 x 180mm Quill (ext.: 110mm)
Finish: Black / Silver / Anodized / S.B. color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan



MQ-522(S)CST

Material: Alloy body+ AL6061 forged cap+ Stainless quill
Angle: 90°~155°
Extension: MQ-522CST: 85mm
MQ-522CST: 105mm
Bar bore: Ø25.4mm
Quill Dia: Ø25.4mm
Quill length: 150 / 180 / 210 / 230 / 250 / 300mm
Weight: 660g; Ø25.4 x 105mm ext. (Quill: 300mm)
Finish: Black / Silver / Powder coated color
Packing: 30pcs / ctn / 0.87cuft
Produced in: Taiwan



MQ-580 (S) ISO 4210 C1

Material: Alloy
Angle: 95°~145°
Extension: MQ-580: 105mm
MQ-580S: 90mm
Bar bore: Ø25.4mm
Quill Dia: Ø25.4mm
Quill length: 180mm
Weight: MQ-580: 470g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.87cuft
Produced in: Taiwan



MQ-514CST-5

Material: Alloy
Extension: 80mm
Bar bore: Ø25.4mm
Quill Dia: Ø25.4mm
Quill length: 150 / 180 / 210 / 250 / 300mm
Weight: 603g; Ø25.4 x 300mm
Finish: Black / Silver / Powder coated color
Produced in: Taiwan



MQ-558 (S) ISO 4210 C1

Material: Alloy
Angle: 95°~145°
Extension: MQ-558: 105mm
MQ-558S: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 150 / 180 / 210mm (Ø22.2 only)
Weight: MQ-558: 508g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.87cuft
Produced in: MQ-558: China MQ-558S: Taiwan



MQ-422

Material: Alloy
Extension: 80mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: 464g; Ø25.4 x 180mm
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.66cuft
Produced in: China



MQ-536 (S) ISO 4210 C1

Material: Alloy
Angle: 95°~145°
Extension: MQ-536: 105mm
MQ-536S: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 150 / 180 / 210mm (Ø22.2 only)
Weight: MQ-536: 616g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.85cuft
Produced in: Taiwan



MQ-419

Material: Alloy
Extension: 60 / 80 / 100mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: 378g; Ø22.2 x 180mm
422g; Ø25.4 x 180mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 1.16cuft
Produced in: Ext.: 80mm: Taiwan
Ext.: 60 / 100mm: China



MQ-527 (S)/MQ-525 (S)

Material: Alloy
Angle: 95°~145°
Extension: MQ-527 / MQ-525: 105mm
MQ-527S / MQ-525S: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 150 / 180 / 210mm (Ø22.2 only)
Weight: MQ-527: 538g; Ø25.4 x 180mm Quill (ext.: 105mm)
MQ-525: 568g; Ø25.4 x 180mm Quill (ext.: 105mm)
Finish: Black / Silver / Powder coated color
Packing: 25pcs / ctn / 0.87cuft
Produced in: Taiwan / China



MQ-46

Material: Alloy
Extension: 85 / 105mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2 / Ø25.4mm
Quill length: 150 / 180mm
Weight: 353g; Ø22.2 x 150mm Quill (ext.: 85mm)
422g; Ø25.4 x 180mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



RQ-412/RQ-418

Quill Stem for Road Bike

Material: Alloy
Angle: -17°
Extension: RQ-412: 105mm
RQ-418: 80mm
Bar bore: Ø25.4mm
Quill Dia: Ø22.2mm
Quill length: RQ-412: 180mm / RQ-418: 150mm
Weight: RQ-412: 392g / RQ-418: 351g
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



MQ-41

For Beach Cruiser

Material: Alloy
Extension: 85mm
Bar bore: Ø25.4mm
Quill Dia: Ø21.1 / Ø22.2 / Ø25.4mm
Quill length: 180mm
Weight: 374g; Ø21.1 x 180mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



MQ-417

Material: Alloy
Extension: 80mm
Bar bore: Ø25.4mm
Quill Dia.: Ø22.2 / Ø25.4mm
Quill length: 175mm
Weight: 366g, Ø22.2 x 175mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 1.16cuft
Produced in: Taiwan / China



BA-75

PROMAX

Material: Forged AL6061
Extension: 52mm
Bar bore: Ø22.2mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 30.5mm
Weight: 275g
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



FB-313

Material: Alloy
Extension: 0mm
Rise: +6°
Bar bore: Ø25.4mm
Quill Dia.: Ø22.2 / Ø25.4mm
Quill length: 355mm
Weight: 895.4g
Finish: Black / Silver
Packing: 25pcs / ctn / 2.46cuft
Produced in: China



BA-73

PROMAX

Material: Forged AL6061
Extension: 50mm
Bar bore: Ø22.2mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 30.5mm
Weight: 270g
Finish: Black / Silver / Anodized / S.B. color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



FB-314

Material: Alloy
Extension: 0mm
Rise: +6°
Bar bore: Ø25.4mm
Quill Dia.: Ø22.2 / Ø25.4mm
Quill length: 355mm
Weight: 838g
Finish: Black / Silver
Packing: 25pcs / ctn / 2.46cuft
Produced in: China



BA-89

BA-89 (S)

PROMAX

Material: Forged AL6061
Extension: BA-89: 45mm
BA-89S: 40mm
Bar bore: Ø22.2mm
Clamp I.D.: Ø25.4mm
Stack height: 26mm
Weight: BA-89: 144g, 45mm
BA-89S: 134g, 40mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: Taiwan



FB-306

Material: Alloy
Extension: 0mm
Bar bore: Ø25.4mm
Quill Dia.: Ø27.2 / 28.6mm
Quill length: 210 / 215 / 220 / 250 / 270 / 320mm
Finish: Black / Silver
Produced in: China



BA-72

Material: Alloy
Extension: 55mm
Bar bore: Ø22.2mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 30.5mm
Weight: 519g, Ø22.2 x 55mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China

FB-309

Material: Alloy
Angle: 12°
Quill Dia.: Ø22.2 / 25.4mm
Quill length: 330mm
Finish: Black / Silver
Produced in: China



BA-90D

Material: Alloy
Extension: 50mm
Bar bore: Ø22.2mm
Clamp I.D.: Ø25.4 / Ø28.6mm
Stack height: 30mm
Weight: 367g, Ø22.2 x 50mm
Finish: Black / Silver / Powder coated color
Packing: 50pcs / ctn / 0.87cuft
Produced in: China



LEADTEC CO., LTD.

27, Fukon Rd., Fushing Ind. Zone, Changhua County, 506, Taiwan

TEL:+886-4-7691125

FAX:+886-4-7697206

leadtec-sales@umail.hinet.net



LCS-7767

AM/TRAIL

Material	Alloy 6061 T6
Process	CNC machined
Extension	40 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	136g (31.8mm)



LCS-7762

AM/TRAIL

Material	Alloy 6061 T6
Process	CNC machined
Extension	45/60 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	147g (31.8*45 mm)



LCS-7747

AM/TRAIL

Material	Alloy 6061 T6
Process	CNC machined
Extension	50 mm
Steerer	28.6 mm
Barbore	31.8 mm (W/SIM 35.0 mm)
Angle	0°
Height	40 mm
Weight	154g



LCS-7918

DH

Material	Alloy 6061 T6
Process	CNC machined
Extension	45/50 mm
Barbore	35.0 / 31.8 mm
Angle	10°
Weight	139g

LCS-7735

DH

Material	Alloy 6061 T6
Process	CNC machined
Extension	25/30 mm
Barbore	35.0 / 31.8 mm
Angle	10°
Weight	131g



LCS-7906

DH

Material	Alloy 6061 T6
Process	CNC machined
Extension	45/50 mm
Barbore	31.8 mm
Angle	15°
Weight	132g



LCS-7934

END/AM

Material	Alloy 6061 T6
Process	CNC machined
Extension	45/60 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	145g (35.0*45 mm)



LCS-7940

AM/TRAIL

Material	Alloy 6061 T6
Process	CNC machined
Extension	35/45 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	115g (35.0*35 mm)

LCS-7915

AM/TRAIL

Material	Alloy 6061 T6
Process	CNC machined
Extension	35/45/55 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	35 mm
Weight	133g (35.0*35 mm)



LCS-7921

AM/TRAIL/XC

Material	Alloy 6061 T6
Process	CNC machined
Extension	50/60/70/80/90/100 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	±5°
Height	40 mm
Weight	115g (35.0*35 mm)



LCS-7717

AM/TRAIL

Material	Alloy 6061 T6
Process	Forged
Extension	35 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	119g



LCS-7718

AM/TRAIL

Material	Alloy 6061 T6
Process	Forged
Extension	35 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	0°
Height	40 mm
Weight	119g



LCS-7195

AM/TRAIL

Material	Alloy 6061 T6
Process	3D Forged
Extension	40/50/60/70/80 mm
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	5°
Height	40 mm
Weight	115g (31.8*40 mm)



LCS-7156

ROAD

Material	Alloy 6061 T6
Process	3D Forged
Extension	80/90/100/120/130 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	-6°
Height	40 mm
Weight	119g (90 mm)



LCS-7740

AM/TRAIL

Material	Alloy 6061 T6
Process	3D Forged
Extension	40/60 mm
Steerer	28.6 mm
Barbore	LCS-7740
Angle	0°
Height	40 mm
Weight	128g (35.0*45 mm)





LEADTEC CO., LTD.

27, Fukon Rd., Fushing Ind. Zone, Changhua County, 506, Taiwan

TEL:+886-4-7691125

FAX:+886-4-7697206

leadtec-sales@umail.hinet.net

LCS-7190

AM/TRAIL/XC/ROAD

Material	Alloy 6061 T6
Process	3D Forged
Extension	LCS-7190 40/50/60/70/80/90/100/110/120 mm (31.8 mm 7°)
	50/60/70/80/90 mm(35 mm 7°)
	50/60/70/80/90/100 mm(31.8 mm, 17°)
Steerer	28.6 mm
Barbore	35.0 / 31.8 mm
Angle	±7° / ±17°
Height	40 mm
Weight	118g (31.8*90 mm)



LCS-7187

AM/TRAIL/XC

Material	Alloy 6061 T6
Process	3D Forged
Extension	60/70/80/90/100/110/120 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	±6°
Height	40 mm
Weight	131g (Ext.90 mm)



LCS-7081

AM/TRAIL/XC

Material	Alloy 6061 T6
Process	3D Forged
Extension	50/60/70/80/90/100/110/120 mm
Steerer	28.6 mm
Barbore	31.8 / 25.4 mm
Angle	±7°
Height	40 mm
Weight	146g (Ext.90 mm)



LCS-7091

AM/TRAIL/XC

Material	Alloy 6061 T6
Process	3D Forged
Extension	50/60/70/80/90/100/110 mm (25.4 7°)
	80/90/100/110 mm (25.4 17°)
Steerer	28.6 mm
Barbore	25.4 mm
Angle	±7° / ±17°
Height	80-110 mm
Weight	102g (Ext.80 mm)

LCS-7769

AM

Material	Alloy 6061 T6
Process	Forged
Extension	40 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	0°
Height	35 mm
Weight	145g



LCS-7727

FR/END/DJ

Material	Alloy 6061 T6
Process	Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	0°
Height	35 mm
Weight	223g



LCS-7140

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged / Forged Cap
Extension	45 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	10°
Height	40 mm



LCS-7116

JUNIOR/KIDS

Material	Alloy 356.2
Process	Melt Forged / Forged cap
Extension	50 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	10°
Height	40 mm



LCS-7126

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged / Forged Cap
Extension	50 mm(S:25.4mm & B:25.4mm)
	50/70/90/110 mm(S:28.6mm)
Steerer	25.4 / 28.6 mm
Barbore	25.4 / 31.8 mm
Angle	10°
Height	40 mm

LCS-7130

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged / Forged Cap
Extension	50 mm(S:25.4mm & B:25.4mm)
	50/70/90/110 mm(S:28.6mm)
Steerer	25.4 / 28.6 mm
Barbore	25.4 / 31.8 mm
Angle	10°
Height	40 mm



LCS-7121

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged / Forged Cap
Extension	50 mm(S:25.4mm)
	50/70/90/110 mm(S:28.6mm)
Steerer	25.4 / 28.6 mm
Barbore	25.4 mm
Angle	10°
Height	40 mm



LCS-7138

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged
Extension	60 mm
Steerer	28.6 mm
Barbore	25.4 mm
Angle	10°
Height	40 mm



LCS-7713

SPORT MTB

Material	Alloy 356.2
Process	Melt Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	10°
Height	45 mm



LCS-7261

FREESTYLE/RACE

Material	Alloy 6061 T6
Process	Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7945

FREESTYLE/RACE

Material	Alloy 6061 T6
Process	CNC Machined
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



HANDLEBAR STEMS



LEADTEC CO., LTD.

27, Fukon Rd., Fushing Ind. Zone, Changhua County, 506, Taiwan

TEL: +886-4-7691125

FAX: +886-4-7697206

leadtec-sales@umail.hinet.net



LCS-7978
FREESTYLE/RACE

Material	Alloy 6061 T6
Process	CNC Machined
Extension	50/54/58 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7234
FREESTYLE/RACE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	40 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7232
FREESTYLE/RACE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7237
FREESTYLE/RACE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7236
FREESTYLE/RACE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7238
FREESTYLE/RACE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7245
FREESTYLE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7247
FREESTYLE

Material	Alloy
Process	Melt Forged / Forged Cap
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7063
FREESTYLE

Material	Alloy
Process	Melt Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7059
FREESTYLE

Material	Alloy
Process	Melt Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7065
FREESTYLE

Material	Alloy
Process	Melt Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7066
FREESTYLE

Material	Alloy
Process	Melt Forged
Extension	50 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7008
FREESTYLE/RACE

Material	Alloy 6061 T6
Process	Extrusion W / CNC
Extension	48/55 mm
Steerer	28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7241
RACE / KIDS

Material	Alloy 6061 T6
Process	Extrusion W / CNC
Extension	30 mm
Steerer	25.4 / 28.6 mm
Barbore	22.2 mm
Angle	0°
Height	30 mm



LCS-7211
JUNIOR/KIDS

Material	Alloy 6061 T6
Process	Melt Forged / Forged Cap
Extension	30 mm
Steerer	25.4 / 28.6 mm
Barbore	25.4 mm
Angle	0°
Height	40 mm



LCS-7190
JUNIOR/KIDS

Material	Alloy 6061 T6
Process	3D Forged
Extension	40 mm
Steerer	28.6 mm
Barbore	31.8 mm
Angle	±7°
Height	40 mm



byschulz

INNOVATIVE BIKE COMPONENTS



G.2 PARALLEL SUSPENSION SEATPOST

Parallelogram suspension seatpost

- Very high riding comfort
- Supports up to 150 Kg rider-weight
- Travel: 30mm / 50mm LT
- High-performance plain polymer bearings (IGUS)
- Simple spring or saddle change
- Length G.2 : 350/400/450mm
- Length G.2 LT : 380/480/670mm



SDS Stem Docking System



Stem SDS



Stem Pro SDS



Stem Twist SDS



Stem Twist Pro SDS



speedlifter



Classic



Twist



Twist Pro SDS

Tool-free handlebar height adjustment, twisting, and angle-adjustable stems with SDS, for 1 1/8" and 1 1/4" A-Head-Systems

HANDLEBAR STEMS

www.byschulz.com

陸聯國際股份有限公司

LINUS CYCLE WORK INC.

7f-9, No. 262, Sec. 2, Ho Nan Rd.
Taichung City 40744
Taiwan

OEM AGENT ASIA

Phone : +886 (4) 245 299 09
Fax : +886 (4) 245 241 71
sales@linus.com.tw



OEM, DISTRIBUTOR & AFTERMARKET EUROPE

by.schulz GmbH

Vorstadtstraße 53
66117 Saarbrücken
Germany

Central Office

Phone : +49 (0) 681 59 59 81 18
Fax : +49 (0) 681 59 59 81 19
info@byschulz.com

STEM

Technology and Creation Always IN-TEK CORP.



ITC-TDOK5

3D forged
28.6 x 30/40/50/60mm
Bar Bore: 35.0mm
Angle: 6°



ITC-XC40K

Alloy with full CNC
28.6 x 35mm
Bar bore: 35mm
Angle: 36°



ITC-XC48K

Alloy with full CNC
28.6 x 60mm
Bar bore: 35mm
Angle: 36°



ITC-XC17K

Extrusion with full CNC
Bar Bore: 31.8/35.0mm



ITC-XEM704W

Melt-Forged/Forged cap
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XEM708W

Melt-Forged/Forged cap
28.6 x 40mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XEF336

2D Forged W/ Full CNC
25.4 x 35mm
Bar Bore: 22.2mm
Angle: 0°



ITC-XFF375

2D Forged
28.6 x 30mm
Bar Bore: 25.4mm
Angle: 7°



ITC-XD975W

Melt-Forged/Forged Cap
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XB556Q

Forged with partial CNC
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XB875

Melt-Forged/Forged Cap
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XC825Q

Melt-Forged/Forged Cap
28.6 x 40mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XB437

Forged with partial CNC
28.6 x 40/45/50/53mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-7053

Forged with partial CNC
28.6 x 40/45/50/53mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-7059C

Extrusion with full CNC
28.6 x 50/53mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-7064A

Melt-Forged/Forged Cap
28.6 x 40mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-7068A

Melt-Forged/Forged Cap
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XC476

Forged with Partial CNC
28.6 x 52mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 33mm



ITC-TE1F053

2D Forged
35.0 x 36mm
Bar Bore: 35.0mm
Angle: 7°



ITC-7320

Melt-Forged/Forged Cap
28.6 x 40mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 35mm



ITC-XB976

Melt-Forged/Forged Cap
28.6 x 50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-7242

Forged with partial CNC
28.6 x 30/40/50mm
Bar Bore: 22.2mm
Angle: 0°
Stack Height: 30mm



ITC-XC468

Forged with partial CNC
28.6 x 50mm
Bar Bore: 22.2/25.4mm
Angle: 0°
Stack Height: 33mm



ITC-7707

Forged with partial CNC
28.6 x 40mm
Bar Bore: 25.4/31.8mm
Angle: 0°
Stack Height: 38mm



ITC-TB37

3D Forged
28.6 x 90/100/110mm
Barbore: 31.8mm
Angle: ±40°
Stack Height: 41mm



ITC-TB57

3D Forged
28.6 x 145/155/165mm
Barbore: 31.8mm
Angle: ±35°
Stack Height: 45mm



ITC-TB68

3D Forged
28.6 x 60/70/80/90/100/
110/120mm
Barbore: 31.8mm
Angle: ±7°
Stack Height: 40mm



ITC-TC7084

Forged
28.6 x 50mm
Bar Bore: 25.4mm
Angle: ±7°
Stack Height: 40mm



ITC-TF1F088

2D Forged
22.2 x 80mm
Bar Bore: 25.4mm
Angle: 25°



ITC-299

Plastic sleeve with Steel
/Cr-Mo/Alloy inner peg
Length: 113mm
Diam: 40mm
Adaptor: 14 to 10mm



IN-TEK CORP.

Asia Bike Media 176

盈昌事業有限公司

彰化縣51648埔鹽鄉成功路一段288號
No. 288, Sec. 1, Chenggong Road, PuYen Hsiang,
Changhua 51648, Taiwan
Tel: +886-4-8853088 Fax: +886-4-8852306
E-mail: ken@in-tek.com.tw / ken.lee8899@msa.hinet.net

崇鑫金屬(惠州)有限公司

廣東省惠州市仲愷高新區歷林鎮環城街23號
No.23, Huancheng street,Lilin town, Zhongkai
high-tech zone, Huizhou City, Guangdong, China.
Tel: +86-752-3868101, 3868102 Fax: +86-752-3868106



● ANATOMIC ● ALLOY T6
● 26.0 - 380 / 400 / 420 / 440mm



● Q-RACE/T-POC ● ALLOY T6
● 26.0 - 470mm



● CROW/FREERIDE ● CARBON
● 31.8 - 580mm / 31.8 - 640mm



● KX VENUS ● CARBON
● 31.8 - 380 / 400 / 420mm



● KX CURVISSMA ● CARBON
● 31.8 - 380 / 400 / 420mm



● KALI ● ALLOY W/CARBON or ALLOY
● 31.8 - 380 / 400 / 420mm



● VENUS ● ALLOY T6
● 26.0 - 340 / 360 / 380 / 400 / 420mm
● 31.8 - 380 / 400 / 420mm



● X-BOOST ● ALLOY T6
● 26.0 - 380 / 400 / 420mm
● 31.8 - 380 / 400 / 420mm



New !!

A:
● X BOOST ● ALLOY T6
● 27.2 ~ 31.6 ● L : 260 / 310mm

B:
● KX SEAT POST ● UD CARBON
● 27.2 - 270mm ● 31.6 - 310mm

C:
● PISTA ● ALLOY FORGE CNC
● 27.2 - 270mm ● 31.6 - 310mm



● Q-MARS ● ALLOY CNC
● 26.0mm - Ext: 80 / 90 / 100 / 110 / 120mm



● KALI ● ALLOY W/CARBON
● 31.8 - 90 / 100 / 110 / 120 / 130mm

RYSTAR
SINCE 1988
RYSTAR INTERNATIONAL CO.,LTD.
www.rystar.com.tw

安爵國際興業股份有限公司

Tel : 886-4-2270 9702 Fax : 886-4-2276 3203
E-mail : r2799214@ms47.hinet.net

PRODUCTION OF MODOLO AND RYSTAR

POKER GRIPS

Catcher Poker grips are using soft polymer technology to provide high level of comfort control and responsiveness.



WARRIOR



WHITE
BAR DIA: Ø22.2MM
WEIGHT: 282G
EXTENSION: 45MM
HIGH: 30MM
STEERER: 28.6MM

ST-607

ANODIZED 5COLOR

STM400

BAR DIA: Ø22.2MM WEIGHT: 234G
EXTENSION: 45MM HIGH: 30MM
STEERER: 28.6MM

Distributors Wanted
SPORZA INTERNATIONAL CO., LTD

TEL: +886-4-2463-1330 FAX: +886-4-2463-2795

E-mail: keicie@sporzabike.com


WHITE

ST STEM 601

BAR DIA: Ø22.2MM
WEIGHT: 263G
EXTENSION: 45MM
HIGH: 30MM
STEERER: 28.6MM



A-HEAD CNC MACHINED STEM 6061 T6 ALLOY

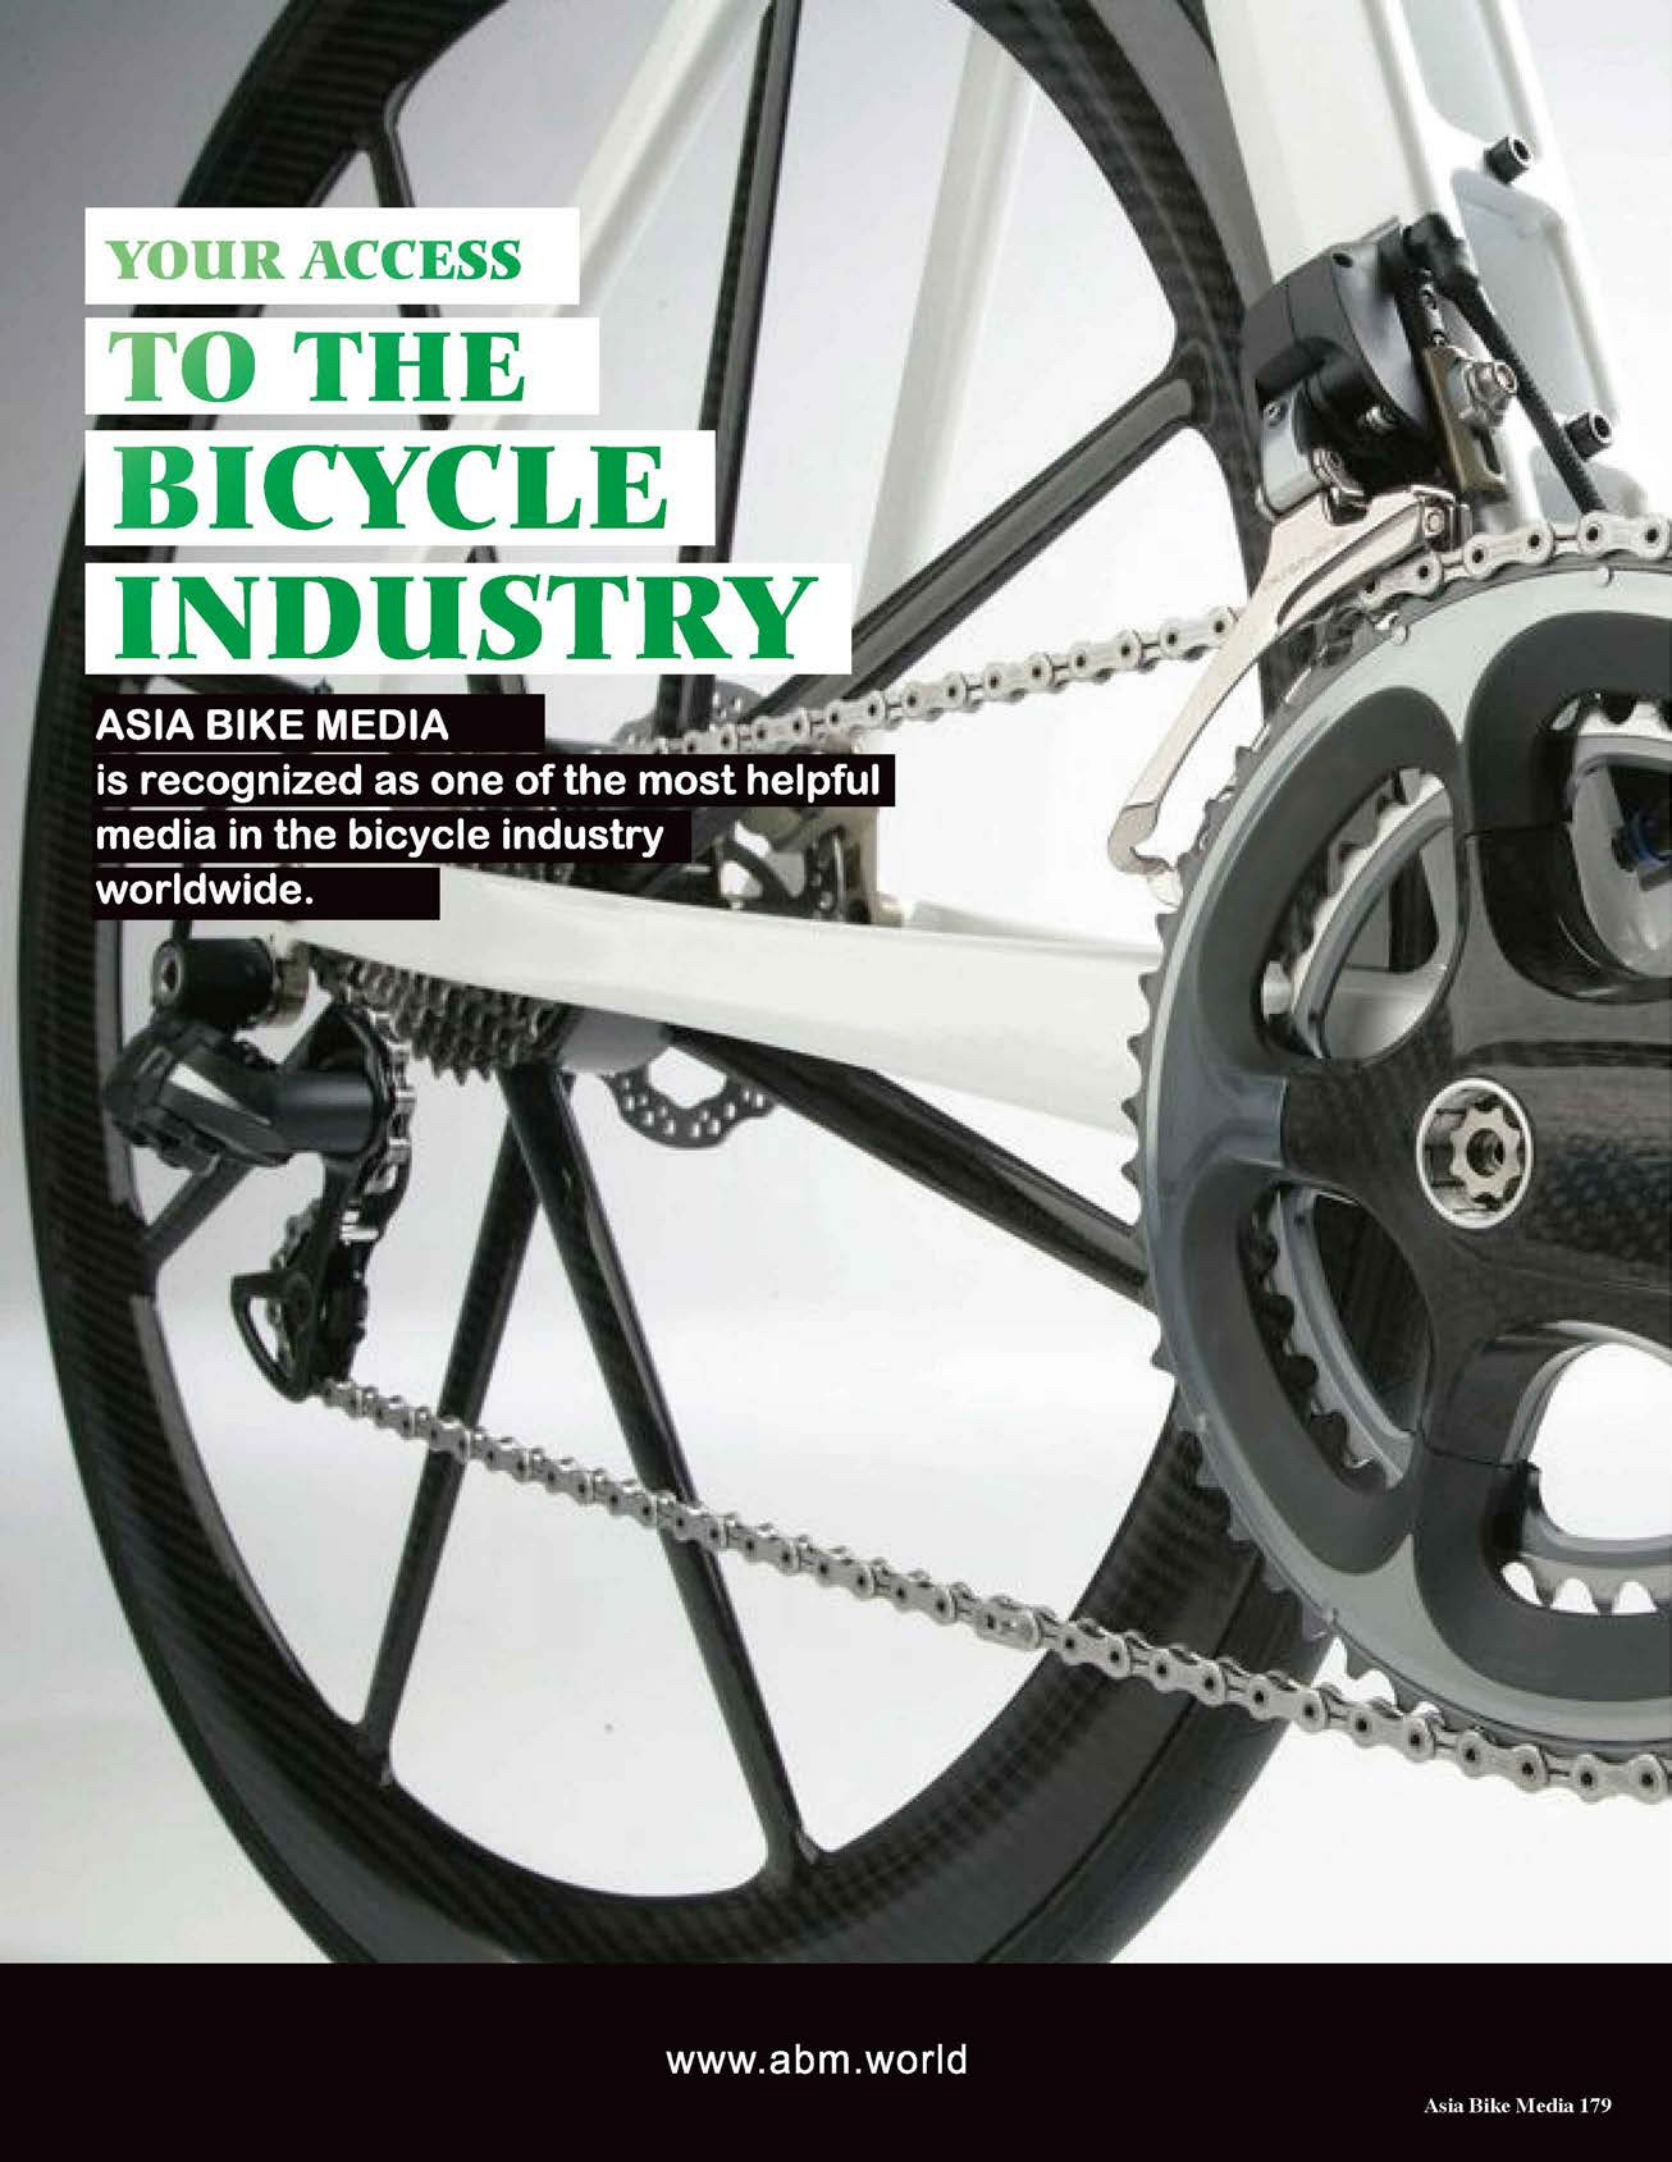A close-up, low-angle shot of the rear half of a white bicycle. The focus is on the black carbon fiber wheel, the silver chain, and the black cassette. The white frame of the bike is visible in the upper right. The background is a plain, light-colored surface.

YOUR ACCESS

TO THE

BICYCLE

INDUSTRY

ASIA BIKE MEDIA

**is recognized as one of the most helpful
media in the bicycle industry
worldwide.**



Hydraulic Disc Brake



HJ-OD07



HJ-OD04



HJ-OD05

System	Open system Dual piston hydraulic disc brake Non-corrosive mineral oil Weight : Front 300g (caliper+lever) / wheel Rear 317g (caliper+lever) / wheel	Open system Dual piston hydraulic disc brake Non-corrosive mineral oil Weight : Front 340g (caliper+lever) / wheel Rear 359g (caliper+lever) / wheel	Open system Dual piston hydraulic disc brake Non-corrosive mineral oil Weight : Front 322g (caliper+lever) / wheel Rear 340g (caliper+lever) / wheel
Rotor	HJ-DXR1606 Diameter : 160mm (F/R)	HJ-DXR1606 Diameter : 160mm (F/R)	HJ-DXR1606 Diameter : 160mm (F/R)
Caliper	Forged alloy body Automatic caliper positioning Pad : HJ-DS10 (compatible Shimano)	Forged alloy body Automatic caliper positioning via adapters front and rear Pad : High performance metal ceramic compound HJ-DS10 (compatible Shimano)	Forged alloy body Automatic caliper positioning via adapters front and rear Pad : High performance metal ceramic compound HJ-DS10 (compatible Shimano)
Lever	Melt-forged alloy 2-Fingers design	Forged alloy body 2-Fingers design	Melt-forged alloy body 3-Fingers design

Mechanical Disc Brake

HJ-MD11



System ball bearing system, adapter for "IS" mount
Control cable actuated
Caliper melt-forged aluminum
Pad HJ-DS10
Rotor stainless steel front/rear : 160mm HJ-DXR1604
Weight 250g/wheel

HJ-MD15



System ball bearing system, adapter for "IS" mount
Control cable actuated
Caliper melt-forged aluminum
Pad HJ-DS38
Rotor stainless steel front/rear : 160mm HJ-DXR1604
Weight 225g/wheel

HJ-MD16



System Ball bearing system
Control cable actuated
Caliper Melt-forged Alloy / Steel
Pad HJ-DS10 (compatible Shimano)
Rotor stainless steel front/rear : 160mm HJ-DXR1604
Weight 214g/wheel

Brake Lever



HJ-261AG



Bracket / Lever super nylon composite / forged alloy
Clamp diameter 22.2-23.8mm
Weight 248g/pair



HJ-R263A



Bracket / Lever forged alloy for use with caliper or
cantilever brakes
Clamp diameter 22.2/23.8/28.6/31.8mm
Weight 104g/pair



HJ-272AQ



Bracket / Lever super nylon composite / forged alloy
Clamp diameter 22.2-23.8mm
Weight 193g/pair



HJ-R265A



For use with caliper or cantilever brakes
Internal cable position design

Bracket Aero bar ID
Weight melt-forged / Lever forged alloy
Ø19.8 / Ø20.8
162g/pair



HJ-290ADV



Bracket / Lever
HJ-290ADV : Melt-forged alloy 210g/pair
HJ-290PDV : Nylon composite 203g/pair
Melt-forged alloy

Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter

HJ-290PDV



HJ-3030ADV



Bracket / Lever
HJ-3030ADV : Melt-forged alloy 175g/pair
HJ-3030PDV : Nylon composite 170g/pair
Melt-forged alloy

Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter

HJ-3030PDV



HJ-3022ADV



Bracket / Lever
HJ-3022ADV : Melt-forged alloy 215g/pair
HJ-3022PDV : Nylon composite 174g/pair
Melt-forged alloy

Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter

HJ-3022PDV



HJ-3032ADV



Bracket / Lever melt-forged alloy
Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter
Weight 208g/pair



HJ-3033ADV



Bracket / Lever melt-forged alloy
Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter
Weight 210g/pair



HJ-213ADV



Bracket / Lever melt-forged alloy
Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter
Weight 220g/pair



HJ-3027ADV



Bracket / Lever
HJ-3027ADV : Melt-forged alloy 212g/pair
HJ-3027PDV : Nylon composite 208g/pair
Melt-forged alloy

Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter

HJ-3027PDV



HJ-4120AD



Bracket / Lever melt-forged alloy
Compatible brake type caliper or cantilever brakes
Weight 185g/pair



HJ-4123AD



Bracket / Lever
HJ-4123AD : Melt-forged alloy 149g/pair
HJ-4123PD : Nylon composite 142g/pair
Melt-forged alloy

Compatible brake type caliper or cantilever brakes

HJ-4123PD



HJ-4133ADV



Bracket / Lever melt-forged alloy
Compatible brake type direct-pull brakes
Compatible shifter twist & thumb shifter
Weight 195g/pair



HJ-3043ADC



Bracket / Lever Melt-forged alloy
Compatible brake type twist & thumb shifter
Compatible shifter direct-pull brakes

HJ-3042ADC



Caliper Brake



HJ-424ADQ



Arms melt-forged alloy
Power reinforcement with dual-pivot device
Dimension 39-51mm
with quick release
Standard shoes 406.11 (adjustable angle)
Weight 187g/wheel



HJ-N401AQ3



Arms forged alloy
Power reinforcement with dual-pivot device
Dimension 39-49mm
with quick release
Standard shoes 401.11 (adjustable angle)
Weight 184g/wheel



HJ-421ADQ



Arms melt-forged alloy
Power reinforcement with dual-pivot device
Dimension 39-49mm
with quick release
Standard shoes 405.11 (adjustable angle)
Weight 180g/wheel



HJ-N402AQ3



Arms forged alloy
Power reinforcement with dual-pivot device
Dimension 43-57mm
with quick release
Standard shoes 401.11A (adjustable angle)
Weight 190g/wheel



HJ-422ADQ



Arms melt-forged alloy
Power reinforcement with dual-pivot device
Dimension 47-59mm
with quick release
Standard shoes 405.11 (adjustable angle)
Weight 190g/wheel



HJ-N405AQ



Arms forged alloy
Power reinforcement with dual-pivot device
Dimension 54.5-76.5mm
with quick release
Standard shoes 405.11 (adjustable angle)
Weight 184g/wheel

U-Brake



HJ-928ADU



Arms melt-forged alloy
Manual springhanger
Dimension 24-43mm
Standard shoes 601.12 (60mm)
Weight 180g/wheel



HJ-923ADU



Arms melt-forged alloy
Manual coil type
Dimension 29-45mm
Standard shoes 601.12 (60mm)
Weight 176g/wheel



HJ-926ADU



Arms melt-forged alloy
Manual coil type
Dimension 29-45mm
Standard shoes 601.12 (60mm)
Weight 180g/wheel



HJ-922AG



Arms forged alloy
Manual linear type
Dimension 21-35mm
Standard shoes 601.12 (60mm)
Weight 173g/wheel



HJ-924AD



Arms melt-forged alloy
Manual coil type
Dimension 21-35mm
Standard shoes 601.12 (60mm)
Weight 175g/wheel

V-Brake



HJ-7011AD7



Arms melt-forged alloy
Spring system linear type
Dimension 18-36mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 180g/wheel



HJ-623ADX



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 180g/wheel



HJ-622AD7



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 180g/wheel



HJ-624AD



Arms melt-forged alloy
Spring system coil type
Dimension 20-36mm
Standard pipe shoes 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 183g/wheel



HJ-612AD7



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe HJ-601.12 (60mm)
Guide pipe F/90° R/135°
Weight 194g/wheel



HJ-621ADX



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 194g/wheel



HJ-732AD



Arms melt-forged alloy
Spring system coil type
Dimension 20-36mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 170g/wheel



HJ-721ADX



Arms melt-forged alloy
Spring system linear type
Dimension 22-39mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 181g/wheel



HJ-725AD7



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 196g/wheel



HJ-728AD for E-Bike



Arms forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe 600.12T3 (70mm)
Guide pipe F/90° R/135°
Weight 198g/wheel



HJ-811AD7



Arms melt-forged alloy
Spring system linear type
Dimension 20-38mm
Standard pipe shoes 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 180g/wheel



HJ-812AD7



Arms melt-forged alloy
Spring system linear type
Dimension 20-40mm
Standard pipe 601.12 (60mm)
Guide pipe F/90° R/135°
Weight 198g/wheel





PR-C213N Road Caliper

- ▶ **CATEGORY**
C-Road caliper
Superior modulation system
- ▶ **MATERIAL**
Alloy
- ▶ **DIMENSION**
41-51mm
Fit tire width 23C-28C
- ▶ **PADS**
Adjustable angle pads
- ▶ **FEATURES**
With symmetric pivot
Ball bearing to increase the modulation
Light weight
- ▶ **Performance**
The braking power increases 20% than 105.
Great braking efficiency and control.
- ▶ **WEIGHT**
163g



PR-C213

WEIGHT
177g

BOXER Hydraulic Rim Brake

Perfect for Electric & Trekking bike

- ▶ **SYSTEM**
Closed system, Dual piston
Radial master cylinder hydraulic rim brake
Easy installation, adjustment and maintenance
- ▶ **CALIPER**
Forged aluminum body
Automatic caliper positioning via right and left adapters
Parallel design provide better braking performance
Color : Black
- ▶ **LEVER**
Forged aluminum bracket & lever
Reach adjustment
Two pieces bracket designed
3 finger blade
Color : Black
- ▶ **PADS**
High performance rubber compound
Easy replacement
- ▶ **FLUID**
Non-corrosive mineral oil
- ▶ **WEIGHT**
Front wheel – 377g
Rear wheel – 385g



boxer Your safety buddy!



VICTOR

- ◊ **Category**
MTB
- ◊ **Material**
Brake lever / Melt-forged alloy
Caliper / Forged alloy
- ◊ **System**
Dual-piston
Open system hydraulic disc brake
- ◊ **Pads**
DP-HS10
Compatible with Shimano
- ◊ **ROTOR**
High heat dispersion & heat tolerance
Diameter : $\varnothing 160\text{mm}$
Options : $\varnothing 180\text{mm}$ / $\varnothing 203\text{mm}$
- ◊ **Fluid**
Non-corrosive mineral oil
- ◊ **Weight**
F / 300g (Excludes rotor)
R / 320g (Excludes rotor)



TWINER Mechanical Disc Brake

DUAL-PISTON

- ◊ **DUAL-PISTON**
TWINER-M for MTB
TWINER-R for Road
- ◊ **PADS**
DP-HS10 (compatible Shimano®)
Easy for installation and replacement
- ◊ **FEATURE**
Dual-piston actuation to prevent from deformation of the rotor.
Tool free adjustment for pads wearing.



Tool free adjustment



Easy for pads installation



TWINER

COOPER Hydraulic Disc Brake

- ◊ **SYSTEM**
Open system, Dual piston
Radial master cylinder hydraulic disc brake
Easy installation, adjustment and maintenance
- ◊ **CALIPER**
Forged aluminum body
Automatic caliper positioning via front and rear adapters
Color : Black
- ◊ **LEVER**
Forged aluminum bracket & lever
Reach adjustment
Two pieces bracket designed
2 finger blade
Color : Black
- ◊ **PADS**
High performance metal ceramic compound
Easy replacement
- ◊ **ROTOR**
High heat dispersion & heat tolerance
Diameter : $\varnothing 160\text{mm}$
Options : $\varnothing 180\text{mm}$ / $\varnothing 203\text{mm}$
- ◊ **FLUID**
Non-corrosive mineral oil
- ◊ **WEIGHT**
Front wheel – 286g (Excludes rotor)
Rear wheel – 306g (Excludes rotor)



COOPER

LANCER Hydraulic Disc Brake

- ◊ **SYSTEM**
Open system, Dual piston
Radial master cylinder hydraulic disc brake
Easy installation, adjustment and maintenance
- ◊ **CALIPER**
Forged aluminum body
Automatic caliper positioning via front and rear adapters
Color : Black
- ◊ **LEVER**
Forged aluminum bracket & lever
Reach adjustment
Two pieces bracket designed
2 finger blade
Color : Black
- ◊ **PADS**
High performance metal ceramic compound
Easy replacement
- ◊ **ROTOR**
High heat dispersion & heat tolerance
Diameter : $\varnothing 160\text{mm}$
Options : $\varnothing 180\text{mm}$ / $\varnothing 203\text{mm}$
- ◊ **FLUID**
Non-corrosive mineral oil
- ◊ **WEIGHT**
Front wheel – 300g (Excludes rotor)
Rear wheel – 320g (Excludes rotor)



LANCER



F1 (DSK-927)

Brake Lever
Reach adjustment
Casting alloy lever and brake lever body
Great modulation with ergonomic lever design
Caliper
Compact 2-pcs design caliper
Dual piston
Heat-insulating piston
Forged alloy caliper body

Open system
Easy access bleeding hole

Fluid: Mineral oil
Pads: Sintered
Caliper: DC-927

Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm (front & rear)
Weight: 237g / wheel
Packing: 25pcs / ctn / 1.34cft
Produced in: Taiwan



PD099S



FH140F FH160F FM160R



DSK-923



DSK-915



SOLVE (DSK-923/DSK-923S/DSK-923T) SOLVE (DSK-915/DSK-915S/DSK-915T)

Brake Lever
Reach adjustment
Aluminum alloy lever and brake lever body
Great modulation with ergonomic lever design
DSK-923 : 2-finger design
DSK-915 : 1-finger design
DSK-915S : 3-finger design
Caliper
Compact 2-pcs design caliper
Dual piston
Heat-insulating piston
Forged alloy caliper body
Compatible with post-mount (Manitou) type
Adapter available for international standard

Open system
Easy access bleeding hole

Fluid: Mineral oil
Pads: Sintered
Caliper: DC-923 / DC-915
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm (front & rear)
Weight: DSK-923: 304g / wheel
DSK-915: 320g / wheel
Packing: 25pcs / ctn / 1.34cft
Produced in: Taiwan



PD099S



DSK-925



DSK-926



SOLVE-ST (DSK-925/DSK-926)

Brake Lever
Reach adjustment
Steel lever
Great modulation with ergonomic lever design
DSK-925: 2-finger design
DSK-926: Short-reach 74-80mm
DSK-926: Designed specifically for junior
Caliper
Compact 2-pcs design caliper
Dual piston
Heat-insulating piston
Forged alloy caliper body
Compatible with post-mount (Manitou) type
Adapter available for international standard

Open system
Easy access bleeding hole

Fluid: Mineral oil
Pads: Sintered
Caliper: DC-925/DC-926
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm (front & rear)
Weight: 298g / wheel
Packing: 25pcs / ctn / 1.34cft
Produced in: Taiwan



PD099S



DSK-922M



DSK-922T



LUCID E4 (DSK-922M) LUCID E4 (DSK-922T) [SENSOR-TYPE E-BIKE HYDRAULIC DISC BRAKE KIT] DESIGN FOR 45KM/HR E-BIKE

Brake Lever
Ambidextrous lever for both right and left hand sides
Reach adjustment
Aluminum alloy lever and bracket
Great modulation with ergonomic lever design
DSK-922M: 2-finger blade with ball end
DSK-922T: 4-finger blade with ball end
Caliper
Compact 2-pcs design caliper
4 piston
Heat-insulating piston
Forged alloy caliper body
Compatible with post-mount (Manitou) type
Adapter available for international standard

Open system
Easy access bleeding hole

Compatible with Shimano bleeding kit
Compatible with Shimano M755 / M756 pads

Fluid: Mineral oil
Pads: Sintered
Caliper: DC-930
Disc rotor: DT-180B (152g)
Standard rotor size: 180mm (front & rear)
Option rotor size: 203mm (front & rear)
Weight: 210g / wheel
Packing: 25pcs / ctn / 1.34cft
Produced in: Taiwan



PD209S



DSK-930T



DSK-930M



LUCID P4 (DSK-930M) LUCID P4 (DSK-930T) [SENSOR-TYPE EBIKE HYDRAULIC DISC BRAKE KIT]

Brake Lever
Reach adjustment
Casting alloy lever and brake lever body
Great modulation with ergonomic lever design
Using for E-bike (electric bike)
DSK-930M: 2-finger design
DSK-930T: 4-finger design
Caliper
Compact 2-pcs design caliper
4 piston
Heat-insulating piston
Forged alloy caliper body
Adjustable hose adapter
Compatible with post-mount (Manitou) type
Adapter available for international standard

Open system
Easy access bleeding hole
Compatible with Shimano bleeding kit

Fluid: Mineral oil
Pads: Sintered
Caliper: DC-930
Disc rotor: DT-160B (124g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm (front & rear), 203mm (front & rear)
Weight: 210g / wheel
Packing: 25pcs / ctn / 1.34cft
Produced in: Taiwan



PD209S



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



LUCID [DSK-920M] LUCID [DSK-920T] [SENSOR-TYPE E-BIKE HYDRAULIC DISC BRAKE KIT]

Brake Lever
Reach adjustment
Casting alloy lever and brake lever body
Great modulation with ergonomic lever design
Using for E-bike (electric bike)
DSK-920M : 2-finger design
DSK-920T : 4-finger design

Caliper
Compact 2-pcs design caliper
Dual piston
Heat-insulating piston
Forged alloy caliper body
Compatible with post-mount (Manitou) type
Adapter available for international standard

Open system
Easy access bleeding hole

Fluid:
Pads:
Caliper:
Disc rotor:
Standard rotor size:
Option rotor size:

Weight:

Packing:
Produced in:

Mineral oil
Sintered
DC-920
DT-160G (96g)
160mm (front & rear)
180mm (front & rear)
203mm (front & rear)
DSK-920M: 312g / wheel
DSK-920T: 311.4g / wheel
25pcs / ctn / 1.34cuf.
Taiwan



DECODE R [DSK-718R] [DUAL OPPOSED PISTON CALIPER]

Barrel cable adjuster design
Flat-Mount type for Road bikes

Material: Aluminum (swing arm & body)
Pads: Sintered
Caliper: DC-718R
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 140mm (rear)
Weight: 148g (includes Caliper / Screws)
Packing: 25pcs / ctn / 0.5cuf.
Produced in: Taiwan



RENDER [DSK-717] MTB RENDER R [DSK-717R] ROAD

The custom bolt on DSK-717 / DSK-717R swing arm that locks the brake cable can be easily adjusted by 5mm Allen key or 10mm hex wrench when installing the brake caliper on chain stay or seat stay disc brake mounts. Dual pad adjustment with one inboard pad adjustment knob and barrel cable adjuster. Post-Mount type (Int'l Std. adapter available)

Material: Aluminum (swing arm & body)
Pads: Sintered
Caliper: DC-717 / DC-717R
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: RENDER: 180mm (front & rear), 203mm (front & rear)
RENDER R: 140mm (rear)
Weight: 160g (Caliper)
Packing: 25pcs / ctn / 0.5cuf.
Produced in: Taiwan



DSK-400 DSK-420 [MECHANICAL FLOATING DISC BRAKE]

Adjusting for caliper and rotor alignment can sometimes be a pain. To address this issue, Promax has adopted a tool-free "floating feature" in its DSK-400 disc brake to realize a convenient micro-adjust feature so its users can quickly adjust the brake system with ease.

Tool-free caliper adjustment knob
One inboard pad adjustment knob
DSK-420: Special for Tri-cycle & Wheel Chair
International standard



TOOL FREE
Pad adjustment knob

Pads: Sintered
Caliper: DC-400 / DC-420
Disc rotor: DT-160H (121g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm (front)
Weight: 216g (Caliper)
Finish: Black
Packing: 25pcs / ctn / 0.5cuf.
Produced in: Taiwan / China



DSK-330R

One inboard pad adjustment (5mm Allen key)
and barrel cable adjuster design
Flat-Mount type for Road bikes

Material: Aluminum (swing arm & body)
Pads: Sintered
Caliper: DC-330R
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 140mm (rear)
Weight: 128g (includes Caliper / Screws)
Packing: 25pcs / ctn / 0.5cuf.
Produced in: Taiwan



DISC BRAKES



DSK-310

One inboard pad adjustment (5mm Allen key)
and barrel cable adjuster design
Post-Mount type (Int'l Std. adapter available)

Pads: Sintered
Caliper: DC-310
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 180mm, 203mm (front & rear)
DT-180G / DT-230G
Weight: 169g (Caliper)
Finish: Black
Packing: 25pcs / ctn / 0.51cuft
Produced in: Taiwan / China



DSK-300

DSK-300R

DSK-300 MTB DSK-300R ROAD

One inboard pad adjustment (5mm allen key)
and barrel cable adjuster design
Post-Mount type (Int'l Std. adapter available)

Material: Aluminum (swing arm & body)
Pads: Sintered
Caliper: DC-300 / DC-300R
Disc rotor: DT-160G (96g)
Standard rotor size: 160mm (front & rear)
Option rotor size: 140mm (front & rear)
180mm (front & rear)
203mm (front & rear)
Weight: 135g (Caliper / Screws)
Packing: 25pcs / ctn / 0.51cuft
Produced in: Taiwan



BRAKES



DSK-920T

RC-901 [HYDRAULIC RIM BRAKE]

Direct mount with booster
Quick release
Heat-insulating piston
Easy pad replacement
Pad angle adjustment
Brake Lever
4 finger design / DSK-920T

Open system
Easy access bleeding hole

Material: Forged aluminum alloy caliper body
Pads: Design for HS 33 pad
Weight: 298g
Finish: Anodized / S.B. Color
Packing: 25pcs / ctn / 0.5cuft
Produced in: Taiwan



Option: UN-102 Alloy swivel universal link

TX-131



30mm vertical adjustable range for brake shoes
Dual linear spring tension adjuster

Material: Forged aluminum alloy caliper body
Arm length: 108mm
73mm angle adjustment pads: EN288MMW
Option: 70mm cartridge pads
Weight: 193g
Finish: Black / Red / Blue / Gold
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan



TX-127

Dual linear spring tension adjuster

Material: Forged aluminum alloy arms
Arm length: 108mm
70mm angle adjustment pads: 271MMW
Option: 70mm cartridge pads
Weight: 196g
Finish: Anodized / S.B. color
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan



TX-123



TX-121



TX-119L



TX-117

TX-123/TX-123D

Dual linear spring tension adjuster

Material: TX-123: Forged aluminum alloy arms
TX-123D: Aluminum alloy arms
Arm length: 108mm
70mm angle adjustment pads: 271MMW
Option: 70mm cartridge pads
Weight: TX-123: 162g
TX-123D: 193g
Finish: TX-123: Anodized / S.B. color
TX-123D: Black / Silver
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan: TX-123 China: TX-123D

TX-121/TX-122

Dual linear spring tension adjuster

Material: Aluminum alloy arms
Arm length: TX-121: 108mm
TX-122: 101mm
Weight: TX-121: 176g
TX-122: 171g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan / China

TX-119L/TX-119C

TX-119L: Dual linear spring tension adjuster
TX-119C: Dual Coiled spring tension adjuster

Material: Aluminum alloy arms
Arm length: 110mm
Weight: TX-119L: 190g
TX-119C: 189g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.16cuft
Produced in: Taiwan / China

TX-117/TX-107L/C

TX-117: Dual linear spring tension adjuster
TX-107L/C: Dual coiled spring tension adjuster

Material: Aluminum alloy arms
Arm length: TX-117: 108mm
TX-107L / C: 101mm
Weight: TX-117: 184g
TX-107L / C: 184g / 183g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan / China



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



TX-115C

Dual coiled spring tension adjuster

Material: Aluminum alloy arms
Arm length: 108mm
Weight: 185g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.34cuft
Produced in: China



TX-125L

FOR CRUISER

Dual linear spring tension adjuster

Material: Aluminum alloy arms
Arm length: 125mm
60mm angle adjustment pads: 260MMV
Weight: 201g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.34cuft
Produced in: China



MV-88

PROMAX

30 mm vertical adjustable range for brake shoes
Dual linear spring tension adjuster

Material: Forged aluminum alloy arms
Arm length: 85mm
73mm angle adjustment pads: EN288MW
Option: 70mm cartridge pads
Weight: 186g
Finish: Black / Red / Blue / Gold
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan



CB-106

CANTI brake

Material: Aluminum alloy arms
Arm length: 55 mm
Weight: 170g
Finish: Black / Silver / Powder coated color
Produced in: China



MV-85

**CYCLO CROSS
MINI V-BRAKE**

Dual linear spring tension adjuster

Material: Forged aluminum alloy arms
Arm length: 85mm
70mm angle adjustment pads: 271MW
Option: 70mm cartridge pads
Weight: 156g
Finish: Black / Silver / Anodized color
Packing: 100pcs / ctn / 1.16cuft
Produced in: Taiwan



RC-487

PROMAX

Dual symmetric pivot brake design offering less friction
Dual pivot caliper brake with quick release
Quick adjust function when rim small deformation
Ball bearing
Adjustable spring tension design
Hi-performance cartridge pads: CT-360

Material: Forged aluminum arms
Stroke: 39-52mm
Weight: F: 165g / R: 162g
Finish: High polished anodized Black
Packing: 100pcs / ctn / 1.16cuft
Produced in: Taiwan



MV-87

**CYCLO CROSS
MINI V-BRAKE**

Dual linear spring tension adjuster

Material: Aluminum alloy arms
Arm length: 85mm
70mm angle adjustment pads: 271MW
Weight: 155g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.16cuft
Produced in: China



RC-472

New SHIMANO mechanical ratio

Dual pivot caliper brake with quick release
Quick adjust function when rim small deformation
Ball bearing
Adjustable spring tension design
Hi-performance cartridge pads: CT-360

Material: Forged aluminum alloy arms
Stroke: 39-52 mm
Weight: F: 135g / R: 132g
Finish: High polished anodized Black / Silver
Packing: 100pcs / ctn / F: 1.69cuft / R: 1.34cuft
Produced in: Taiwan



MV-197/MV-197NC

Dual linear spring tension adjuster
MV-197 W/O CNC cut

Material: Forged aluminum alloy arms
Arm length: 95mm
70mm angle adjustment pads: 271MW
Weight: 194g
Finish: Black / Silver / Anodized / Powder coated color
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan



RC-476

New SHIMANO mechanical ratio

Dual pivot caliper brake with quick release
Light quick release mechanism
Hi-performance cartridge pads: CT-360

Material: Forged aluminum alloy arms
Stroke: 39-52mm
Weight: F: 146g / R: 143g
Finish: High polished anodized Black / Silver
Packing: 100pcs / ctn / 1.34cuft
Produced in: Taiwan



MV-92C

Dual coiled spring tension adjuster

Material: Aluminum alloy arms
Arm length: 95mm
Weight: 172g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.16cuft
Produced in: China

BRAKES



RC-471

Dual pivot caliper brake with quick release
Light quick release mechanism
Hi-performance cartridge pads: CT-360

Material: Forged aluminum alloy arms
Stroke: 39-52 mm
Weight: F: 136g / R: 135g
Finish: High polished anodized Black / Silver
Packing: 100pcs / ctn / F: 1.69cuft / R: 1.34cuft
Produced in: Taiwan



RC-482

New mechanical ratio
Dual pivot caliper brake
Light quick release mechanism
Hi-performance cartridge pads: CT-321

Material: Aluminum alloy arms
Stroke: 47-60mm
Weight: F: 163g / R: 160g
Finish: Black / Silver
Packing: 100pcs / ctn / 1.16cuft
Produced in: China



RC-452CF/RC-452

Dual pivot caliper brake
Light quick release mechanism
Hi-performance cartridge pads: CT-321

Material: Forged aluminum alloy arms
Stroke: 39-49mm
Weight: RC-452: F: 164g / R: 161g
RC-452CF: F: 165g / R: 162g
RC-452: Anodized Black / Silver
RC-452CF: Carbon Fiber 3K Weave Wrap
Packing: 100pcs / ctn / F: 1.34cuft
Produced in: Taiwan



RC-483

New mechanical ratio
Dual pivot caliper brake
Light quick release mechanism

Material: Aluminum alloy arms
Stroke: 55-73mm
Weight: F: 203g / R: 199g
Finish: Black / Silver
Packing: 100pcs / ctn / 1.16cuft
Produced in: China

RC-452CF



RC-481

New SHIMANO mechanical ratio
Dual pivot caliper brake
Light quick release mechanism
Hi-performance cartridge pads: CT-321

Material: Aluminum alloy arms
Stroke: 39-52mm
Weight: F: 152g / R: 149g
Finish: Black / Silver
Packing: 100pcs / ctn / 1.34cuft
Produced in: China



RC-453

Caliper brake central bolt
Light quick release mechanism

Material: Aluminum alloy arms
Stroke: 48-64mm
Weight: F: 178g / R: 174g
Finish: Black / Silver
Packing: 100pcs / ctn / 1.34cuft
Produced in: China



RC-480

Dual pivot caliper brake with quick release
Light quick release mechanism
Hi-performance cartridge pads: CT-321

Material: Forged aluminum alloy arms
Stroke: 55-73 mm
Weight: F: 180g / R: 177g
Finish: High polished anodized Black / Silver
Packing: 50pcs / ctn / 1.16cuft
Produced in: Taiwan



JC-301

Side-pull with strength structure brake arch

Material: Aluminum alloy arms
Stroke: 73-92mm
Weight: 214g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.69cuft
Produced in: Taiwan / China



RC-477

New mechanical ratio
Dual pivot caliper brake with quick release
Light quick release mechanism
Hi-performance cartridge pads: CT-321

Material: Forged aluminum alloy arms
Stroke: 47-60 mm
Weight: F: 155g / R: 152g
Finish: High polished anodized Black / Silver
Packing: 100pcs / ctn / 1.69cuft
Produced in: Taiwan



Y810AD DUAL PIVOTS

Dual pivot caliper brake

Material: Aluminum alloy arms
Stroke: 55-75mm
Weight: F: 193g / R: 143g
Finish: Black / Silver / Powder coated color
Packing: 100 pcs / ctn / 1.57cuft
Produced in: China



U-960 PROMAX

Low profile design
Dual coiled spring tension adjuster
Easy assembly mechanism on chain stay
The sleeve design reduce vibration degree
Replaceable front size of brake
The adjustment cap is redesigned for two tools

Material: Aluminum alloy arms
Weight: 212g
Finish: Black
Packing: 100pcs / ctn / 1.69cuft
Produced in: Taiwan / China

CARTRIDGE PADS OPTIONS



CT-387

CT-360

CT-358W



CT-320

CT-321



U-961 PROMAX

Low profile design
Dual coiled spring tension adjuster

Material: Aluminum alloy arms
Weight: 175g
Finish: Black / Silver Powder coated color
Packing: 100pcs / ctn / 1.56cuft
Produced in: China



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



U-980R

U-980R (REAR ONLY) U-981F (FRONT ONLY) U-982F (FRONT ONLY) U-983R (REAR ONLY)

Casing stopper at left side from rider
Casing stopper at right side from rider
Casing stopper at dual side
Dual coiled spring tension adjuster

Material: Aluminum alloy arms
Weight: U-980R: 217g
U-981F: 211g
U-982F: 212g
U-983R: 206g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.69cuf
Produced in: China



959

959/159A

Internal cable routing design
Ergonomic lever specifically designed for left and right hand comfort
Expandable plug clamp design

Material: 959: Forged aluminum alloy bracket with Carbon Fiber lever
159A: Forged aluminum
Aero bar I.D.: Ø19.8 / Ø20.8mm
Weight: 959: 69.6g / 159A: 80.6g
Finish: 959: Bracket: Anodized / S.B. color
Lever: Carbon Fiber 3K Weave
159A: Anodized / S.B. color
Packing: 959: 100pcs / ctn / 0.87cuf
159A: 100pcs / ctn / 0.53cuf
Produced in: Taiwan



159A



For hand rest & better steering
Internal cable routing design

BL-253

Light weight design
Aero lever
Forming aluminum lever
Ergonomic lever design
Quick release mechanism

Material: Aluminum alloy lever
Aero bar I.D.: Ø23.8-Ø24.2
Weight: 129.4g
Finish: Silver lever / Black rubber hood
Packing: 100pcs / ctn / 1.34cuf
Produced in: Taiwan



QR

BL-250

Aero-lever with rubber cover and return spring

Material: Aluminum alloy lever
Aero bar I.D.: Ø22.2 / Ø23.8mm
Option: BL-250AP: resin bracket
Weight: 120g
Finish: Black / Silver
Packing: 100pcs / ctn / 1.16cuf
Produced in: China



Ergonomic design

HINGED TYPE

Excellent to fit the oversized handlebar

160A (TOP MOUNT LEVER) HINGED TYPE

Hinged type clamp design
Narrow clamp allows clamping close to stem on oversized handlebars
With reach adjuster, cable adjuster barrel & return spring
Ergonomic lever specifically designed for left and right hand comfort
For use with caliper or canti brakes

Material: Forged aluminum alloy
Design for: Ø31.8 mm O.D. handlebar.
Weight: 46.5g
Finish: Anodized / S.B. color
Packing: 100pcs / ctn / 0.53cuf
Produced in: Taiwan

175A HINGED TYPE

With reach adjuster

Material: AL6061-T6
Clamp ID: Ø31.8mm
Weight: 59.8g
Finish: Anodized / S.B. Color
Packing: 100pcs / ctn / 0.53cuf
Produced in: China



249A HINGED TYPE

With reach adjuster

Material: Aluminum alloy bracket w/ Forged aluminum lever
Clamp ID: Ø22.2 / Ø23.8mm
Weight: 53g: Ø22.2 / 58g: Ø23.8
Finish: Anodized / S.B. / Powder coated color
Packing: 100pcs / ctn / 0.87cuf
Produced in: China



XL-342 (2-FINGER) PROMAX

The unique patented design to integrate and to reduce the parts from the lock-on grip, giving it a more simplified yet elegant look. This mechanism also provides a stronger force to lock the grip much better.

"Knee saver" features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users' knee cap from the protruding bolt.

"V" point clamping system allows its users to tighten the levers with less force, granting them that much more energy for the joyful ride later.
Pin pivot for the light, smooth action & non-endplay

Material: Forged aluminum alloy lever
Weight: 69g
Bracket: Black
Lever: Black / Red / Blue / Gold
Packing: 100pcs / ctn / 0.87cuf
Produced in: Taiwan

XL-91/XL-91G (2-FINGER) PROMAX

Otherwise known as the "knee saver", XL-91 by Promax features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users' knee cap from the protruding bolt. The efficient "V" point clamping system allows its users to tighten the levers with less force, granting them that much more energy for the joyful ride later!
Note: Not to be used on carbon handlebars

Excellent modulation lever designed for DSK-715 Disc Brake and Avid Brakes
Pin pivot for the light, smooth action & non-endplay
Ambidextrous lever for both right and left hand sides

XL-91: Thumb shifter compatible only
XL-91G: Twist shifter compatible only

Material: Forged aluminum alloy lever
Weight: 85g
Finish: Black
Packing: 100pcs / ctn / 0.87cuf
Produced in: Taiwan



XL-91G

XL-102 (4-FINGER) PROMAX

Two Locking-block bracket design
Pin pivot for the light, smooth action & non-endplay
Ambidextrous lever for both right and left hand sides

Thumb shifter compatible only

Material: Forged aluminum alloy lever
Weight: 91g
Finish: Black
Packing: 100pcs / ctn / 0.87cuf
Produced in: Taiwan



XL-90/XL-90D (4-FINGER)

Linear pulled or Regular Canti brakes version available
Pin pivot for the light, smooth action & non-endplay
Optional: Ambidextrous lever for both right and left hand sides

Material: XL-90: Forged aluminum alloy lever
XL-90D: Aluminum alloy lever
Weight: 90.4g
Finish: XL-90: Anodized / S.B. / Powder coated color
XL-90D: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.16cuf
Produced in: XL-90: Taiwan
XL-90D: China



XL-90



XL-96

XL-96/XL-96G (3.5-FINGER)

Linear pulled or Regular Canti brakes version available
Pin pivot for the light, smooth action & non-endplay

XL-96: Thumb shifter compatible only
XL-96G: Twist shifter compatible only

Material: Aluminum alloy
Weight: XL-96: 100g / XL-96G: 102g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



LM-48 (4-FINGER)

For linear pulled brakes only

Material: Aluminum alloy
Weight: 94g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: Taiwan



XL-57

XL-57/BL-57 (4-FINGER)

Kraton rubber grip design easy on fingers
Linear pulled or Regular Canti brakes version available
Pin pivot for the light, smooth action & non-endplay
Thumb shifter compatible only

Material: Aluminum alloy w/ Kraton
Option: BL-57: Bolt-type
Weight: XL-57: 106g
BL-57: 107g
Finish: Black / Silver / Powder coated color
Kraton: Pearl gray / Blue
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



E-BIKE

LE-55AG (4-FINGER)

Sensor-type E-bike brake lever
For use with linear pull brake and twist shifter

Material: Aluminum alloy
Weight: 115g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-42

BL-42/BL-42G (2-FINGER)

Linear pulled or Regular Canti brakes version available

BL-42: Thumb shifter compatible only
BL-42G: Twist shifter compatible only

Material: Aluminum alloy
Weight: BL-42: 94g
BL-42G: 94g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: Taiwan / China



LE-57AG

Material: Aluminum alloy
Electrical wire: machine or electron
Finish: Bracket: Black / Lever: Silver
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-82

BL-82/BL-82G (3-FINGER)

Linear pulled or Regular Canti brakes version available

BL-82: Thumb shifter compatible only
BL-82G: Twist shifter compatible only

Material: Aluminum alloy
Weight: BL-82: 97g
BL-82G: 99g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-47 (4-FINGER)

Dual cable pulled lever, stop both wheels with one hand
Kraton rubber grip design easy for finger
Split clamp design

Material: Aluminum alloy w/ Kraton
Weight: 94g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 1.16cuft
Produced in: Taiwan



BL-46

BL-46AP

BL-46/BL-46G/BL-46AP (3-FINGER)

Linear pulled or Regular Canti brakes version available

BL-46: Thumb shifter compatible only
BL-46G: Twist shifter compatible only
BL-46AP: Thumb shifter compatible only
Resin bracket w/ Aluminum alloy lever

Material: Aluminum alloy
Weight: BL-46: 104g
BL-46G: 105g
BL-46AP: 95.8g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-53 (4-FINGER)

Equipped with long arm V-brakes (125mm)
Thumb shifter compatible only

Material: Aluminum alloy
Weight: 110g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-39

BL-39AP

BL-39/BL-39G/BL-39AP (4-FINGER)

Linear pulled or Regular Canti brakes version available

BL-39: Thumb shifter compatible only
BL-39G: Twist shifter compatible only
BL-39AP: Thumb shifter compatible only
Resin bracket w/ Aluminum alloy lever

Material: Aluminum alloy
Weight: BL-39: 101g
BL-39G: 101g
BL-39AP: 96g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



XL-341 (1-FINGER)



The unique patented design to integrate and to reduce the parts from the lock-on grip, giving it a more simplified yet elegant look. This mechanism also provides a stronger force to lock the grip much better.

"Knee saver" features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users' knee cap from the protruding bolt.

"V" point clamping system allows its users to tighten the levers with less force, granting them that much more energy for the joyful rider later.
Pin pivot for the light, smooth action & non-endplay

Material: Forged aluminum alloy lever
Weight: 68.3g
Bracket: Black
Lever: Black / Red / Blue / Gold
Packing: 100pcs / ctn / 0.87cuft
Produced in: Taiwan



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX

FS-373/XL-373 (2-FINGER)

Otherwise known as the "knee saver", FS373 / XL373 by Promax features a recessive bolt system to grant a more elegant look than the traditional levers while at the same time protecting its users knee cap from the protruding bolt. The efficient "V" point clamping system allows its users to tighten the levers with less force granting them that much more energy for the joyful ride later!

Note : Not to be used on carbon handlebars

Ambidextrous lever for both right and left hand sides

FS-373: Two locking-block bracket design
For U brake or Caliper brake

XL-373: For linear pulled brake
Pin pivot for the light smooth action & non-endplay

Material: Aluminum alloy
Weight: 74.4g
Finish: Black
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



XL-373

FS-340 (1.5-FINGER)

HINGED TYPE 

Short reach design for BMX lever

Material: Aluminum alloy
Weight: 95.5g
Finish: Black
Packing: 100pcs / ctn / 0.87cuft
Produced in: Taiwan



FS-339 (2-FINGER)

HINGED TYPE 

Short reach design for BMX lever

Material: Aluminum alloy
Weight: 97g
Finish: Black
Packing: 100pcs / ctn / 0.87cuft
Produced in: Taiwan



FS-428 (2-FINGER) **HINGED TYPE**

Hinged type clamp BMX lever
U brake or Caliper brake

Material: Aluminum alloy
Weight: 89g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



FS-378/XL-378 (2-FINGER)

FS-378: For U brake or Caliper brake
XL-378: For linear pulled brake

Material: Aluminum alloy
Weight: 78g
Finish: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



XL-378

BL-81AP/BG-81AP/BL-81/BL-81G (2-FINGER)

Linear pulled or Regular Canti brakes version available
For Linear pulled or Regular Canti brakes

BL-81AP: Thumb shifter compatible only
BG-81AP: Twist shifter compatible only
BL-81: Thumb shifter compatible only
BL-81G: Twist shifter compatible only

Material: Resin bracket w/ Aluminum alloy lever
Weight: BL-81AP: 93g / BG-81AP: 86g
BL-81: 97g / BL-81G: 112g
Finish: Bracket: Black
Lever: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



BL-81

BG-81AP

BL-30AP (2-FINGER)

For Linear pulled or Regular Canti brakes For Twist shifter

Material: Resin bracket w/ Aluminum alloy lever
Weight: 95g
Finish: Bracket: Black
Lever: Black / Silver / Powder coated color
Packing: 100pcs / ctn / 0.87cuft
Produced in: China



SHIMANO

PD099S



SHIMANO DEORE M515 / M475 / M395
C501 / C601 / M525
TEXTRO AURIGA / AQUILA / GEMINI / HDC300(W5)
PROMAX DSK-909 / SOLVE / LUCID / DECODE R /
ECAPSULE / F1

PD097S



SHIMANO DEORE
M555 / C900 / 901
NEKAVE

PD243S



SHIMANO SAINT
M810 / ZEE M840

PD209S



SHIMANO XT
M755 / 756
GRIMECA SYSTEM 8
SRAM 9.0
HOPE MONO M4
PROMAX LUCID R4

PD102S



SHIMANO XTR
M975 / 966 / 965 / SAINT M800 /
HOPE M801 / DEORE XT
M775 / 765 / 585 / 535 / R505

PD252S



SHIMANO XTR M985 /
M9000

AVID/SRAM

PD104S



AVID XX / X0 ELUXIR

PD071S



AVID BB5
PROMAX DC710 / DC720 / DC913
/ DSK-310 / RENDER / RENDER R /
DSK-300 / DSK-300R / DSK-330R

PD234S



AVID CODE

PD096S



AVID BB7 AND JUICY 5 / 7
PROMAX DC905 /
DC907 / DC908

PD209S



SHIMANO XT M755 / 756
GRIMECA SYSTEM 8
SRAM 9.0
HOPE MONO M4
PROMAX LUCID R4

PD255S



SRAM X.0

PD256S



SRAM RED

PD257S



SRAM CODE

PROMAX

PD06S



PROMAX
DC600 / DC610 /
DC610J

PD071S



AVID BB5
PROMAX DC710 / DC720 /
DC913 / DSK-310 / RENDER /
RENDER R / DSK-300 /
DSK-300R / DSK-330R

PD096S



AVID BB7 AND JUICY 5 / 7
PROMAX DC905 / DC907 /
DC908

PD070S




HAYES MAG / MX1 / HFX9
PROMAX DC600

PD090



MAGURA CLARA2000 /
LOUISE 1999-2001 /
PROMAX DC910

PD099S



SHIMANO DEORE
M515 / M475 / M395
C501 / C601 / M525
TEXTRO AURIGA / AQUILA /
GEMINI / HDC300(W5)
PROMAX DSK-909 / SOLVE /
LUCID / DECODE R

PD093S



MAGURA CLARA
2001-2002 /
LOUISE 2003-2006 /
LOUISE FR /
PROMAX DC903

PD091



DIATECH ANCHOR
PROMAX DC901 /
DC951

PD032



SUNTOUR SRI
PROMAX DC320 /
DC700



DT-160B/DT-180B/DT-203B

Available in 180mm: DT-180B
Diameter: DT-160B: 130g
DT-180B: 151.6g
DT-203B: 190g
Produced in: Taiwan



DT-140G/DT-160G
DT-180G/DT-203G

Diameter: DT-140G: 78.3g
DT-160G: 96g
DT-180G: 103.1g
DT-203G: 120.1g
Produced in: Taiwan



DT-140H/DT-160H/
DT-180H

Diameter: DT-140H: 110.6g
DT-160H: 119.8g
DT-180H: 132.6g
Produced in: China

BRAKES



Leechi NO.	Color	Panton NO.	Leechi NO.	Color	Panton NO.	Specification
211B	Darkred	P199C	217A	White		For Brake - Outer Diameter : 5mm - Coiled Steel - Length : to order
211E	Red	P185C	217B	Silver	PCool Gray5C	
211D	Pink	P232C	217C	Darkgray	PCool Gray8C	
211F	Hotpink	P806C	218A	Black	PBlack6C	
212A	Orange	P171C	218C	Slategray	PCool Gray10C	
212B	Orangered	P811C	221B	Laser Red		
212C	Chocolate	P1595C	223A	Laser Gold		
213A	Yellow	P106C	225B	Laser Blue		
213D	Fluorescent yellow	P389C	227D	Laser Silver		
213E	Saddlebrown	P161C	231A	Braided Red		For Shifting - Outer Diameter : 4mm - Linear Strands - Length : to order
214A	Yellowgreen	P367C	233A	Braided Gold		
214D	Springgreen		235A	Braided Blue		
214E	Mediumseagreen		237A	Braided Silver		
215B	Blue	P2945C	238A	Braided Black		
215C	Darkblue	P287C	238B	Braided Darkgray		
216A	Purple	P2587C				

Leechi NO.	Color	Leechi NO.	Color	Specification
121A	Glitter Red	152A	Transparent Red	For Brake - Outer Diameter : 5mm - Coiled Steel - Length : to order
123B	Glitter Yellow	153A	Transparent Yellow	
124A	Glitter Green	155A	Transparent Blue	
126A	Glitter Pink	157A	Transparent Silver	
127B	Glitter Silver	158A	Transparent Black	

PIPES: POWER MODULATOR & FLEXIBLE PIPE

PC-390 SS-48A



PC-281 SS-79A



Pipes: for linear-pull brake



FLAT MOUNT ADAPTER


FLAT MOUNT FORK + FLAT MOUNT DISC BRAKE



FH140F ϕ 140mm
FH160F ϕ 160mm
FM160F ϕ 160mm
FM160R ϕ 160mm

Brake Model	Front	Rear
DSK-927 (F1)	FH140F	FM160R
DSK-718R (DECODE R)		FM160R
DSK-330R		FM160R

M5 BOLT FOR REAR

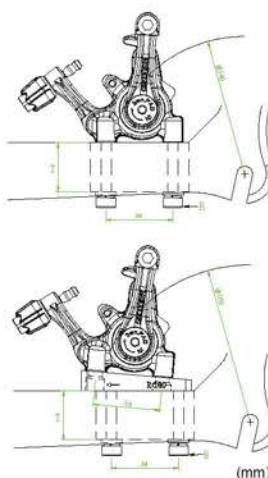

T(Rear mount thk.)	B(Bolt length)
10	21
12	23
15	26
20	31
25	36
30	41
35	46

INTERNATIONAL STANDARD



POST MANITOU



FLAT MOUNT FORK + POST MOUNT DISC BRAKE





TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: salechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX

HOUSING FERRULES

 NF-501AP ø5mm alloy nosed ferrule	 NF-502P ø5mm plastic nosed ferrule	 NF-401P ø4mm plastic nosed ferrule	 NF-402RP ø4mm plastic nosed ferrule with reincoat for SIS-SP40 shift cables	 CF-402PSK ø4mm plastic sealed ferrules for derail- leur(Kollars)	 CF-510AK ø5mm alloy shifter ferrules (Kollars)
 CF-407AK ø4mm alloy shifter ferrules (Kollars)	 CF-501BK ø5mm brass machined shifter ferrules (Kollars)	 CF-401BK ø4mm brass machined shifter ferrules (Kollars)	 CF-503B ø5mm regular ferrule for 2P cable housing	 CF-504B ø5mm brass ferrule for 2P cable housing	 CF-501PK ø5mm plastic shifter ferrule (Kollars)
 CF-401PK ø4mm plastic shifter ferrule (Kollars)	 CF-511A ø5mm alloy shifter ferrules	 CF-408P ø4mm plastic shifter ferrules	CABLE END CAP		RUBBER O-RINGS
 EC001A Alloy end cap for brake cable	 EC005A Alloy end cap for brake cable	 EC001P Plastic non-tool end cap	 DN-120 ø1.2mm rubber O-Rings for gear cable	 DN-160 ø1.6mm rubber O-Rings for brake cable	

806Q

MTB rear cage mount
Aluminum clamp for MTB bike
Clamp I.D.: Ø27.2 / Ø30.9 / Ø31.6
Finish: Black / Anodized
Packing: 250pcs / ctn / 0.66cuft
Produced in: Taiwan
Weight: 22.84g; Ø27.2 / 18.08g; Ø30.9 / 17.48g; Ø31.6



CA-01/CA-02

Derailleur cable inline adjuster
Include 4mm and 5mm end caps
Material: Alloy
Weight: CA-01: 5.6g / CA-02: 4g
Finish: Silver / Black / Gray / Anodized
Produced in: Taiwan



ECF-01R

Material: Plastic
Weight: 0.47g
Finish: Black / White / Yellow / Red
Produced in: China



TT-01R

Material: Plastic
Weight: 0.92g
Finish: Black / White / Yellow / Red
Produced in: China



SPECS. OF INNER CABLE

TYPE	O.D.	MATERIAL
Gearshift	1.2mm	Galvanized steel
	1.2mm	Stainless steel
	1.1mm	Slick galvanized steel
	1.1mm	Slick stainless steel
TYPE	O.D.	MATERIAL
Brake	1.5mm	Galvanized steel
	1.5mm	Stainless steel
	1.5mm	Slick galvanized steel
	1.5mm	Slick stainless steel
	1.6mm	Galvanized steel

PTFE NANO-COATING CABLE




BRAKE CABLE NIPPLE TYPE

MODEL	SPEC.	TYPE
CODE NO.01	ø7x8	MTB
CODE NO.02	ø7x7	MTB
CODE NO.03	ø7x6	MTB
CODE NO.04	ø6x11	Road
CODE NO.05	ø6x9	Road


STRADDLE CABLE NIPPLE TYPE

MODEL	SPEC.	TYPE
CBL-ST001	ø7 x 6 / ø6	Straddle for Canti
CBL-ST002	ø7 x 6 / 18.8	Straddle for Canti
CBL-ST003	ø7 x 6	Straddle for Canti



DERAILLEUR CABLE NIPPLE TYPE

MODEL	SPEC.
CODE NO.06	ø4.5 x 4.5
CODE NO.07	ø4.4 x 4.4
CODE NO.08	ø4 x 4



BRAKE SHOES

CT-387

Length: 54mm
• Replacement pads for cartridge brake
• Compatible with Shimano 105, Ultegra & Dura-Ace.
• Produced in: Taiwan



CT-360

• Forged aluminum cartridge pad
CNC windows to reduce weight.
Produced in: Taiwan




 CT-358W Length: 54mm	 CT-320 Length: 54mm	 CT-321 Length: 54mm	 462 Length: 53mm	 CT-378W Length: 70mm	 CT-380 Length: 70mm	 CT-370W Length: 70mm	 CARTRIDGE BRAKE Pads Color: to order Length: 70mm
 CT-470W Length: 70mm	 285WA Length: 70mm	 280UW Length: 65mm	 288MW Length: 73mm	 289MNW Length: 73mm	 279 PAD (70MM) • Efficient texture design assists water and dirt removed the rim • Produced In: Taiwan	 255NW Length: 70mm	 271MW Length: 70mm
 260MW Length: 60mm	 355M Length: 55mm	 301 Length: 55mm	 250 Length: 47mm	 251 Length: 50mm	 276UW WIDER PADS FOR U BRAKE Length: 70mm	 347 Length: 40mm 9°, For Stainless rim	 341 Length: 40mm 0°, For Alloy rim



煌傑金屬複合材料科技股份有限公司

HUANG CHIEH METAL COMPOSITE MATERIAL TECH. CO.,LTD

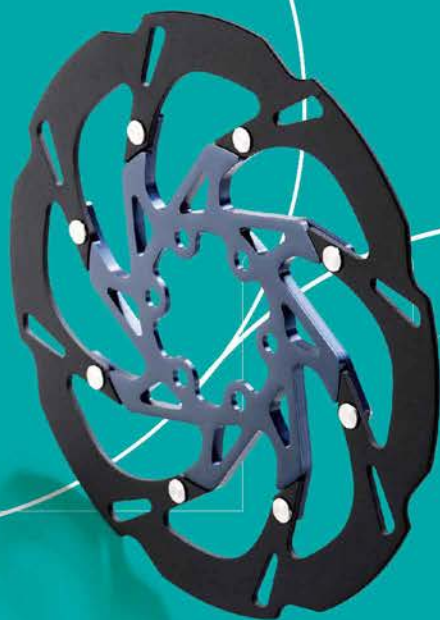

disc
rotor



wheel
rim

238新北市士林區大安路18-1號

No.18-1, Da'an Rd., Shulin Dist., New Taipei City 238, Taiwan

Tel:+886-2-26843811#31 Fax:+886-2-26837950

E-mail:sales@hc-m.com.tw

SCS
DELUXE



SCS WISDOM ROTOR



- | The first design allows consumers to replace only the rotor ring while reusing the rotor hat
- | The multinational patented warning function
- | Aerospace anti-loose mounting bolts
- | Conformity to international standards
- | Compatible with all brakes
- | Great braking force
- | Mistake-proofing design
- | 70% lower lifetime operating cost, 20% more profits and 300% longer life cycle
- | 45% lighter rotor than conventional rotors
- | Various sizes and colors are changeable

BRAKES

SCS was established in 1987 with a professional R&D team and a group of bicycle riders in Taiwan. For the past 30 years, SCS has sold over 596,700,000 pieces of brake pads around the world.



| Brake pads | Rotors | Disc Adapters |
| Hydraulic fluid & hoses | Housing and cables |

Learn more SCS products at www.scs-bicycle.com



Replace rotor hat ONLY!
Save 70% of consumables cost!



www.scs-bicycle.com

2018
TPE
CYCLE
SHOW

BOOTH NO.
K-0405

SUN CHANG INDUSTRY CO., LTD.
No. 75, Lane 260, Chungshan Rd., Sec.1,
Beidou, Changhua Hsien 521, Taiwan
E-mail: scs.com.tw@gmail.com

2018 TAIPEI CYCLE SHOW
Booth NO. K1205

ASHIMA
Without Limit




AC03-2



AU51



AU52



ARO-18



AD 0107



AD 0707

ASHIMA LTD.

Add No. 176 Bao Bu Road, Bao Bu Li Changhua 50089 Taiwan

Tel:886-4-7260496 Fax:886-4-7260638

E-mail:ashima.twn@msa.hinet.net


Ashima...Knowing you're in control, means you can really let go...

BARADINE

2018 TAIPEI CYCLE SHOW
Booth NO. J0930



MTB-950E

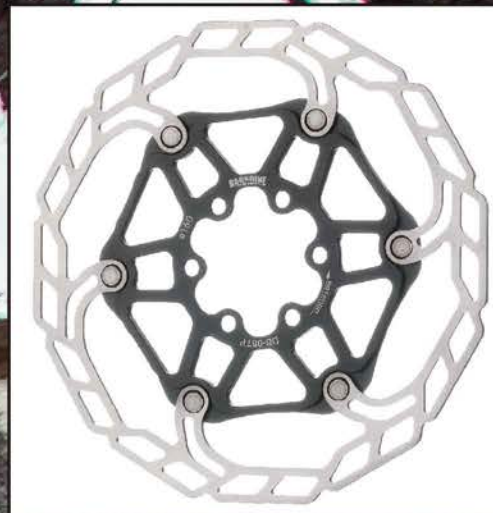

DB- 08TP



PM-PM-180

BARADINE RUBBER INDUSTRIAL CO., LTD.

No. 377, Punel St., Yenhe Li, Changhua 50064, Taiwan

TEL: 886-4-7112650

FAX: 886-4-7120839

E-mail: baradine@ms25.hinet.net

MTB & Canti-brake & V-Brake Pads



SCS-900V
Length: 60mm
For V-brake &
Canti-brake

SCS-909V (909T)
Length: 68mm
For V-brake &
Canti-brake

SCS-913V
Length: 60mm
For V-brake &
Canti-brake

SCS-93V
Length: 70mm
For V-brake &
Canti-brake &
MTB series

SCS-919V
Length: 70mm
For V-brake &
Canti-brake &
MTB series

SCS-921V
Length: 60mm
For V-brake &
Canti-brake &
MTB series

SCS-947V (947T)
Length: 70mm
For V-brake &
Canti-brake

SCS-949V (947T)
Length: 70mm
For V-brake &
V-BRAKE

SCS-900H (900P)
Length: 70mm
For V-brake &
Canti-brake

SCS-909H (909P)
Length: 68mm
For V-brake &
Canti-brake

SCS-913H
Length: 60mm
For V-brake &
Canti-brake

SCS-169P
Length: 48mm
SCS-168P
Length: 53mm
For V-brake &
Canti-brake &
MTB series

SCS-901H
Length: 60mm
For V-brake &
Canti-brake &
MTB series

SCS-910H
Length: 55mm
For V-brake &
Canti-brake &
MTB series

SCS-908H (908P)
Length: 70mm
For V-brake &
Canti-brake

SCS-908V (908T)
Length: 70mm
For V-brake &
V-BRAKE

>>>SHOES(PADS)MATERIAL & COLORS TO ORDER

CARTRIDGE BRAKE PADS



SCS-908XC

SCS-91BC

SCS-90C
Length: 70mm
For V-brake &
MTB series

SCS-908C

SCS-91C

SCS-93XC
Length: 70mm
For V-brake &
MTB series

SCS-933NCa

SCS-908C (908-2V)
SCS-908XC (908-2VX)
Length: 70mm
For V-brake

SCS-91BC
SCS-91C
Length: 70mm
For V-brake &
MTB series

SCS-911XC
Length: 70mm
For V-brake &
MTB series

SCS-933V
SCS-933C
Length: 70mm
For V-brake &
MTB series

SCS-91NCb

>>>SHOES(PADS)MATERIAL & COLORS TO ORDER

REPLACEMENT PADS



93WR

933R

91R

917R

911R

908R

90R

453R

411R

403R

456R

F91R

F911R

Length: 70 mm

Length: 55 mm

Length: 70 mm

>>>PADS MATERIAL & COLORS TO ORDER

MATERIAL OPTIONS: CPSC/ CPSIA/ AW/ EN/ ISO4210/ DIN
more information on: www.scs-bicycle.com



Racing Bike & Caliper Brake Pads



SCS-925M
Length: 50mm

SCS-605AB
Length: 55mm

NEW SCS-910MX
Length: 50mm

SCS-MA214
DIN Plus Rubber/material
Best brake power

Angle Adjustable Function 27°



Red is environmental friendly PU Resin



SCS-MA451A
Angle Adjustable Function 27°



451A7C 467A 451A
Length: 50mm
For caliper-road & BMX series
Shoes(pads) material to order



451MX



SCS-100V SCS-101V
Length: 65mm
For caliper-road & BMX series



SCS-N199 SCS-N207
Length: 40mm
For caliper-city/touring series



SCS-P400
Length: 45mm
For caliper-city/touring series



SCS-N203
Length: 40mm
For Canti-brake & BMX series



169MX 300MX 399MX
Length: 48mm, 46mm
For caliper-road & BMX series
Shoes(pads) material to order



178N 199N 203N 205N 207N 214N
Length: 40mm
For caliper-city & touring series
Shoes(pads) material & color to order

National Flag Shoes



SCS-F911BC SCS-F911XC
Length: 70 mm



SCS-F91V
Length: 70 mm



SCS-F613AB
Length: 55 mm



SCS-459AB
Length: 55 mm



SCS-908V7C SCS-917XC

SCS-908V7C SCS-917XC
Length: 70mm
For V-brake Cartridge-type



SCS-909V7C SCS-957V

SCS-909V7C SCS-957V
Length: 68mm
For Canti-brake & Vbrake
Shoes material to order



SCS-91V
Length: 70 mm



SCS-453A SCS-456A
Length: 55 mm

MATERIAL OPTIONS: CPSC/ CPSIA/ AW/ EN/ ISO4210/ DIN
more information on: www.scs-bicycle.com

DISC BRAKE SYSTEM

SCS

DELUXE

Hydraulic Hose



H39si	H18bk
H30ga	H17wh
H20ga	H16pi
H29si	H15bu
H25bu	H14gn
H23ye	H13ye
H26pi	H12or
H21re	H11re

Hydraulic Parts



Disc Adapter



Brake Rotor



Hydraulic Fluid



SHIMANO

SDP-61S Shimano XT BR-M755
SDP-62S Shimano BR-M555/C-901
SDP-63S Shimano M525/515/475/
C501/C601/Tektro

SDP-64S Shimano XTR M965/M966/
XT2004/Saint/Hone
SDP-65S Shimano New Saint
SDP-66S Shimano XTR 2012



MAGURA

SDP-11M MAGURA Louise-2002
SDP-12M MAGURA clara/Louise-2003
SDP-13M MAGURA Gustav M
SDP-14M MAGURA Julie
SDP-15M MAGURA Marta
SDP-16M MAGURA Louise
SDP-17M MAGURA MT2/MT4/MT6/MT8
SDP-18M MAGURA MT7
SDP-19M MAGURA MT5



AVID

SDP-25A Avid Juicy 7/5/BB7
SDP-27A Avid BB5
SDP-28A Avid CODE 4-piston
SDP-29A Avid Elixir series, XX.
SDP-30A Avid code R
SDP-31A Avid XO Trail
SDP-32A Avid DB1/DB3/DB5 hydraulic
SDP-33A Avid road RED 22/5-700 hydraulic



FORMULA / TEKTRO

SDP-31F Formula B4
SDP-32F Formula ORO
SDP-33F Formula the one/R1
SDP-70T Tektro IOX/Lyra
SDP-71T Tektro IO
SDP-73T Tektro Dorado e-bike



HAYES

SDP-21H Hayes & Promax
SDP-22H Hayes MX-2/Sole
SDP-23H Hayes El Camino
SDP-25H Hayes Stroker Ace
SDP-26H Hayes Stroker
SDP-27H Hayes Ryde
SDP-28H Hayes PRIME
SDP-22S HAYES MX-2/MX-3/MX-4/MX-5



MORE BRANDS

SDP-41C Cannondale Coda
SDP-57G Giant MPH2001 ~
SDP-73S SR hydraulic
SDP-74S SR mechanical / Tektro
SDP-75D Dia-tech Anchor/Armor
SDP-76J Joy-tech
SDP-77Z Zoom / SnG
SDP-72P Promax dsk-400,601
SDP-76Q Quad / Clarks
SDP-78R RST-DX



HOPE

SDP-51H Hope C2/Giant 2000
SDP-52H Hope momo mini
SDP-53H Hope momo 6ti
SDP-54H Hope M4
SDP-55H Hope XC 4-piston
SDP-56H Hope mini
SDP-58H Hope moto V2
SDP-59H Hope moto trail
SDP-60H Hope tech V2
SDP-61H Hope V4 brake
SDP-62H Hope Tech M4



MATERIAL OPTIONS: M1 / M2 / M3 / M4 / M5

More information on: www.scs-bicycle.com

SCS
DELUXE



台灣精品
TAIWAN EXCELLENCE



**NO MATTER HOW FAST YOU RIDE,
SCS ALWAYS CAN CATCH YOU.**

SCS carbon and alloy brake shoes in dry and wet performance is superior than most of brands.



SUN CHANG INDUSTRY CO., LTD

No.75, Lane 260, Chungshan Rd.,
Sec.1, Beidou, Changhua 521, Taiwan
Tel: + 8 8 6 - 4 - 8 8 7 4 7 1 3
Fax: + 8 8 6 - 4 - 8 8 8 8 5 2 8
Website: www.scs-bicycle.com
E-mail: scs.com.tw@gmail.com



MECHANICAL SYSTEM

ALLIGATOR®
www.alligatorcables.com

INNER CABLE

100 Pcs/Volume Box

20 Cards/Display Box



THE BEST CABLE IN THE WORLD 31-STRAND SUPERIOR SHINE INNER CABLE




True Gold Fears No Fire!

HOT

Softer, Stronger,
Smoother, More stable,
Eco-friendly



COLOR OUTER HOUSING



30 Mts volume box

HOT
Silver Star - Eco-friendly Cable Housing

HOT
Super Light - Fiber Glass
Light-Weight Shift housing



HOT



THE LIGHTEST CABLE HOUSING IN THE WORLD ALLIGATORILINK™

- > Silver, Gold, Black, Red, Blue, Green, Lake Green
- > 4mm for shift, 5mm for brake, 6mm for motorcycle.
- > INTERLINK™ technology for 100% water-proof and dust-proof.
- > Maximum angle protection.
- > Special high-tech aluminum materials, 50% lighter than regular housing.
- > Compressionless for smoother and more accurate control.
- > Optimized for high performance racing.

SYNCHRON COLOR ROAD BIKE CALIPER

- > Unique design to make the outer casing motionless while the lever is pulling, such special design can help the brake system to move simultaneously, thus, can increase the brake power.
- > silver, red, gold, orange are available.

NEW



LY-CBFR01-BS LY-CBFR01-BO LY-CBFR01-BG


PORTABLE MELTING CUTTER

- > Cutting inner cable in 2 sec.
- > Naturally form a solid cable end.
- > Portable, easy to use it everywhere.
- > Don't need cable end cap anymore.
- > You won't get hurt and scratch.



UNIVERSAL BRAKE SHOES

replacement for Shimano road brake



DIY PACKAGE



RD-300UI

RD-300UIC

RD-300UICA

SILICONE HOUSING SHIELD

SPIRAL TYPE

- DHPR-13-YW DHPR-13-RD
- DHPR-13-GR DHPR-13-WH

SAWTOOTH TYPE

- DHPR-12-OR DHPR-12-PK
- DHPR-12-BL DHPR-12-BK

MINI TYPE **NEW**

suitable for 4mm & 5mm housing

- DHPR-20-BK DHPR-20-RD
- DHPR-20-WH DHPR-20-TR

REUSABLE END CAP

No need tool, reusable, luxury and high quality end caps.

LY-IPA06 FOR BRAKE

LY-IPA07 FOR SHIFT





HYDRAULIC SYSTEM

5mm ULTIMATE™ HOSE KIT

HOT

Polymer underlay re-inforced with braided polyester fiber
Compatible for, Magura, Shimano, Avid, Formula



HYDRAULIC HOSE FITTINGS

Replacement fittings for workshop in original forms for Magura, Shimano, Avid, Hayes and Formula



HK-COM011

NEW TURBO COOLING DISC BRAKE PADS

HOT

- > Made in Taiwan, engineered in Germany, designed in Italy.
- > 40% Lighter weight, 25~30% Lower temperature than regular pads.



ANCHOR HYDRAULIC HOSE CUTTER

New design for ergonomics. Easier and quicker to have flat surface after cutting.



HK-CUT005-DIY

END PRESS

Tools to combine hose and fittings easily.



DIAMOND 2P Floating Rotor

NEW



- > Patented floating technology with clever connecting design which reserve appropriate space for heat dissipation, and also greatly disperse internal stress for safer, durable performance.
- > SUS410 Stainless Steel.
- 160mm 116g (6 colors)

DIAMOND Light-Weight Rotor



HK-R49
140mm 56g
HK-R50
160mm 70g
HK-R48
180mm 82g



E-BIKE 220 mm DISC ROTOR, & DISC ADAPTOR

NEW

- > Durable design for E-bike.
- > High-grade SUS 410 stainless steel.

HK-R85-DIY
220mm 202g
HK-XQ08-DIY
28g



HEAT DISSIPATION DISC BRAKE ROTOR

- > Thin alloy plate attached to help dissipate the heat, no need to worry about the overheat.
- > High-grade SUS 410 stainless steel.


NEW



HK-R80BK-DIY
160mm 136g



HK-R80BL-DIY
160mm 136g



HK-R80RD-DIY
160mm 136g

EXTRAME CARBON DISC BRAKE PADS




HOT

- > Contains HIGH % Carbon fiber.
- > Prevent heat exhaustion and will have stable braking Performance.



DISC BRAKE PADS

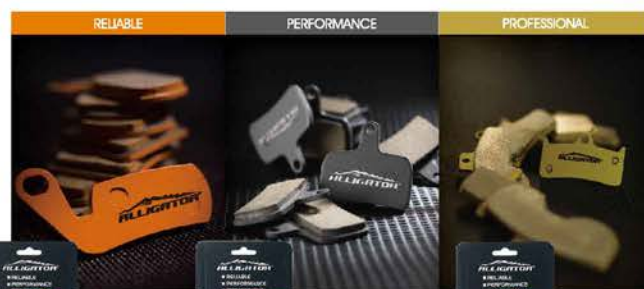

RELIABLE
Organic



PERFORMANCE
Semi-Metallic



PROFESSIONAL
Ceramic Sintered

COLOR DISC BRAKE ROTOR



STARLITE



CROWN



WIND CUTTER



I WAVE



ARIES



DIAMOND 2P




UNEX

MAKE YOU BETTER

for complete information please check our website at
WWW.UNEXCABLES.COM

CONTROL CABLES & PARTS



THERMO DISSIPATOR™
Dual compounds pads for all well-known disc brake systems

ORGANIC DISC BRAKE PADS



CARBON BRACKET **HOT**

100% carbon, lightweight.



UN-BC1 UN-BC2 UN-BC3



ULTRA CABLE SET

- HOT**
- >Kevlar® reinforced housing
- >Strengthened by stainless steel braiding
- >Stainless steel ultra-glide P.T.F.E. coated
- >Double jacketed for all-weatherproof
- >Polymer liner for frictionless function



HYPER CABLE SET

- >Strengthened by stainless steel braiding
- >Stainless steel dyno-glide P.T.F.E. coated
- >Double jacketed for all-weather proofing
- >Polymer liner for frictionless function

HYDRAULIC HOSE KIT **HOT**

Ultra hose

5mm Suitable for, Magura, Shimano, Avid, Formula

Anti scratch transparent UV cover

Kevlar® reinforced fiber



CENTER LOCK ADAPTOR & LOCK RING



UN-CLA01



GRIPPERS

Hydraulic hoses and housing holder.
Fits up to 6mm hose.



UN-10



UN-26



UN-51



UN-52

ARROW COLOR DISC



WHITE



RED



BLUE



BLACK



Inline Adjuster **HOT**

- > Adjustment for derailleur to improve the accuracy
- > Suitable for the housing between 4mm to 5mm




HOUSING SHIELD

UN-HPR11-BL/BK/RD/WH 4mm
UN-HPR12-BL/BK/RD/WH 5mm



VALVE CAP

UN-VC01
UN-VC02



←30Mts Volume Box
CABLE JACKETS
ULTRA / HYPER



←100pcs Volume Box
INNER CABLE
Performance cable

RUBAR®

SHADOW ARES 48



1450g



HUBS & WHEELSETS



跑車碟煞



ACHIMAY ENTERPRISE CO.,LTD.

No. 486-8, Fuya Rd., Xitun Dist., Taichung City 407,
Taiwan

TEL:886-4-24633258 FAX:886-4-24629911
E-mail:achimay.tw@msa.hinet.net



FORMULA ENGINEERING INC.

807, Feng Gong Rd., Sheng Kang Dist., Taichung City, Taiwan.

Tel:886-4-25202755 Fax:886-4-25293478

www.formulahubs.com E-mail:marketing@formulahubs.com



F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
EHL-148S	R	4SB	28 / 32	148mm	12mm	n/a 390g
EHL-148A	R	4SB	28 / 32	148mm	12mm	n/a 335g
EHL-1481	R	4SB	28 / 32	148mm	12mm	n/a 360g
EHL-1482	R	4SB	28 / 32	148mm	12mm	n/a 330g

* EHL-1481 for Sram XD system

F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
ECT-148S	R	4SB	28 / 32	148mm	12mm	n/a 375g
ECT-148A	R	4SB	28 / 32	148mm	12mm	n/a 320g
ECT-1481	R	4SB	28 / 32	148mm	12mm	n/a 340g

* ECT-1481 for Sram XD system

Boost Hub - 6 bolt



F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
DC-711	F	SB	28 / 32	110mm	15mm	n/a 185g
DHT-148S	R	4SB	28 / 32	148mm	12mm	n/a 395g
DHT-1481	R	4SB	28 / 32	148mm	12mm	n/a 360g

*DHT1481 for Sram XD system

F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
TD-711	F	SB	28 / 32	110mm	15mm	n/a 133g
TD-148S	R	4SB	28 / 32	148mm	12mm	n/a 310g
TD-1481	R	4SB	28 / 32	148mm	12mm	n/a 290g

*TD1481 for Sram XD system

Boost Hub - Center lock



F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
CL-811	F	SB	28 / 32	110mm	15mm	n/a 125g
CL-148S	R	4SB	28 / 32	148mm	12mm	n/a 360g
CL-1481	R	4SB	28 / 32	148mm	12mm	n/a 295g

*CL1481 for Sram XD system

F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
TC-711	F	SB	28	110mm	15mm	n/a 125g
TC-148S	R	4SB	28	148mm	12mm	n/a 310g
TC-1481	R	4SB	28	148mm	12mm	n/a 295g

TC1481 for Sram XD system

Road Disc



F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
RX-812	F	SB	24 / 28 / 32	100mm	12mm	n/a 138g
RX-300	R	4SB	24 / 28 / 32	142mm	12mm	n/a 300g
RX-301	R	4SB	24 / 28 / 32	142mm	12mm	n/a 300g

*RX301 for Sram XD system

F / R	Mechanism	Spoke Count	O.L.D.	Axle Length	QR	Weight
CL-712	F	SB	24 / 28 / 32	100mm	12mm	n/a 150g
RXC-142S	R	4SB	24 / 28 / 32	142mm	12mm	n/a 355g
RXC-142A	R	4SB	24 / 28 / 32	142mm	12mm	n/a 305g

THROUGH AXLE SYSTEM

Available for FX/ SR/ SH/ SY/ DT



For MTB/fatbike



Model G92

Model G22

360° Lever Adjustment



For Roadbike



Model G87



Model FH

Model FB



Model G60



Model G62



INTERNAL CAM SYSTEM



Model F60-00AF/ R60-00AF
Weight:58g/ 63g



Model F66-00AF/ R66-00AF
Weight:52g/ 57g



Model F05-00AF/ R05-00AF
Weight:63g/ 68g



LIGHT WEIGHT SYSTEM



Ti



Model F52-AVAJ/ R52-AVAJ
Weight:26g/ 28g



Ti



Model F58-AVAM/ R58-AVAM
Weight:25g/ 27g



Ti



Model F78-AVAJ/ R78-AVAJ
Weight:26g/ 28g

INTEGRAL SYSTEM



Model F42-0004/ R42-0004
Weight:57g/ 61g



Model F46-0004/ R46-0004
Weight:58g/ 62g



Model F47-00AG/ R47-00AG
Weight:57g/ 61g

ANTI-THEFT SYSTEM



Model F21-AYAK/ R21-AYAK
Weight:36g/ 39g



Model F11-ABAK/ R11-ABAK
Weight:49g/ 52g



Model F31-AYAK/ R31-AYAK
Weight:38g/ 41g



FULCHEE

富錡企業股份有限公司
FUL CHEE ENT CO., LTD.

No. 26, Fong-Ming Rd., Da-Ya Dist.,
Taichung City, 42872, Taiwan
Tel: +886-4-25605818 Fax: +886-4-25605806
E-mail: skewer@fulchee.com
Http: //www.fulchee.com

MTB



MTB

MTB

MTB



DIABLO XL

AVAILABLE IN BOOST&SPEC

- TUBELESS READY
- 30MM INNER WIDTH
- 27.5" BOOST : 2,040 GRAMS/PAIR
- 29" : 2,135 GRAMS/PAIR



DEMON XL

AVAILABLE IN DOWNHILL&SUPER BOOST

- TUBELESS READY
- 30MM INNER WIDTH
- 27.5" : 2,100 GRAMS/PAIR
- 27.5" SUPER BOOST : 2,115 GRAMS/PAIR
- 29" : 2,180 GRAMS/PAIR
- 29" SUPER BOOST : 2,170 GRAMS/PAIR



CRISP

ALL NEW SINGLE SPEED SPECIFIC

- COLOR : GREY OR BLACK
- TUBELESS READY
- 26MM INNER WIDTH
- 26" : 2,100 GRAMS/PAIR



AMERICA

ASIA

EUROPE

NOVATEC
QUALITY • PERFORMANCE • RELIABILITY

NOVATECWHEELS U.S.A. (Georgia)
6580 Wolfport Rd Robin Gap, GA 30568, USA
TEL : +1-951-225-4514
E-MAIL : CUSTOMERSERVICE@NOVATECUSA.NET

NOVATECWHEELS TAIWAN (HQ)
No.9, Ln. 462, Sec. 4, Changping Rd., Daya Dist., Taichung City 428, Taiwan
TEL : +886-4-2566-8888 FAX : +886-4-2566-1185
E-MAIL : SERVICE@NOVATECWHEELS.COM

NOVATECWHEELS EUROPE (Slovakia)
Sadova 2719/3C, 905 01 Senica, Slovakia
TEL : +421-948-72-95-99
E-MAIL : INFO@NOVATECWHEELS.EU

ROAD



R3

FULL CARBON WITH HIGH TG RESIN RIM

- TUBELESS READY
- 38MM RIM TYPE DEPTH
- 27.4MM WIDTH
- 1,610 GRAMS/PAIR



R5

FULL CARBON WITH HIGH TG RESIN

- TUBELESS READY
- 50MM RIM TYPE DEPTH
- 27.8MM WIDTH
- 1,775 GRAMS/PAIR



R3 DISC

FULL CARBON WITH HIGH TG RESIN
ASYMMETRIC RIM

- TUBELESS READY
- 38MM RIM TYPE DEPTH
- 27.8MM WIDTH
- 1,630GRAMS/PAIR



R5 DISC

FULL CARBON WITH HIGH TG RESIN

- TUBELESS READY
- 50MM RIM TYPE DEPTH
- 27.8MM WIDTH
- 1,775 GRAMS/PAIR



CXD DISC

NEW WIDE PROFILE SUPERLIGHT ALLOY RIM

- TUBELESS READY
- DISC BRAKE COMPATIBLE HUBS FIT
QR12/15MM (F), QR / 12X142MM (R)
- 24MM RIM TYPE DEPTH
- 24.4MM WIDTH
- 1,615 GRAMS/PAIR



JETFLY DISC

NEW WIDE PROFILE SUPERLIGHT ALLOY RIM

- TUBELESS READY
- DISC BRAKE COMPATIBLE HUBS FIT
QR12/15MM (F), QR / 12X142MM (R)
- 31.8MM RIM TYPE DEPTH
- 24.4MM WIDTH
- 1,615 GRAMS/PAIR

N

NOVATEC
QUALITY • PERFORMANCE • RELIABILITY

AMERICA

NOVATECWHEELS U.S.A. (Georgia)
6580 Wolfcreek Rd Rabun Gap, GA 30568, USA
TEL : +1-951-225-4514
E-MAIL : CUSTOMERSERVICE@NOVATECUSA.NET

ASIA

NOVATECWHEELS TAIWAN (HQ)
No.9, Ln. 462, Sec. 4, Changping Rd., Daya Dist., Taichung City 428, Taiwan
TEL : +886-4-2566-8888 FAX : +886-4-2566-1185
E-MAIL : SERVICE@NOVATECWHEELS.COM

EUROPE

NOVATECWHEELS EUROPE (Slovakia)
Sadova 2719/3C, 905 01 Senica, Slovakia
TEL : +421-948-722-96-99
E-MAIL : INFO@NOVATECWHEELS.EU



ENDURO TA

SP-PRO



XDS641SB-B15
\\ WEIGHT 170g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28
\\ O.L.D 110
\\ AXLE 15

ENDURO TA

S-PRO



D932SB-B12
\\ WEIGHT 552g
\\ SPOKE HOLES 32
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 6X6

ENDURO TA

SP-PRO



XDS642SB-B12
\\ WEIGHT 318g
\\ SEALED BEARING 4
\\ SPOKE HOLES 28
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 6

ENDURO TA

S-TEAM



D791SB-B15
\\ WEIGHT 174g
\\ SPOKE HOLES 32
\\ O.L.D 148
\\ AXLE 12

ENDURO TA

SL-PRO⁺



XD601SB-B15
\\ WEIGHT 202g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28 32
\\ O.L.D 110
\\ AXLE 15

ENDURO TA

S-ELITE



D951SB-B15
\\ WEIGHT 196g
\\ SEALED BEARING 2
\\ SPOKE HOLES 32
\\ O.L.D 110
\\ AXLE 15

ENDURO TA

SL-PRO⁺



XD602SB-B12
\\ WEIGHT 342g
\\ SEALED BEARING 4
\\ SPOKE HOLES 28 32
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 6

ENDURO TA

S-ELITE



D162SB-SL-B12
\\ WEIGHT 491g
\\ SEALED BEARING 2
\\ SPOKE HOLES 32
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 5

ENDURO TA

SL-PRO



XD641SB-B15
\\ WEIGHT 196g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28 32
\\ O.L.D 110
\\ AXLE 15

SUPER BOOST

S-TEAM



D951SB-SL-B20
\\ WEIGHT 220g
\\ SEALED BEARING 2
\\ SPOKE HOLES 32
\\ O.L.D 110
\\ AXLE 20

ENDURO TA

SL-PRO



XD642SB-B12
\\ WEIGHT 335g
\\ SEALED BEARING 4
\\ SPOKE HOLES 28 32
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 6

SUPER BOOST

S-TEAM



DP952SB
\\ WEIGHT 465g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28 32
\\ O.L.D 157
\\ AXLE 12
\\ PAWLS 5



GLOBAL
OFFICE

NOVATECWHEELS TAIWAN (HQ)
No.9, Ln. 462, Sec. 4, Changping Rd., Daya Dist., Taichung City 428, Taiwan
TEL : +886-4-2566-8888 FAX : +886-4-2566-1185
E-MAIL : SERVICE@NOVATECWHEELS.COM

NOVATECWHEELS U.S.A (Georgia)
6580 Wolfcreek Rd Rabun Gap, GA 30568, USA
TEL : +1-951-225-4514
E-MAIL : CUSTOMERSERVICE@NOVATECUSA.NET

NOVATECWHEELS EUROPE (Slovakia)
Sadova 2719/3C, 905 01 Senica, Slovakia
TEL : +421-948-72-96-99
E-MAIL : INFO@NOVATECWHEELS.EU



ROAD

SP-PRO⁺



AS61CB
\\ WEIGHT 72g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20
\\ O.L.D 100
\\ AXLE 9

ROAD

SL-TEAM



A291SB
\\ WEIGHT 78g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20 24
\\ O.L.D 100
\\ AXLE 9

ROAD

SP-PRO⁺



FS62CB-11S
\\ WEIGHT 215g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24
\\ O.L.D 130
\\ AXLE 10
\\ PAWLS 4

ROAD

SL-TEAM



F482SB-11S
\\ WEIGHT 238g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24 28
\\ O.L.D 130
\\ AXLE 10
\\ PAWLS 4

ROAD

SP-PRO



AS511SB
\\ WEIGHT 77g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20
\\ O.L.D 100
\\ AXLE 9

ROAD

S-TEAM



A171SB
\\ WEIGHT 113g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20 24 28
\\ O.L.D 100
\\ AXLE 9

ROAD

SP-PRO



FS522SB-11S
\\ WEIGHT 219g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24
\\ O.L.D 130
\\ AXLE 10
\\ PAWLS 4

ROAD

S-TEAM



F172SB-11S
\\ WEIGHT 272g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24 28
\\ O.L.D 130
\\ AXLE 10X140
\\ PAWLS 3

ROAD

SL-PRO



A291SB-SL
\\ WEIGHT 60g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20 24 28
\\ O.L.D 100
\\ AXLE 9

ROAD

S-ELITE



A171SBT
\\ WEIGHT 173g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20 24 28 32
\\ O.L.D 100
\\ AXLE 9

ROAD

SL-PRO



F482SB-SL-11S
\\ WEIGHT 228g
\\ SEALED BEARING 4
\\ SPOKE HOLES 20 24 28 32
\\ O.L.D 130
\\ AXLE 10
\\ PAWLS 4

ROAD

S-ELITE



F172TSB-11S
\\ WEIGHT 215g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24 28 32
\\ O.L.D 130
\\ AXLE 10
\\ PAWLS 2

HUBS & WHEELSETS



MTB

S-TEAM



D871SB
\\ WEIGHT 220g
\\ SEALED BEARING 2
\\ SPOKE HOLES 32
\\ O.L.D 100
\\ AXLE 9

MTB

S-ELITE



D471SBT-B5
\\ WEIGHT 282g
\\ SEALED BEARING 2
\\ SPOKE HOLES 24 28 32
\\ O.L.D 110
\\ AXLE 9

MTB

S-TEAM



D872SB
\\ WEIGHT 473g
\\ SEALED BEARING 4
\\ SPOKE HOLES 32 36
\\ O.L.D 135
\\ AXLE 10
\\ PAWLS 3

MTB

S-ELITE



D472TSBT-B5
\\ WEIGHT 489g
\\ SEALED BEARING 2
\\ SPOKE HOLES 24 28 32
\\ O.L.D 141
\\ AXLE 10
\\ PAWLS 2

MTB

S-ELITE



D471SBT-SC
\\ WEIGHT 279g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28 32
\\ O.L.D 136
\\ AXLE 10

MTB

S-CLUB



D871DSE-B5
\\ WEIGHT 301g
\\ SPOKE HOLES 32 36
\\ O.L.D 135
\\ AXLE 10

MTB

S-ELITE



D472TSBT-SC
\\ WEIGHT 480g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28 32 36
\\ O.L.D 135
\\ AXLE 10
\\ PAWLS 2

MTB

S-CLUB



D872TSE-B5
\\ WEIGHT 471g
\\ SPOKE HOLES 32
\\ O.L.D 135
\\ AXLE 10
\\ PAWLS 2

MTB

S-CLUB



D871DSE
\\ WEIGHT 283g
\\ SPOKE HOLES 32
\\ O.L.D 100
\\ AXLE 10

E-MTB

S-CLUB



D951-B15
\\ WEIGHT 320g
\\ SPOKE HOLES 32
\\ O.L.D 110
\\ AXLE 15

MTB

S-CLUB



D872TSE
\\ WEIGHT 471g
\\ SPOKE HOLES 32
\\ O.L.D 135
\\ AXLE 10
\\ PAWLS 2

E-MTB

S-CLUB



D952TSE-B12-11S
\\ WEIGHT 403g
\\ SPOKE HOLES 32
\\ O.L.D 148
\\ AXLE 12
\\ PAWLS 2



GLOBAL
OFFICE

NOVATECWHEELS TAIWAN (HQ)
No.9, Ln. 462, Sec. 4, Changping Rd., Daya Dist., Taichung City 428, Taiwan
TEL : +886-4-2566-8888 FAX : +886-4-2566-1185
E-MAIL : SERVICE@NOVATECWHEELS.COM

NOVATECWHEELS U.S.A (Georgia)
6580 Wolford Rd Rabun Gap, GA 30568,USA
TEL : +1-951-225-4514
E-MAIL : CUSTOMERSERVICE@NOVATECUSA.NET

NOVATECWHEELS EUROPE (Slovakia)
Sadova 2719/3C, 905 01 Senica, Slovakia
TEL : +421-948-72-96-99
E-MAIL : INFO@NOVATECWHEELS.EU



ROAD DISC

SP-PRO⁺



D411CB-12
\\ WEIGHT 79g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20
\\ O.L.D 100
\\ AXLE 9

ROAD DISC

S-ELITE



D981SB-12
\\ WEIGHT 205g
\\ SEALED BEARING 2
\\ SPOKE HOLES 24
\\ O.L.D 100
\\ AXLE 12

ROAD DISC

SP-PRO⁺



D412CB-X12-11S
\\ WEIGHT 229g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24 28
\\ O.L.D 142
\\ AXLE 12
\\ PAWLS 4

ROAD DISC

S-ELITE



D952SB-X12-11S
\\ WEIGHT 484g
\\ SEALED BEARING 2
\\ SPOKE HOLES 28
\\ O.L.D 142
\\ AXLE 12
\\ PAWLS 5

ROAD DISC

SP-PRO



D411SB-12
\\ WEIGHT 85g
\\ SEALED BEARING 2
\\ SPOKE HOLES 24 28
\\ O.L.D 100
\\ AXLE 12

ROAD DISC

S-CLUB



D981-12
\\ WEIGHT 223g
\\ SEALED BEARING 2
\\ SPOKE HOLES 20 24 28
\\ O.L.D 100
\\ AXLE 9

ROAD DISC

SP-PRO



D412SB-X12-11S
\\ WEIGHT 238g
\\ SEALED BEARING 4
\\ SPOKE HOLES 24 28
\\ O.L.D 142
\\ AXLE 12
\\ PAWLS 4

ROAD DISC

S-CLUB



D982TSE-X12
\\ WEIGHT 411g
\\ SPOKE HOLES 28
\\ O.L.D 142
\\ AXLE 12
\\ PAWLS 2

ROAD DISC

S-TEAM



D791SB-12
\\ WEIGHT 163g
\\ SEALED BEARING 2
\\ SPOKE HOLES 24
\\ O.L.D 100
\\ AXLE 12

ROAD

S-CLUB



A171DSE
\\ WEIGHT 151g
\\ SPOKE HOLES 20 24 28
\\ O.L.D 100
\\ AXLE 9

ROAD DISC

S-TEAM



D792SB-X12
\\ WEIGHT 287g
\\ SEALED BEARING 4
\\ SPOKE HOLES 28
\\ O.L.D 142
\\ AXLE 12
\\ PAWLS 4

ROAD

S-CLUB



F172TSE-11S
\\ WEIGHT 412g
\\ SPOKE HOLES 24 28
\\ O.L.D 130 / 135
\\ AXLE 10
\\ PAWLS 2

HUBS & WHEELSETS



DR-140F/DR-140R

"S" Type

Spoke holes: 14G x 28H
Axle material: AL7075-T6
Front: HH15 x 100mm
Rear: HH12 x 142mm
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075, 3-pawls
Dust cap: Alloy
Weight: F: 138g / R: 278g
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
Produced in: Taiwan



DR-819F/DR-819R

Spoke holes: 14G x 28H / 14G x 28H
Axle material: AL7075
Front: HH15 x 100mm (OPT: HH12 QR Adapter)
Rear: HH12 x 148mm
Hub shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075 (Shimano type & XD type optional)
Dust cap: Alloy
Weight: F: 142.5g / R: 247g (Shimano type)
242g (XD type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



DR-141F/DR-141R

"S" Type, BOOST

Spoke holes: 14G x 28H
Axle material: AL7075-T6
Front: HH15 x 100mm
Rear: HH12 x 148mm
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075, 3-pawls
Dust cap: Alloy
Weight: F: 144g / R: 284g
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
Produced in: Taiwan



DR-817F/DR-817R

MTB "S" Type

Spoke holes: 14G x 28H / 14G x 28H
Axle material: AL7075
Front: HH15 x 100mm (OPT: HH12 QR Adapter)
Rear: HH12 x 142mm (OPT: HH12-135 QR Adapter)
Hub shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075 (Shimano type & XD type optional)
Dust cap: Alloy
Weight: F: 140g / R: 242g (Shimano type)
233g (XD type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



PX-130F/PX-130R

Spoke holes: 14G x 24H / 28H
Axle material: F: AL7075-T6 Hollow Axle with 5mm Chromoly Locking Skewer
R: Male / Female Bolt System (AL7075-T6) Hollow Axle & Chromoly Bolts
Front: 100mm
Rear: 110mm
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: Steel, 3-pawls
Dust cap: Alloy
Spacer: AL6061, 10mm
Lockring: Chromoly Steel
Weight: PX-130F: 148g / PX-130R: 404g
Finish: Black / Red / Gold / Blue / Anodized color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
Produced in: Taiwan



DR-816F/DR-816R

MTB "S" Type

Spoke holes: 14G x 28H / 14G x 28H
Axle material: AL7075
Front: HH15 x 100mm (OPT: HH12 QR Adapter)
Rear: HH12 x 142mm (OPT: TA135 QR Adapter)
Hub shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075 (Shimano type & XD type optional)
Dust cap: Alloy
Weight: F: 129g / R: 239g (Shimano type)
230g (XD type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



DR-922F/DR-922R

Spoke holes: 14G x 28H / 32H / 36H
Axle material: AL7075-T6
Front: HH-15 x O.L.D. 110 (Thru Axle)
Rear: HH-12 x O.L.D. 148 (Thru Axle)
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: Steel, 3-pawls
Dust cap: Alloy
Weight: DR-922F: 196.8g / DR-922R: 359.8g
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
Produced in: Taiwan



DR-815F/DR-815R

ROAD DISC "S" Type

Spoke holes: 14G x 24H / 14G x 24H
Axle material: AL7075
Front: HH15 x 100mm (OPT: HH12 QR Adapter)
Rear: HH12 x 142mm (OPT: TA135 QR Adapter)
Hub Shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075 (Shimano type & XD type optional)
Dust cap: Alloy
Weight: F: 137g / R: 242g (Shimano type)
233g (XD type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



DR-921F/DR-921R

Spoke holes: 14G x 28H / 32H / 36H
Axle material: F: AL7075-T6 / R: AL7075-T6
Front: Ø9 x 108mm x O.L.D. 100 (QR)
HH-15 x O.L.D. 100 (Thru Axle)
Ø10 x 145mm x O.L.D. 135 (QR)
HH-12 x O.L.D. 142 (Thru Axle)
Rear: HH-12 x O.L.D. 142 (Thru Axle)
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: Steel, 3-pawls
Dust cap: Alloy
Weight: DR-921F (QR): 210g / DR-921F (HH-15): 205g
DR-921R (QR): 374g / DR-921R (HH-12): 369g
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
Produced in: Taiwan



DR-813F/DR-813R

BOOST "S" Type

Spoke holes: 14G x 28H / 14G x 28H
Axle material: AL7075
Front: HH15 x 110mm (OPT: HH12 QR Adapter)
Rear: HH12 x 148mm
Hub shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearing)
Cassette body: AL7075 (Shimano type & XD type optional)
Dust cap: Alloy
Weight: F: 194g / R: 282g (Shimano type)
273g (XD type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



TEL: 886-4-7382121
FAX: 886-4-7384605
EMAIL: saleechi@leechi.com.tw

PROMAXCOMPONENTS.COM

PROMAX



DR-812F/DR-812R

Spoke holes: 14G, F: 28H / R: 28H
Front: F: AL7075-T6 / R: AL7075-T6
Ø9 x 108mm x O.L.D. 100 (QR)
HH-15 x O.L.D. 100 (Thru Axle)
Rear: Ø10 x 145mm x O.L.D. 135 (QR)
HH-12 x O.L.D. 142 (Thru Axle)
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075, 3-pawls
Dust cap: Alloy
Weight: DR-812F (QR): 197g
DR-812F (HH-15): 195g
DR-812R (QR): 288g
DR-812R (HH-12): 285g
Finish: Black / Anodized / S.B. Color
Packing: 50pcs / ctn / F: 1.06cuf / R: 1.77cuf
Produced in: Taiwan



DB-600F/DB-600R/DB-500R

Spoke holes: 14G x 28H / 32H / 36H
Axle material: Hollow, S45C
Front: M9 x 108mm
Rear: M10 x 145mm
Rolling mechanism: Loose ball
Cassette body: Steel, 2-pawls
Weight: DB-600F: 299g
DB-600R: 489g
DB-500R: 338g
Dust cover: Rubber
Finish: Black / Silver / Anodized / S.B. color
Packing: DB-600F: 50pcs / ctn / 1.53cuf
DB-600R: 50pcs / ctn / 1.94cuf
Produced in: Taiwan



RB-318F/RB-318R/RB-318EF/ RB-318ER **UPGRADE 11SPEED**

Spoke holes: 14G, F: 20H / R: 24H / EF: 20H / ER: 24H
Front: F: AL7075-T6 / R: AL7075-T6
EF: SCM415 / ER: SCM415
Rolling mechanism: RB-318: Ball bearing (Rear: 4 Bearings)
Cassette body: RB-318E: Ball bearing
RB-318: AL7075, 3-pawls
RB-318E: Steel, 2-pawls
Dust cap: RB-318: Alloy
RB-318E: Steel
Weight: RB-318F: 134g
RB-318R: 269g
RB-318EF: 170g
RB-318ER: 420g
Finish: Black / Anodized / S.B. color
Packing: 50pcs / ctn / F: 1.24cuf / R: 1.81cuf
EF: 1.24cuf / ER: 1.81cuf
Produced in: Taiwan



NEW QR-462/QR-463

This bicycle wheel is attached by a lever-actuated mechanism that allows you to install and remove the wheel without tools. To tighten up the system, turn the lever clockwise. Depending on the frame or fork construction it may be necessary to throw the lever several times. To open the system, pull-up and turn the lever counterclockwise. Ensure that the lever is back to its normal position after every adjusting (As figure).

Material: 7075T73 (Thru Axle)
For front hub: 110mm
For rear hub: 148mm
Weight: QR-462: F: 62g / R: 70g
QR-463: F: 61g / R: 69g
Finish: Anodized Black
Packing: 100pcs / ctn / 1.16cuf
Produced in: Taiwan



RB-855F/RB-855R ROAD DISC "S" Type

Spoke holes: 14G x 16H / 14G x 21H
14G x 20H / 14G x 24H
Axle Material: AL7075-T6
Front: QR x 100mm
Rear: QR x 130mm
Hub Shell: AL6082-T6
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette: AL7075 (Shimano type & Campy type optional)
Dust cap: Alloy
Weight: F: 80g / R: 211g (Shimano type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



QR-357/QR-357F/QR-357R

Forged aluminum alloy quick release lever

Seat pin: 20 / 30 / 35mm
For front hub: 112mm
For rear hub: 149mm
Weight: 32g / 47.9g / 53.6g
Finish: Anodized colors
Packing: 250pcs / ctn / 0.66 / 1.3cuf
Produced in: Taiwan



RB-851F/RB-851R ROAD RIM "S" Type

Spoke holes: 14G x 16H / 14G x 20H
Axle material: AL7075
Front: QR x 100mm (OPT: HH12 HH15 QR Adapter)
Rear: QR x 130mm (OPT: HH12 Adapter)
Hub shell: AL6082
Rolling mechanism: Ball bearing (Rear: 4 Bearings)
Cassette body: AL7075 (Shimano type & Campy type optional)
Dust cap: Alloy
Weight: F: 130g / R: 238g (Shimano type)
Finish: Black / Silver / Anodized / S.B. color
Produced in: Taiwan



QR-207/QR-207F/QR-207R

Forged aluminum alloy quick release lever

Seat pin: 20 / 30 / 35mm
For front hub: 109 / 112 / 114mm
For rear hub: 148 / 151mm
Weight: 32g / 44g / 47g
Finish: Black / Silver
Packing: 250pcs / ctn / 0.53 / 0.87 / 1.16cuf
Produced in: Taiwan



QR-354/QR-354F/QR-354R

Aluminum alloy quick release lever

Seat pin: 20 / 30 / 35mm
For front hub: 86 / 112mm
For rear hub: 144mm
Weight: 34g / 48.9g / 53.8g
Finish: Anodized colors
Packing: 250pcs / ctn / 0.66 / 1.3cuf
Produced in: Taiwan



QR-318/QR-318F/QR-318R

Aluminum alloy quick release lever

Seat pin: 25 / 27 / 30mm
For front hub: 109 / 112 / 114mm
For rear hub: 148 / 151mm
Weight: 32g / 43g / 48g
Finish: Black / Silver
Packing: 250pcs / ctn / 0.66 / 0.87 / 1.16cuf
Produced in: Taiwan / China



DB-945F/DB-945R

Spoke holes: 14G x 28H / 32H / 36H
Axle material: F: SCM415 / R: SCM415
Front: Ø9 x 108mm x O.L.D. 100
Rear: Ø10 x 145mm x O.L.D. 135
Rolling mechanism: Ball bearing
Cassette body: Steel, 2-pawls
Weight: DB-945F: 249g
DB-945R: 439g
Finish: Black / Silver / Anodized / ED / S.B. color
Packing: F: 50pcs / ctn / 1.54cuf
R: 40pcs / ctn / 1.6cuf
Produced in: Taiwan



QR-304/QR-304F/QR-304R

Aluminum alloy quick release lever

Seat pin: 25 / 27 / 30mm
For front hub: 109 / 112 / 114mm
For rear hub: 148 / 151mm
Weight: 34g / 43g / 48g
Finish: Black / Silver
Packing: 250pcs / ctn / 0.87 / 1.16 / 1.34cuf
Produced in: Taiwan / China

ShunXin 舜新

Shun XIN CO., LTD

No.30, Ln. 530, Guangxing Rd., Taiping Dist., Taichung City 411, Taiwan

Tel: 886-4-22711688 Fax: 886-4-22711677

Executive: Mr.Chang, Ms.Hung

E-mail: mounkuang@sxmetal.com

www.sxmetal.com



US Patented : 8,573,879 B2

Taiwan Patent : M 425185

360° Fine-tuning Quick Release

Rotating adjustment mechanism

Adjustable at any angle

**Auto Invisible Handle
Pat Patent.**



Allen Key Hollow Axle

REX Ø12 AND Ø15

G12 AND G15

IH-12 AND IH-15


AH-12 AND AH-15

TA-12 Hub Axle

XD9 AND XD10

XD12 AND XD15

X12 AND X15

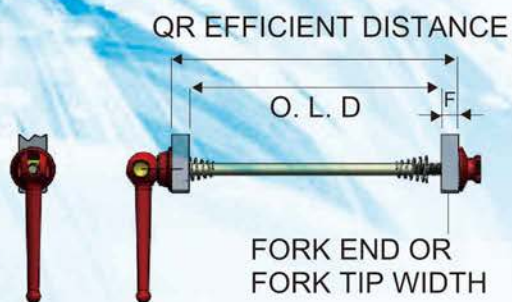

Material: Alloy / Axle: CR-MO(CP), STAINLESS, TI

F-Efficient Distance: 5mm x 108, 112, 114

R-Efficient Distance: 5mm x 143, 148, 151

ShunXin





neco

NECO TECHNOLOGY INDUSTRY CO., LTD

www.necoparts.com

Professional Bike
Parts Manufacturers



MS03F / MS03R

HUB SHELL	Alloy
AXLE MATERIAL	CR-MO
SEALED BEARING QTY	F:2 / R:4
OLD	F: 100mm / R: 135mm
PCD	58mm
SPOKE HOLES	14G×20H/24H/28H/32H/36H
WEIGHT	F: 274g/ R: 353g
FINISH	Silver & Black



MS08F / MS08R

HUB SHELL	Alloy
AXLE MATERIAL	CR-MO
SEALED BEARING QTY	F:2 / R:4
OLD	F: 100mm/ R: 135mm
PCD	58mm
SPOKE HOLES	14G×20H/24H/28H/32H/36H
WEIGHT	F:210g/ R: 341g
FINISH	Silver & Black



MS641F/MS641R


HUB SHELL	Alloy
AXLE MATERIAL	CR-MO
ROLLING SYSTEM	Loose Ball
OLD	F:100mm/R:135mm
PCD	F:58mm/R:45mm
SPOKE HOLES	14G×20H/24H/28H/32H
WEIGHT	F:155g/R:245g
FINISH	Black/Silver/Blue/Golden



MS3951F/MS3951R

HUB SHELL	Alloy
AXLE MATERIAL	CR-MO
ROLLING SYSTEM	Loose Ball
OLD	F:100mm/R:135mm
PCD	F:58mm/R:58mm
SPOKE HOLES	14G×20H/24H/28H/32H
WEIGHT	F:270g/R:475g
FINISH	Black/Silver/Blue/Golden

Rove (NECO3-1+NECO4+RECTIFIER) Dynamo Hub Power Generator-UPS System

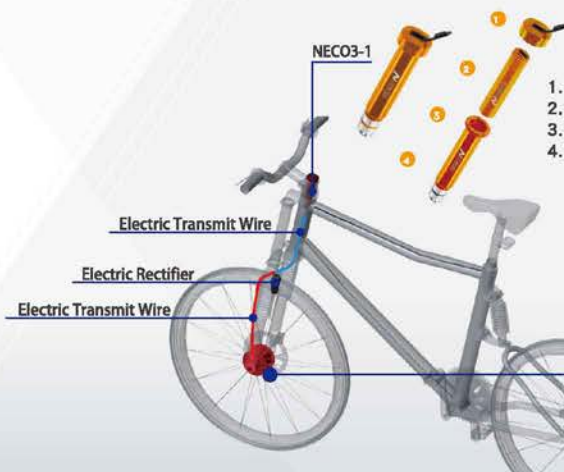

1. Dust Cover
2. Battery
3. Charger
4. Compression Plug



NECO4
Patent No.China : 5257748
5V-2A=10W
Global Maximum Bicycle
Dynamo Generator



| Taiwan: neco@necoparts.com • Tel: +886-4-23323966
| Shunde: sdneco@vip.126.com • Tel: +86-757-22626599

| Nanjing: neco-zj@163.com • Tel: +86-511-87455666/777/888
| Tianjin: tjneco@163.com • Tel: +86-22-59591629

boost hubs



DH866FCS



DH866RCSGX



DH867FBS



DH867RBSNY



DA209FCS



DA209RCSTX



RA209FAS



RA209RASTE



RA213FES



RA213RESTE



RH631FAS



RH631RASNY



DH825FLS



DH825RLSNS



DA201FCS



DA201RCSTE

mtb hubs

hydraulic seatpost



SP-3P05



SP-5H08



SP-5P08

available
offset : 100/115/125/150/170mm
diameter : Ø30.9 / Ø31.6mm





Ming Lun Sports (Huai'An) Co.,LTD 明倫運動器材(淮安)有限公司

江蘇省淮安經濟技術開發區深圳東路289號
NO.289 • Shenzhen East Road, Huai'an Economic And
Technical Development Zone, Jiangsu, China
T:+86-517-8989-7100 F:+86-517-8989-7071
E:ktsalesmgr@kthub.com

Ming Sports International Co.,LTD 明鋒貿易企業有限公司

台灣 42951 台中市神岡區庄前路28號
No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan
T:+886-4-2563-0919 F:+886-4-2563-0959
E:daniel@kthub.com E:leo@kthub.com

DHF112

Features 15x110MM

1. 6061 Hub Shell
2. High Strengthening Axle
3. Premium Cartridge Oversized Sealed Bearing
4. Wider Flange Spacing
5. Wider Bearing Spacing
6. Weight : 197g

Option : Super Boost 20x110mm: DHF412



DHF222

Features 15X100MM

1. 6061 Hub Shell
2. High Strengthening Axle
4. Wider High-Low Flange Spacing
5. Wider Bearing Spacing
7. 12mm Cap Available
6. Weight : 137g
7. 9mm / 12mm End Cap Available



DER115

Features 12X148MM

1. 6061 One-Piece Forged Hub Shell
2. High Strengthening One-piece 7075 Axle OD 17-19MM
3. Completed New One-piece forged 7075 Cassette
4. 6Pcs Premium Cartridge Oversized Sealed Bearing
5. Wider Flange Spacing
6. Wider Bearing Spacing
7. Low-Drag Labyrinthine Seal on DS
8. 45 Tooth Drive Ring / 5 Individual Pawls and Springs
9. Weight : 320g

Option : Sram XD Cassette Availab

le : KT-DHR1X5 309g






Ming Lun Sports (Hua'an) Co., LTD
明倫運動器材(淮安)有限公司

江蘇省淮安經濟技術開發區深圳東路289號
NO.289 • Shenzhen East Road, Huaian Economic And
Technical Development Zone, Jiangsu, China
T:+86-517-8989-7100 F:+86-517-8989-7071
E:ktsalesmgr@kthub.com

Ming Sports International Co., LTD
明鋒貿易企業有限公司

台灣 42951 台中市神岡區庄前路28號
No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan
T:+886-4-2563-0919 F:+886-4-2563-0959
E:daniel@kthub.com E:leo@kthub.com

DER115

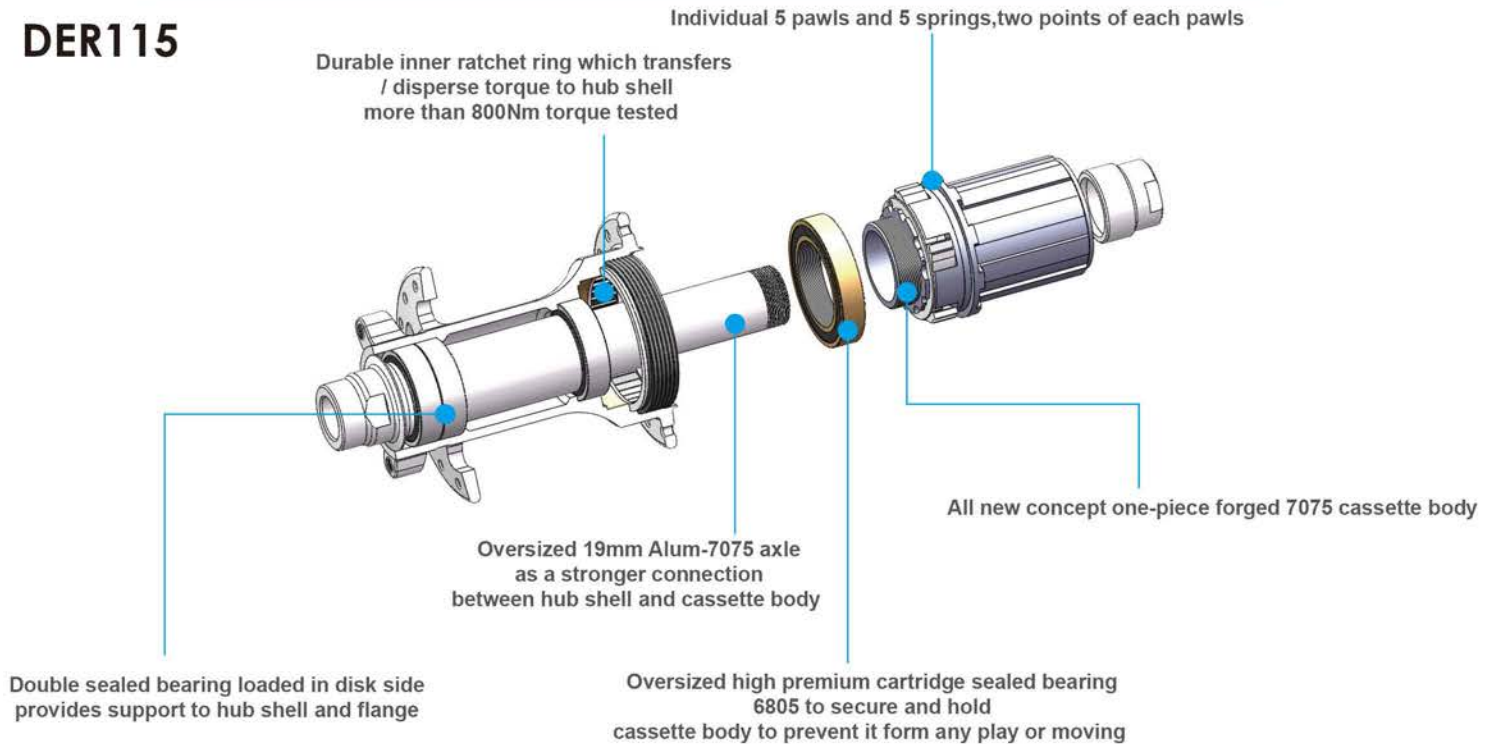



Ming Lun Sports (Huai'An) Co.,LTD 明倫運動器材(淮安)有限公司

江蘇省淮安經濟技術開發區深圳東路289號
NO.289 · Shenzhen East Road, Huaian Economic And
Technical Development Zone, Jiangsu, China
T:+86-517-8989-7100 F:+86-517-8989-7071
E:ktsalesmgr@kthub.com

Ming Sports International Co.,LTD 明鋒貿易企業有限公司

台灣 42951台中市神岡區庄前路28號
No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan
T:+886-4-2563-0919 F:+886-4-2563-0959
E:daniel@kthub.com E:leo@kthub.com

BXF112

Features

1. 6061 Hub Shell
2. High Strengthening Axle
3. Premium Cartridge Sealed Bearing
4. Wider Flange Spacing
5. Wider Bearing Spacing
- 6.Weight : 218g



BOLT : M10x1.0 , Option : 3/8 x 24T

BXF202

Features 20x110MM

1. 6061 Hub Shell
2. High Strengthening Axle
3. Premium Cartridge Oversized Sealed Bearing
4. Wider Flange Spacing
5. Wider Bearing Spacing
- 6.Weight : 170



BXR114

Features 150T

1. 6061 Hub Shell
2. One-piece forged 7075 Cassette , 1sp
3. Premium Cartridge Sealed Bearing
4. Wider Flange Spacing
5. Wider Bearing Spacing
6. Low-Drag Labyrinthine Seal on DS
7. 75 Tooth Drive Ring / 6 Individual Pawls and Springs with 1/2 engaged
- 8.Weight :289g



BMR214

Features

1. 6061 Hub Shell
2. One-piece forged Cnc Machined 9T Driver , 1sp
3. Premium Cartridge Sealed Bearing X4pcs + 1PCS Needle Bearing
- 4.24 Tooth Switchable Drive Ring / 3 Individual Pawls and Springs
5. Wider Bearing Spacing
- 6.LHD / RHD All In One
- 8.Weight : 566g

Option : Bolt Type with 3/8 Bolt : BMR114





Ming Lun Sports (Huai'An) Co.,LTD 明倫運動器材(淮安)有限公司

江蘇省淮安經濟技術開發區深圳東路289號
NO.289 • Shenzhen East Road, Huaian Economic And
Technical Development Zone, Jiangsu, China
T:+86-517-8989-7100 F:+86-517-8989-7071
E:ktsalesmgr@kthub.com

Ming Sports International Co.,LTD 明鋒貿易企業有限公司

台灣 42951 台中市神岡區庄前路28號
No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan
T:+886-4-2563-0919 F:+886-4-2563-0959
E:daniel@kthub.com E:leo@kthub.com


KT-M5ER 8/9/10/11S

Use: **DH, Boost, E-MTB**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Freewheel: **Cr-Mo Cassette 4 Pawls and 1spring**
Bearing: **Sealed. x 5pcs**
Axle: **Cr-Mo Steel**
Axle Dim: **19 (ID12)*148mm**
Weight: **461g**
Spoke: **14G. 32,36**
Flange PCD: **58mm**
Flange Spacing: **63mm**
Option: **Exchangable for Sram XD Driver**
KT-M4ER for center lock



Features

- Steel axle and Cr-mo cassette which provides stiffness for the torque carried form central motor
- Cassette with 3 pawls and 3pcs sealed bearings design is fully balancing the engagement that bring stability and durability
- One piece axle and exchangeable cassette for SRAM XD driver for easy maintenance and operation
- Approved by field test and Lab test

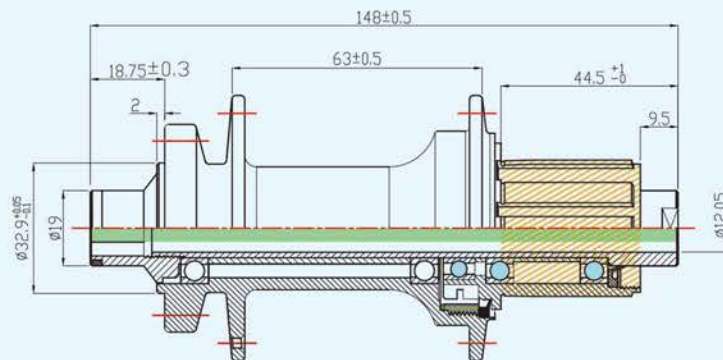

KT-TWXF

Use: **Downhill, Boost**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Bearing: **Sealed. x 2 pcs**
Axle: **7075 Alloy. Machined**
Axle Dim: **ID15*110mm**
Weight: **197g**
Spoke: **14G. 32,36**
Flange PCD: **58mm**
Flange Spacing: **64mm**
Option: **MS6F ID15*110mm**





Ming Lun Sports (Huai'An) Co.,LTD 明倫運動器材(淮安)有限公司

江蘇省淮安經濟技術開發區深圳東路289號
NO.289 · Shenzhen East Road, Huai'an Economic And
Technical Development Zone, Jiangsu, China
T:+86-517-8989-7100 F:+86-517-8989-7071
E:ktsalesmgr@kthub.com

Ming Sports International Co.,LTD 明鋒貿易企業有限公司

台灣 42951 台中市神岡區庄前路28號
No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan
T:+886-4-2563-0919 F:+886-4-2563-0959
E:daniel@kthub.com E:leo@kthub.com

KT-XF1F-12

Use: **Freeride, Gravel bike**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Bearing: **Sealed. x 2 pcs**
Axle: **7075 Alloy. Machined**
Axle Dim: **§1D12*100mm**
Weight: **69g**
Spoke: **14G. 32,36**
Flange PCD: **R:58mm/L:45mm**
Flange Spacing: **58mm**
Option: **KT-XF1F ID15*100mm**



KT-XF4R 115

Use: **Freeride, Gravel bike**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Freewheel: **Cr-Mo Cassette 3 Pawls and 1 spring**
Bearing: **Sealed. x 4pcs**
Axle: **Cr-Mo Steel**
Axle Dim: **19 (ID12)*142mm**
Weight: **377g**
Spoke: **14G. 32,36**
Flange PCD: **R:58mm/L:48mm**
Flange Spacing: **57mm**



KT-MSCF

Use: **Freeride, Gravel bike**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Bearing: **Loose balls**
Axle: **Cr-Mo Steel**
Axle Dim: **§12*100mm**
Weight: **244g**
Spoke: **14G. 32,36**
Flange PCD: **R:58mm/L:45mm**
Flange Spacing: **58mm**
Option: **KT-MSEF center lock model**



KT-SNCR 115

Use: **Freeride, Gravel bike**
Features: **Disc Brake Mount**
Body: **Alloy 1 Piece Forged. CNC**
Freewheel: **Cr-Mo Cassette 3 Pawls and 1 spring**
Bearing: **Loose balls**
Axle: **Cr-Mo Steel**
Axle Dim: **19 (ID12)*142mm**
Weight: **433g**
Spoke: **14G. 32,36**
Flange PCD: **R:58mm/L:48mm**
Flange Spacing: **57mm**
Option: **KT-SNDR center lock model**





TEL+886-4-8811738/9

FAX+886-4-8812386

info@wheelmate.com.tw

NEW

NEW
PRODUCT

www.yuhub.com.tw

■ DC-R33

holes 32/36H
spec M10*135W/M12*135W/M12*142W
axle AL7075, disc
FREE BODY 6 pawls alloy shimano 8-11S cassette,
54T ratchet, 108 clicks, Sram XD free body
available
Flange PCD 62mm
s.bearing 5
Weight/g 321

■ DC-R34

holes 32/36H
spec M12*148W, axle AL7075, disc
FREE BODY 6 pawls alloy shimano 8-11S cassette,
54T ratchet, 108 clicks, Sram XD free
body available
Flange PCD 62mm
s.bearing 5
Weight/g 328



CL-R34



CL-R33



CL-F23



CL-R23

CL-F33
CL-F34

NO 17-17, LUN TZY JIAO RD., SHI HWU,
CHANG HUA COUNTY 51448 TAIWAN

www.yuhub.com.tw

YU HUB INDUSTRY



TEL+886-4-8811738/9
FAX+886-4-8812386
info@wheelmate.com.tw

NEW

NEW
PRODUCT

www.yuhub.com.tw



ROAD & CITY



■ XRC-R09

holes 24H
spec M10*130W
FREE BODY 3 pawls alloy shimano 11S cassette,
W/washer for 10 speed, campy free
body available
s.bearing 4
Weight/g 225



■ XRC-F09

holes 20H
spec M9*100W
FREE BODY X
s.bearing 2
Weight/g 82



■ XCL-F02

holes 24H
spec M12*100/M15*100W
FREE BODY X
s.bearing 2
Weight/g 124
Center lock



■ XCL-R02

holes 28H
spec M10*135W/M12*142W
FREE BODY 6 pawls alloy shimano 11S cassette,
36T ratchet, 72 clicks, W/washer for
10 speed
s.bearing 4
Weight/g 303
Center lock



■ XDC-F06

holes 24H
spec M9*100W/M15*100W
FREE BODY X
s.bearing 2
Weight/g 145



■ XDC-R06

holes 24H
spec M10*135W/M12*142W
FREE BODY 3 pawls alloy shimano 11S cassette,
W/washer for 10 speed
s.bearing 4
Weight/g 255



■ CL-F27

holes 24H
spec M9*100/M12*100/M15*100W
FREE BODY X
s.bearing 2
Weight/g 147
Center lock



■ XRC-R08

holes 24H
spec M10*130W
FREE BODY 3 pawls alloy shimano 11S cassette, W/
washer for 10 speed, campy free body
available
s.bearing 4
Weight/g 231



■ RC-R40

holes 24H
spec M10*130W
FREE BODY 3 pawls alloy shimano 11S
cassette, W/washer for 10 speed,
campy free body available
s.bearing 4
Weight/g 244



■ CL-R27

holes 24H
spec M10*135W/M12*142W
FREE BODY 6 pawls alloy shimano 11S cassette,
36T ratchet, 72 clicks, W/washer for 10
speed
s.bearing 4
Weight/g 285
Center lock

NO 17-17, LUN TZY JIAO RD., SHI HWU,
CHANG HUA COUNTY 51448 TAIWAN

www.yuhub.com.tw

YU HUB INDUSTRY

TEL+886-4-8811738/9
FAX+886-4-8812386
info@wheelmate.com.tw

NEW NEW PRODUCT
www.yuhub.com.tw



XDC-F05

holes 32H
spec M9*100/M15*100W
FREE BODY X
s.bearing 2
Weight/g 180



XDC-R05

holes 32H
spec M10*135/M12*142W
FREE BODY 3 pawls alloy shimano 115 cassette
s.bearing 4
Weight/g 310



XDC-F03

holes 28H
spec M9*100/M15*100W
FREE BODY X
s.bearing 2
Weight/g 130



XDC-R03

holes 32H
spec M10*135/M12*142W
FREE BODY 3 pawls alloy shimano 115 cassette
s.bearing 4
Weight/g 300



XDC-F04

holes 32H
spec M15*110W
FREE BODY X
s.bearing 2
Weight/g 190
Boost MTB



XDC-R04

holes 32H
spec M12*148W
3 pawls alloy shimano 115 cassette
s.bearing 4
Weight/g 320
Boost MTB



XDC-F07

holes 24H
spec M15*110W
FREE BODY X
s.bearing 2
Weight/g 162
Boost MTB



DC-F27

holes 32H
spec M15*110W
FREE BODY X
Flange PCD 58/45mm
s.bearing 2
Weight/g 144
Boost MTB

DC-R27

holes 32H
spec M12*148W
FREE BODY 3 pawls alloy shimano 8-115 cassette, Sram 115 available
Flange PCD 58/58mm
s.bearing 4
Weight/g 294
Boost MTB



XDC-R07

holes 28H
spec M12*148W
FREE BODY: 3 pawls alloy shimano 115 cassette
s.bearing 4
Weight/g 263
Boost MTB

HUBS & WHEELSETS

NO 17-17, LUN TZY JIAO RD., SHI HWU,
CHANG HUA COUNTY 51448 TAIWAN

www.yuhub.com.tw




YU HUB INDUSTRY



TEL+886-4-8811738/9
FAX+886-4-8812386
info@wheelmate.com.tw

NEW NEW PRODUCT

www.yuhub.com.tw



BMX RACING



BR-R20(20 AXLE)

holes 36H
spec M20*110W
FREE BODY 1.37" thread
Flange PCD 47mm
s.bearing 1+bush
Weight/g 256



BR-03F

adaptor for M20*100W

holes 36H
spec M10*100W
Flange PCD 47mm
s.bearing 2
Weight/g 224



FIX GEAR



FA-01F

holes 24H
spec M9*100W*140L
s.bearing 2
Weight/g 198



FA-01R/FA-02R

holes 24H
spec M10*120W*166L
FREE BODY fix+fix
s.bearing 2
Weight/g 223
FA-02R for fix/free thread

FREEWHEEL

Fast engagement
Forged crmo material



TRIAL FREEWHEELS

TFW-135.9B

spec 9pawls-16/17/18 tooth,
ED finished
sealed bearing
Weight/g 175
REMARKS 135 clicks

SHIMANO SPLIND FOR ITEM
NO.: SFW-135.9 (Weight 170g)
Titanium material available
(Weight 118g)



BMX RACING FREEWHEEL

90.6B

spec 6pawls-16tooth,ED finished
alloy and crmo material available
sealed bearing
Weight/g 143
REMARKS 90 clicks



BFW-F9-108B

spec 9pawls-16/17/18 tooth,
ED finished
sealed bearing
Weight/g 177
REMARKS 108 clicks

NO 17-17, LUN TZY JIAO RD., SHI HWU,
CHANG HUA COUNTY 51448 TAIWAN

www.yuhub.com.tw

YU HUB INDUSTRY

TEL+886-4-8811738/9
FAX+886-4-8812386
info@wheelmate.com.tw

**CITY
ROAD**
www.yuhub.com.tw



RDC-F27

holes 24H
spec M9*100W, M15*100W, axle AL7075
FREE BODY x
Flange PCD 54mm/58mm
s.bearing 2
Weight/g 149
For cycle cross



XRC-S11

holes 24H
spec M10*130, axle AL7075, shimano 11S 7075AL cassette (hard anodized)
FREE BODY 3 pawls alloy shimano 11S Cassette, W/Washer for 10 speed, camp free body available
s.bearing 4
Weight/g 204



XRC-S11F

holes 24H
spec M9*100, axle AL7075
FREE BODY x
s.bearing 2
Weight/g 89



RC-S11

holes 24H
spec M10*130, axle AL7075, shimano 11 S 7075AL cassette(hard anodized)
FREE BODY 3 pawls alloy shimano 11S Cassette, W/Washer for 10 speed, camp free body available
Flange PCD 38mm/52mm
s.bearing 4
Weight/g 212

RC-R35

holes 24/28H
spec M10*130, axle AL7075, shimano 7075AL cassette 10S
FREE BODY 3 pawls alloy shimano 10S Cassette, camp free body available
Flange PCD 38mm/47mm
s.bearing 4
Weight/g 230



RC-F35

holes 20/24H
spec M9*100, axle AL7075
FREE BODY x
Flange PCD 32mm
s.bearing 2
Weight/g 77.5

XRC-F06

holes 20H
spec M9*100, axle AL7075
FREE BODY x
s.bearing 2
Weight/g 76.5



XRC-F05

holes 20/24H
spec M9*100, axle AL7075
FREE BODY x
s.bearing 2
Weight/g 86

HUBS & WHEELSETS

NO 17-17, LUN TZY JIAO RD., SHI HWU,
CHANG HUA COUNTY 51448 TAIWAN

www.yuhub.com.tw





12 SPEED

APPLY TO SRAM EAGLE SYSTEM

- Super Durability
- SLA Superior Lubricating Aid
- DHA Chromium Carbide Pin

12_s MK12, SLA1210

For 1x drivetrain



MK12



SLA1210

TITANIUM CHAIN

World's lightest chain



- 1/2"x 11/128"
- Titanium Material
- Super Durability
- SLA Superior Lubricating Aid
- DHA Chromium Carbide Pin

11_s SLA211 Silver, Ti-N Gold

10_s SLA210 Silver, Ti-N Gold

9_s SLA209 Silver, Ti-N Gold

CHAIN LIFE



KILOMETER

Chromium Molybdenum Alloy Steel
& Ni-PTFE Teflon Coating:
SLA Superior Lubricating Aid

SLA SERIES

- 1/2"x 11/128" 1/2"x 3/32" 1/2"x 1/8"
- Super Light • Super Durability
- SLA Superior Lubricating Aid
- DHA Chromium Carbide Roller & Pin
- Hollow Outer & inner plate and Pin : SLA110, SLA101, SLA901, SLA410
- Hollow Outer-plate : SLA-H11, SLA-H10, SLA-H9, SLA-H8
- Hollow Pin : SLA1110

11_s SLA110, SLA-H11, SLA1110

10_s SLA101, SLA-H10

9_s SLA901, SLA-H9

8_s SLA-H8

1_s SLA410



Silver



Ti-N Gold



Ti-N Black

LIGHT SERIES CHAIN

- 1/2"x 11/128" 1/2"x 3/32" 1/2"x 1/8"
- Hollow Outer-plate : SH10, SH9, SH410
- Hollow Pin : S1010, S9010, S8010

10_s S1010(Silver), SH10(Silver, Silver/Gray)

9_s S9010(Silver), SH9(Silver, Silver/Gray, Gray/Gray)

8_s S8010 (Silver)

1_s SH410 (Silver)



S1010



SH10



S9010



SH9



S8010



SH410

ENTRY LEVEL

- 1/2"x 11/128" 1/2"x 3/32" 1/2"x 1/8"



11_s S11(Silver)

10_s S10(Silver, Silver/Gray)

9_s S9(Silver, Silver/Gray, Gray/Gray)

8_s S8, S88(Silver, Silver/Gray, Gray/Gray)

7_s S52, S50

6_s S20

1_s S410, S410H, S410A, S512H

EXERCISER CHAIN 25H



S11



S9-S



S52



S410H



S10-S2



S9



S50



S410A



S10-S



S88



S20



S512H



S9-S2



S8



S410



25H

BMX SERIES

MK918, MK918H (Heavy Duty), MK926 (Light)

• Special Half Link Design

1^{1/8} MK918, MK918H, MK926

1^{3/32} MK918N, MK926N



MK926



MK926-G2



MK918
MK918H



MK918-G2
MK918H-G2

MK747

1^{1/8} MK747, MK747L, MK747SL



MK747

1^{3/32} MK747N, MK747NSL



MK747S2



E-BIKE

- Special design for Mid-Motor System
- Compatible Bike : Mid-Motor e-Bikes, BOSCH e-Bike System and other e-Bike System
- Anti-rust is available by request

11_s S11e, S11eRB

10_s S10e, S10eRB

9_s S9e, S9eRB

8_s S8e, S8eRB

1_s S512e, S512eRB, MK410



S11e



S8e



S10e



S512e



S9e

ANTI-RUST SERIES

11_s 10_s 9_s 8_s 7_s 6_s 1_s

Anti-Rust Series for all speed bike

RUST RESISTANCE



* Salt Spray Testing Results



S11eRB



S8eRB



S10eRB



S512eRB



S9eRB

NEW!



MK410RB

QRs-Quick Release Safety Link (Reusable)


For your safety consideration, please use YBN QRs.

11_s 10_s 9_s 8_s 7_s 6_s 1_s



Third restrict section and fourth restrict section will limit and lock the pin which keep the pin stay in stable to achieve high durability

Fourth restrict section will limit and lock the pin which keep the pin stay in stable to achieve high durability

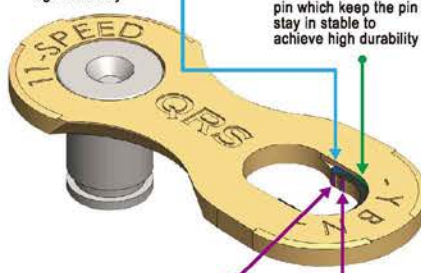

Two safe section designs will hold the pin and prevent loosening

Two safe section designs will hold the pin and prevent loosening



SPRING CLIP CL



QF



OFFSET LINK
2 PITCH



U.S. Invention Patent: US 8540597 B2
TW Invention Patent: I408287
China Invention Patent: ZL200920179712.9

Steel Pipes



Material	SCM415-SCM430
	STKM 11A
	STKM 13A
	STKM 18A
	STKM 22A
	STKM 2AD
Purpose	All kinds of materials, such as "CR", HR, P/O, GI, G2, 1A", and so on
	bicycle pipe, motorcycle pipe, automobile pipe, furniture pipe, office supplies pipe, construction pipe, etc.



CONNECT THE WORLD • INFINITE POSSIBILITY

KSPYC

C H A I N



E-bike



Zn/Ni-TECH | Superior Anti-rust Capabilities
650 hours in a Salt Spray Test



BMX Bike



Mountain Bike



Road Bike



www.kspyc.com



TAYA
TAYA Chain Co. Ltd

**TAIPEI CYCLE
K0610
BOOTH**



25 years Rust-Proof & Eco-Friendly
Quality Certification

Chrysler

Ford

BMW



8 Times Higher Torque Resistance

Chains for Future Solution

HOT

e BIKE-Series **NEW**
Silver / Silver & GST




e ONZE-111



11S

e DECA-101




10S

e NOVE-91



9S

e OCTO-DH



8S



PRIMO BOX PKG **NEW**

DESIGNED PANEL PKG

COLOUR PANEL PKG



NEW Ti-Gold / Ti-Black Chains PKG

A close-up, high-contrast photograph of a bicycle's rear wheel hub and spokes. The spokes are thin and metallic, radiating from a central hub. A prominent red, gear-like component is visible on the left side of the hub. The background is a solid, light color, making the metallic parts stand out.

YOUR ACCESS TO THE BICYCLE INDUSTRY

EVERYTHING ABOUT BICYCLE IS ALL IN
www.abm.world